

GUIDE

erwin Data Intelligence

Mapping Management Guide 15.0



Legal Notices

This Documentation, which includes embedded help systems and electronically distributed materials (hereinafter referred to as the Documentation), is for your informational purposes only and is subject to change or withdrawal by Quest Software, Inc and/or its affiliates at any time. This Documentation is proprietary information of Quest Software, Inc and/or its affiliates and may not be copied, transferred, reproduced, disclosed, modified or duplicated, in whole or in part, without the prior written consent of Quest Software, Inc and/or its affiliates

If you are a licensed user of the software product(s) addressed in the Documentation, you may print or otherwise make available a reasonable number of copies of the Documentation for internal use by you and your employees in connection with that software, provided that all Quest Software, Inc and/or its affiliates copyright notices and legends are affixed to each reproduced copy.

The right to print or otherwise make available copies of the Documentation is limited to the period during which the applicable license for such software remains in full force and effect. Should the license terminate for any reason, it is your responsibility to certify in writing to Quest Software, Inc and/or its affiliates that all copies and partial copies of the Documentation have been returned to Quest Software, Inc and/or its affiliates or destroyed.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, QUEST SOFTWARE, INC. PROVIDES THIS DOCUMENTATION AS IS WITHOUT WARRANTY OF ANY KIND, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT. IN NO EVENT WILL QUEST SOFTWARE, INC. BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY LOSS OR DAMAGE, DIRECT OR INDIRECT, FROM THE USE OF THIS DOCUMENTATION, INCLUDING WITHOUT LIMITATION, LOST PROFITS, LOST INVESTMENT, BUSINESS INTERRUPTION, GOODWILL, OR LOST DATA, EVEN IF QUEST SOFTWARE, INC. IS EXPRESSLY ADVISED IN ADVANCE OF THE POSSIBILITY OF SUCH LOSS OR DAMAGE.

The use of any software product referenced in the Documentation is governed by the applicable license agreement and such license agreement is not modified in any way by the terms of this notice.

The manufacturer of this Documentation is Quest Software, Inc and/or its affiliates Provided with Restricted Rights. Use, duplication or disclosure by the United States Government is subject to the restrictions set forth in FAR Sections 12.212, 52.227-14, and 52.227-19(c)(1) - (2) and DFARS Section 252.227-7014(b)(3), as applicable, or their successors.

Copyright © Quest Software, Inc. and/or its affiliates All rights reserved. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Contact erwin

Understanding your Support

Review [support maintenance programs and offerings](#).

Registering for Support

Access the [erwin support](#) site and click Sign in to register for product support.

Accessing Technical Support

For your convenience, erwin provides easy access to "One Stop" support for [erwin Data Intelligence \(erwin DI\)](#), and includes the following:

- Online and telephone contact information for technical assistance and customer services
- Information about user communities and forums
- Product and documentation downloads
- erwin Support policies and guidelines
- Other helpful resources appropriate for your product

For information about other erwin products, visit <http://erwin.com/>.

Provide Feedback

If you have comments or questions, or feedback about erwin product documentation, you can send a message to distechpubs@erwin.com.

News and Events

Visit [News and Events](#) to get up-to-date news, announcements, and events. View video demos and read up on customer success stories and articles by industry experts.

Contents

Mapping Manager	11
Creating and Managing Mapping Specifications	13
Creating Projects	14
Adding Documents	17
Assigning Users	20
Assigning Roles	22
Configuring Extended Properties	25
Default Connector	29
Reference Data Manager	34
Importing from Excel	38
Adding Tasks	40
Configuring Task Types	45
Managing Tasks	60
Creating Subject Areas	63
Subject Areas	63
Nested Subject Areas	64
Managing Subject Areas	67
Managing Projects	69
Defining Transformations	71
Configuring Transformation Library	74
Uploading Transformations	77
Downloading Templates	78

Managing Transformations	79
Creating Maps	83
Drag and Drop	89
Creating Mapping Specifications using Metadata Search View	89
Creating Mapping Specifications Using Metadata Tree View	94
Setting Target Update Strategy	96
Graphical Designer	98
Creating Mapping Specifications using Metadata Search View	98
Creating Mapping Specifications using Metadata Tree View	106
Setting Target Update Strategy	112
Auto-Map	115
Creating Mapping Specifications	115
One to Many and Many to Many Mapping Specifications	124
Creating Mapping Specifications Using Metadata Search View	124
Creating Mapping Specifications Using Metadata Tree View	131
Setting Target Update Strategy	134
Adding Transformation and Lookup Details	136
Adding Transformation Details	136
Adding Lookup Details	141
Graphical Designer	144
Adding Transformation Details	144
Adding Lookup Details	148
Updating Mapping Specifications Manually	150

Uploading Mapping Specifications in XML	153
Specifying XPath in Mapping Specifications	156
Setting Column Order and Visibility	158
Column Order	158
Column Visibility	158
Updating Additional Mapping Information	160
Updating Map Spec Overview	163
Updating Source Extract SQL	166
Setting Target Update Strategy	168
Updating Testing Notes	170
Adding Mapping Specification Documents	172
Assigning Mapping Specifications to Users	174
Linking Additional Specification Artifacts	177
Recording Level of Effort	179
Viewing Change Logs	181
Viewing Release Information	182
Adding Tasks	183
Configuring Task Types	187
Managing Tasks	202
Configuring Extended Properties	205
Default Connector	209
Reference Data Manager	214
Importing from Excel	218

Branching and Merging Maps	220
Branching Maps	221
Merging Changes into Parent Maps	224
Deleting Maps	227
Viewing Workflow Logs	229
Analyzing Mappings	231
Generating Virtual Preview of Targets	232
Previewing Data	234
Performing Table Gap Analysis	238
Performing Column Gap Analysis	242
Running Impact Analysis	246
Running Lineage Analysis	247
System	248
Viewing Lineage	248
Working on Lineage	255
Environment	261
Viewing Lineage	261
Working on Lineage	268
Table	274
Viewing Lineage	274
Working on Lineage	282
Column	289
Viewing Lineage	289

Working on Lineage	298
Running End to End Lineage	305
Opening Business View	309
Viewing Mapping Statistics	314
Associating Mappings	316
Associating Code Maps with Data Item Mappings	317
Publishing Code Maps	317
Associating Code Maps	319
Associating Reference Tables with Mappings	322
Linking Requirements to Mappings	324
Publishing and Creating Versions of Mappings	326
Creating Versions of Maps	327
Base-lining Projects	330
Comparing Two Different Mapping Versions	332
Publishing Mappings	334
Publishing Mappings	334
Updating Publishing Details	337
Restoring Archived Maps As Active	339
Exporting Mapping Specifications	342
Proprietary XML Format	343
TXT Format	345
Creating and Managing Test Cases for Mappings	349
Creating Test Cases	350

Creating Project-Level Test Cases	350
Creating Map-Level Test Cases	352
Adding Validation Steps	356
Adding Validation Steps to Project-Level Test Cases	356
Adding Validation Steps to Map-Level Test Cases	358
Adding Documents	361
Adding Documents to Project-Level Test Cases	361
Adding Documents to Map-Level Test Cases	364
Managing Test Cases	368
Managing Project-Level Test Cases	368
Managing Map-Level Test Cases	369
Viewing Mapping Manager Dashboard	371
Statistics	373
Mapping Summary	373
Mapping Status	375
Proactive Impact Analysis - Truncation Impacts	377
Project Overview	379
Mapping Classification	380
Mapping Assignments	382
Sources/Targets Not Mapped	383
Test Case Status	385
Project Test Cases	387
User Test Cases	388

Mapping Manager

Mapping Manager is the core of erwin Data Intelligence (erwin DI), where you do the following:

- Source to target mappings using the Metadata Tree View
- Associate crosswalks to mappings using the Code Mapping Catalog
- Associate reference data to mappings using the Reference Table Catalog
- Associate requirements to mappings using the Specification Artifact Catalog
- Create new mapping versions
- Specify test cases

Once mappings are approved for coding, ETL developers can export them as coding requirements. They can also export the mappings to XML and automatically generate ETL/ELT jobs for ETL tools, such as Informatica PowerCenter, IBM DataStage, Microsoft SQL Server SSIS, and so on.

To access the Mapping Manager, go to **Application Menu > Data Catalog > Mapping Manager**. The Mapping Manager dashboard appears:

The screenshot shows the erwin Data Intelligence Mapping Manager interface. The top navigation bar includes the erwin Data Intelligence logo, the Mapping Manager title, a search bar, and various utility icons. The left sidebar is divided into 'Workspace Mappings' (labeled 1) and 'Published Mappings' (labeled 4). The 'Workspace Mappings' section shows a tree view of projects, including 'Amazon Test (1)', 'batter (1)', 'Del (0)', 'DigitalAdoption (4)', 'erwinDIS (7)', 'ffgg (2)', 'FlowTest (3)', 'Hi-Tunes (2)', 'Lineage Demo (14)', 'Project (4)', and 'project 1 (4)'. The main area displays the 'Project Summary' table (labeled 2), which lists projects with columns for #, Project Name, Project Description, Project Owner, Subj. Cour, Map. Cour, Created By, Created Date Time, Last Modified By, and Last Modified Date Time. The table contains five rows of data. At the bottom, the 'Mapping Manager Dashboard' section (labeled 3) is visible.

#	Project Name	Project Description	Project Owner	Subj. Cour	Map. Cour	Created By	Created Date Time	Last Modified By	Last Modified Date Time
1	Lineage Demo			0	14	Administratc	26-02-2020 04:01:32	Administrato	26-02-2020 04:01:32
2	Test Source			0	3	Administratc	26-02-2020 04:02:38	Administrato	26-02-2020 04:02:38
3	TestData Map			0	30	Administratc	26-02-2020 04:03:32	Administrato	26-02-2020 04:03:32
4	TestMap			0	5	Administratc	26-02-2020 04:04:19	Administrato	26-02-2020 04:04:19
5	WhatfixTrial			0	1	Administratc	16-03-2020 05:30:34	Administrato	16-03-2020 05:30:34

Mapping Manager	
UI Section	Function
1-Workspace Mappings	Use this pane to browse and work on projects and mappings.
2-Central Pane	Use this pane to view or work on the data based on your selection in the browser pane.
3-Mapping Manager Dashboard	Use this pane to view statistics related to mappings and projects.
4-Published Mappings	Use this pane to view and export details of published mappings.

Managing mappings involves the following:

- [Creating and managing mapping specifications](#)
- [Analyzing mappings](#)
- [Associating mappings](#)
- [Publishing and creating mapping versions](#)
- [Exporting mapping specifications](#)
- [Creating and managing test cases for mappings](#)
- [Viewing mapping manager dashboard](#)

Creating and Managing Mapping Specifications

After defining systems and uploading metadata in the Metadata Manager, you can create mapping specifications. The Mapping Manager offers multiple ways to create mapping specifications. This section walks you through building metadata driven source to target mapping specifications and enterprise standards to manage them.

Creating and managing mapping specifications involves:

- [Creating projects](#)
- [Defining transformations](#)
- [Creating maps](#)
- [Adding transformations and lookup details](#)
- [Updating mapping specifications manually](#)
- [Uploading mapping specifications in XML format](#)
- [Specifying XPath in mapping specifications](#)
- [Setting column order and column visibility](#)
- [Updating additional mapping information](#)
- [Branching and merging maps](#)
- [Deleting maps](#)
- [Viewing workflow logs](#)

Creating Projects

Projects store and group maps in a hierarchy, Projects > Mappings. You can create an ETL tool-specific project and specify its details, such as project description, project manager, business sponsor, cost center, and IT sponsor.

To create projects, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click the **Projects** node.

Workspace Mappings		Project Summary	
		#	Project Name
Mappings			
Transformations			
Projects			
Academy		1	ERP
Alumni		2	EDW
BE		3	Sales Data Mart
BF			
Career (7)			
Data Lake Migration (3)			
EDW (2)			

3. Click **Create Project**.

The Create Project page appears.

Creating Projects

The screenshot shows the 'Project Details' form. At the top, there are tabs for 'Project Details', 'Project Documents', 'Project Users', and 'Project Roles'. Below the tabs are three buttons: 'Save & Continue', 'Save & Exit', and 'Cancel'. The form fields include: 'Project Name*' (a text input field), 'Cost Center' (a text input field), 'Description' (a large text area with a rich text editor toolbar), 'Project Manager Name' (a text input field), 'IT Sponsor Name' (a text input field), 'Business Sponsor Name' (a text input field), 'Project ETL' (a dropdown menu currently showing 'BODS Pseudocode'), and a toggle switch for 'Enable display of Transformation without pseudocode' which is currently set to 'NO'.

4. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Project Name	Specifies the name of the project. For example, Data Lake Migration. For more information on naming conventions, refer to the Best Practices section.
Description	Specifies the description of the project. For example: The project contains the mapping specifications for the sales data migration.
Project Manager Name	Specifies the project manager's name. For example, John Doe.
Business Sponsor Name	Specifies the business sponsor of the project. For example, ABC Consulting Services.
Project ETL	Specifies the ETL tool assigned to the project. For example, Informatica Pseudocode.
Cost Center	Specifies the cost center of the project. For example, Finance and Accounting.

Creating Projects	
Field Name	Description
IT Sponsor Name	Specifies the IT sponsor of the project. For example, XYZ IT Services.
Enable display of Transformation without pseudocode	Specifies whether the transformation is displayed without pseudocode. Switch Enable display of Transformation without pseudocode on () to display transformation without pseudocode.

5. Click **Save and Exit**.

A new project is created and added to the project tree.

Once a project is created, you can enrich it further by:

- [Adding supporting project documents](#)
- [Assigning users to the project](#)
- [Configuring extended properties](#)
- [Creating Tasks](#)
- [Creating subject areas](#)
- [Creating maps](#)
- [Tagging projects](#)

You can also manage a project by using the options available on right-clicking the project.

Managing projects involves:

- Uploading legacy maps
- Export mappings
- Export change logs
- Viewing reports
- Sharing links
- Deleting projects
- Viewing workflows


Adding Documents

You can add supporting documents, such as text files, audio files, video files, document links, and so on to a project.

To add documents to projects, follow these steps:

1. In the **Workspace Mappings** pane, click a project.
2. Click the **Project Documents** tab.

The following page appears.

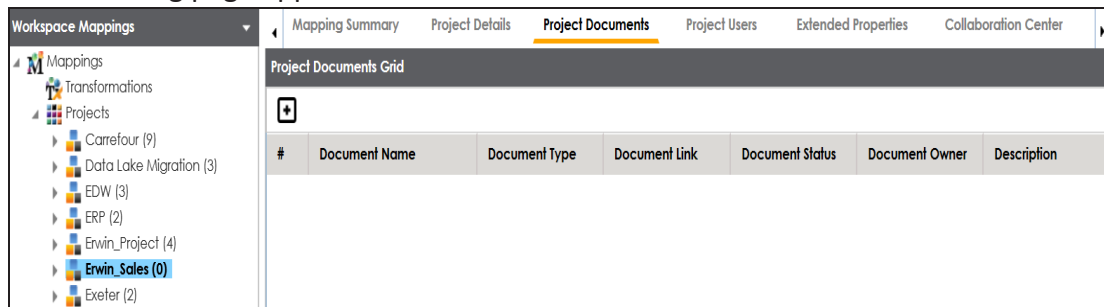

3. Click .

The Add Project Document page appears.

The screenshot shows the 'Add Project Document' form. It includes the following fields and controls:


- Document Name***: Text input field.
- Document Reference**: Text input field.
- Reference Number**: Text input field.
- Document Link**: Text input field.
- Description**: Rich text editor with a toolbar containing icons for bold, italic, underline, list, link, unlink, and other text formatting options.
- Document Owner**: Text input field.
- Document Object**: Text input field.
- Drag-n-Drop files here or click to select files for upload.**: A large area with a blue upload icon.
- Approval Required Flag**: A checkbox.

Adding Documents

datory. Refer to the following table for field descriptions.

Option	Description
Document Name	Specifies the name of the physical document being attached to the project. For example, Project Details.
Document Reference	Specifies the name of the reference document. For example, Wikipedia pages.
Reference Number	Specifies the reference number of the reference document. For example, KB_230145.
Document Owner	Specifies the document owner's name. For example, John Doe.
Document Object	Drag and drop or use  to browse and select the document.
Document Link	Specifies the URL of the document. For example, https://drive.google.com/file/d/2sC2_SZlyeFKI7OOOn-b5YkMBq4ptA7jh5/view
Description	Specifies the description of the document. For example: The document is to keep a record of description and data dictionary of the system.
Approval Required Flag	Specifies whether the document requires approval or not. Select the Approval Required Flag check box to select the document status.
Document Status	Specifies the status of the document. For example, In Progress. Select the status of the document from the drop down. This field is available only when the Approval Required Flag check box is selected.

- Click .

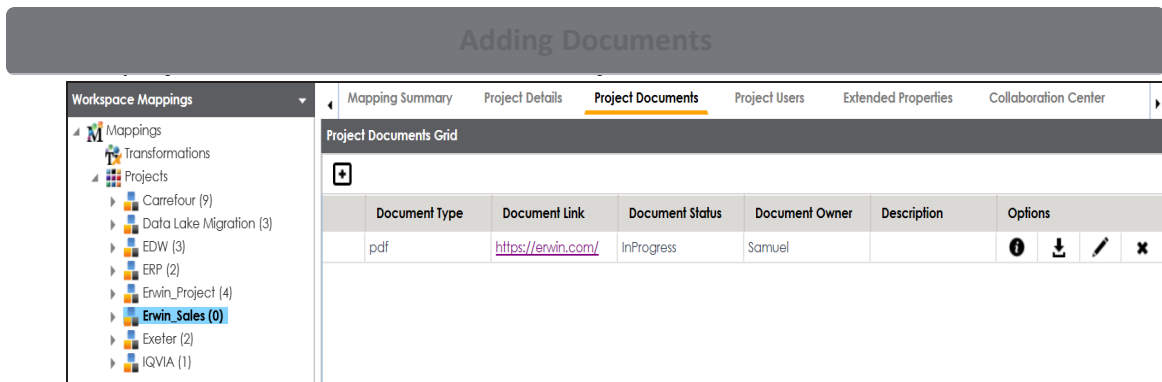

Once a supporting document is added, use the following options:

Information ()

Use this option to view the document information.

Download ()

Use this option to download the document.

Edit ()

Use this option to update the document details.

Delete()

Use this option to delete the document that is not required.

Assigning Users

You can assign one or more members of your team to a project. Team members assigned to a project have write access to all mappings under it. Ensure that the roles assigned to the users have the required permissions.

To assign users, follow these steps:


1. In the **Workspace Mappings** pane, click a project.
2. Click the **Project Users** tab.

The Project Users page appears.

#	User ID	User Full Name	Assigned Role	Email ID	Manager Name
1	esimpson	Erica Simpson	Data Owner_GER	e.simpson@xyz.	
2	jadams	Joey Adams	Tech Data Steward_GER	jadams@xyz.com	
3	janedoe	Jane Doe	Mapping Designer	jane.doe@edufir	K.Sridhar

3. Click

The Assign Project Users page appears.

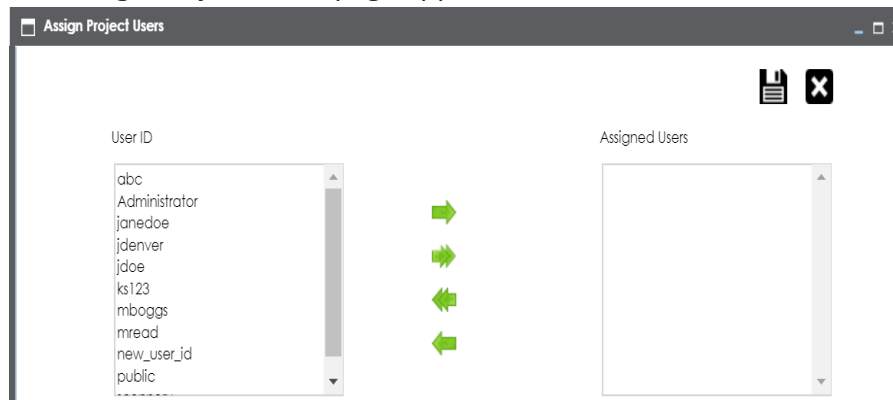

4. Select user IDs under User ID list-box and move them to Assigned Users list-box using the arrows (➡ or ➡➡). Similarly, to change existing user assignment, select user IDs

Assigning Users

arrows ( or ).



You cannot assign users with Administrator role to projects.

5. Click .

The selected users are assigned to the project.

Project Users							
							
#	User ID	User Full Name	Assigned Role	Email ID	Manager Name	View	Edit Delete
1	esimpson	Erica Simpson	Data Owner_GER	e.simpson@xyz.			 
2	jadams	Joey Adams	Tech Data Steward_GER	jadams@xyz.com			 
3	janedoe	Jane Doe	Mapping Designer	jane.doe@edufir	K.Sridhar		 
4	jwilson	Joey Wilson	Tech Data Steward_RO	jwilson@xyz.com			 

Use the following options to work on the project users list:

Information ()

Use this option to view project user details, such as telephone number, company, and the assigned responsibility.

Edit ()

Use this option to update project user details, such as assigned role and assigned responsibility.

Delete ()

Use this option to remove a user from the project users list.

Assigning Roles

You can assign one or more roles to a project. Users assigned to these roles get write access to all the mappings in the project. Ensure that the roles have the required permissions to access the Mapping Manager.

To assign roles, follow these steps:

1. In the **Workspace Mappings** pane, click a project.
2. Click the **Project Roles** tab.

The Project Roles page appears.

Workspace Mappings

Mappings

Transformations

Projects

ABC (2)

dgfd (0)

DigitalAdoption (0)

erwinDIS (5)

Transformations

Mapping Summary

Project Details

Project Documents

Project Users

Project Roles

Extended Properties

Collaboration Center

Project Roles

#	Role Name	Role Description	Role Users
1	Data Owner_RO	This role is accountable for who has access to information assets within their functional areas fr	View
2	Data Steward_RO	This role is responsible for utilizing Romania's data governance processes to ensure fitness	View
3	Mapping Admin	Administers Mapping Manager module to define, edit or delete any mapping in any project irres	View

3. Click .

The Assign/Unassign Roles page appears.

Assigning Roles

#	Select Role	Role Name	Role Description	Role Users
	☐			
1	☒	Data Owner_RO	This role is accountable for who has access to information assets within their functional areas for Romania. It may decide to review and authorize each access request individually or may define a set of rules that determine who is eligible for access based on business function, support role, etc.	View
2	☒	Data Steward_RO	This role is responsible for utilizing Romania's data governance processes to ensure fitness of data elements - both the content and metadata.	View
3	☒	Mapping Admin	Administers Mapping Manager module to define, edit or delete any mapping in any project irrespective to project assignment	View
4	☐	Mapping_Tester		View
5	☐	Tech Data Steward_UK	This role is responsible to answer how data is created, transformed, stored, and moved in technical systems for UK.	View

4. Select the required roles.

5. Click .

The selected roles are assigned to the project.

Project Roles			
			
#	Role Name	Role Description	Role Users
1	Data Owner_RO	This role is accountable for who has access to information assets within their functional areas for	View
2	Data Steward_RO	This role is responsible for utilizing Romania's data governance processes to ensure fitness	View
3	Mapping Admin	Administers Mapping Manager module to define, edit or delete any mapping in any project irres	View
4	Tech Data Steward_UK	This role is responsible to answer how data is created, transformed, stored, and moved in techr	View

You can view the users assigned to roles. To view Role Users, click **View**.

For example, the following Role Users page displays the users assigned to the Data Owner_RO role.

Role Users

	User ID	User Full Name
1	ksridhar	Kartik Sridhar
2	srahim	Syed Rahim

Configuring Extended Properties

You can configure user-defined project properties under the Extended Properties tab. First, you need to set up a form and then use it to configure the user-defined extended properties.

To configure extended properties of projects, follow these steps:

1. In the **Workspace Mappings** pane, click a project.
2. Click the **Extended Properties** tab.

The screenshot shows the 'Workspace Mappings' pane on the left with a tree view containing 'Mappings', 'Transformations', 'Projects', and 'DigitalAdoption (7)'. The 'DigitalAdoption (7)' project is selected. The main area shows the 'Extended Properties' tab with a 'Form Values' section. The form includes fields for 'Radio', 'Text Box', 'Combo Box', 'Module', 'Resource Manager', and 'Metadata Manager'. The 'Radio' field is currently selected.

3. Click **Configure**.

The screenshot shows the 'Extended Properties Configuration' dialog box. It has a 'Field Controls' section with buttons for 'Group', 'Text Box', 'Combo Box', 'List', 'Radio', 'Check Box', 'Number', 'Boolean', 'Date Picker', and 'Category'. The 'Radio' control is selected. The 'Configure Form' section shows a form with fields for 'Radio', 'Text Box', 'Combo Box', 'Module', 'Resource Manager', and 'Metadata Manager'. The 'Radio' field is currently selected. The 'Properties' section shows a table with the following data:

Property	Value
Published	☒
Field	Radio
Type	Radio
Configure Values	Configure
Description	
Visible in Extended Properties	☒

Configuring Extended Properties

- **Field Controls:** Use this pane to get the required UI elements.
 - **Configure Form:** Use this pane to design forms using the UI elements available in the **Field Controls** pane.
 - **Properties:** Use this pane to view the properties of the UI element selected in the **Configure Form** pane.
4. Click **Edit**. Then, double-click or drag and drop the required UI elements from the **Field Controls** pane to the **Configure Form** pane.
 5. Select UI elements, one at a time, and configure their properties in the **Properties** pane.

Extended Properties Configuration

Save Cancel Delete

Field Controls

Text Box Check Box Number Boolean Date Picker Category Rich Editor

Configure Form

Check Box ☐

Rich Editor

Property	Value
Published	☒
Field	Rich Editor
Type	Rich Editor
Dependencies	Type or click here
Configure Values	Configure
Mandatory	☐
Regular Expression	

Note: 1. Double click on the field cell to update the field name
2. Select the field name to update its properties



The available properties differ based on the type of UI element.

Refer to the following table for property descriptions:

Property	Description
Published	Switch Published to ON to publish the field.

Configuring Extended Properties

Property	Description
Field	Specifies the field label. To change the field labels, double-click the corresponding Value cell. For example, Project Approved On.
Type	Specifies the type of the field. To select field types, double-click the corresponding Value cell. For example, Date Picker.
Dependencies	Defines the pick list that can be used as controlling fields. It works only with the Reference Data Manager connector. To define pick list, select the fields from the drop down option.
Configure Values	Specifies the connectors for the field. To enter option values, click Configure Values. Use the following options: ▪ Default connector: Use this option to enter option values manually or using an MS Excel file. ▪ Reference Data Manager: Use this option to pull option values from reference tables in the Reference Data Manager.
Mandatory	Specifies whether the field is mandatory.
Description	Specifies the field description. To enter field descriptions, double-click the corresponding Value cell.
Visible in Extended Properties	Switch Visible in Extended Properties to ON to make it visible on the Extended Properties tab.
Order	Specifies the order of the field on the Extended Properties tab. To enter the order number, double-click the corresponding Value cell. You can also drag and move fields in the Configure Form pane to change their order.

6. Click **Save**.

Configuring Extended Properties

You can download extended properties in the XLSX format and use it as a template to [import extended properties](#). To download extended properties, on the **Extended Properties** tab, click **Export To Excel**.

Default Connector

When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the default connector to import option values from an MS Excel file or enter them manually.


To configure option values using the default connector, follow these steps:

1. In the **Configure Form** section, click the required UI element.

Ensure that you are in edit mode.

2. In the **Properties** section, click **Configure**.

The Connectors page appears.

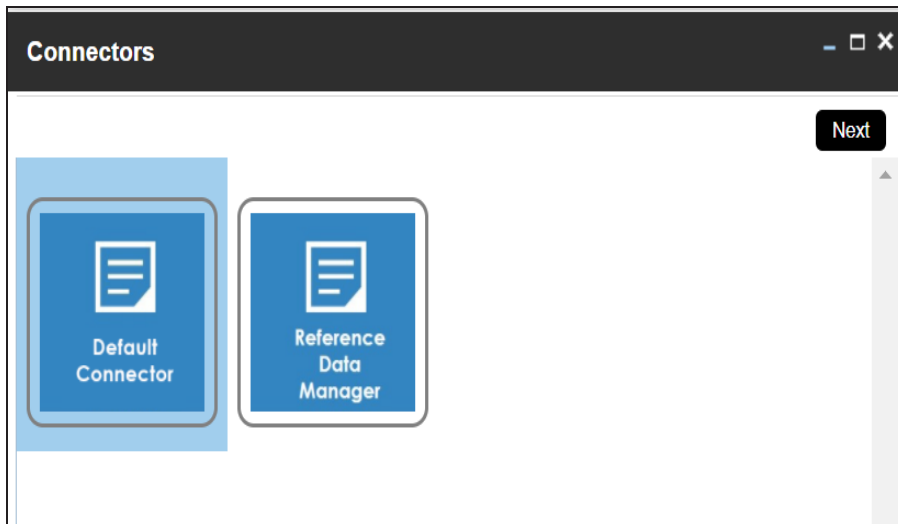

3. On the **Connectors** page, ensure that the Default Connector option is selected. Then, click **Next**.

The <UI_Element> Options page appears. For example, if the UI element is Combo Box, the Combo Box Options page appears.

Default Connector

Combo Box Options

Add Save Delete Import Excel

Text	Value

4. Use the following options:

Add

Use this option to enter text and value manually.

Import Excel

Use this option to import options from MS Excel files.

5. After configuring option values, click **Save**.

To add option values manually, follow these steps:

1. Click **Add**.
2. Enter values in the Text and Value fields.

The Text corresponds to options whereas the Value corresponds to underlying value of an option. You can add as many values as needed.

Default Connector

Add

Save

Delete

Import Excel

Text	Value
Data Steward_GER	rcooper
Data Steward_ROM	vsmith

- Click **Save**.

The option values appear in the UI element under the Configure Form section.

Combo Box

Select an option

Select an option

Data Steward_GER

Data Steward_ROM

To import option values from MS Excel files, follow these steps:

- Click **Import Excel**.

The Upload Excel page appears.

Upload Excel

Attach Excel File No file chosen

Note*:

1. Empty FIELD pairs are ignored.
2. Duplicate FIELD pairs are ignored.
3. Slash(/) FIELD pairs are ignored.
4. FIELD pair with more than 200 characters are ignored.

2. Click **Choose File** and select the required MS Excel file.

The Upload Excel page appears. It displays the data in the MS Excel file.

Upload Excel			
 			
#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards	Data Steward_GER	mmannigan
2	Data Stewards	Data Steward_GER	mmenza
3	Data Stewards	Data Steward_GER	mmannigan

3. Double-click the **Select Column To Import** cell in the required column.


The available options appear.

 			
#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards	Select Column To Import FIELD VALUE Clear Selection	mmannigan

Field corresponds to options and Value corresponds to value of an option. You can import multiple columns. Use Clear Selection to undo the selection.

5. Click .


The <UI_Element> Options page appears. It displays the imported columns. You can delete a row that is not required. To delete rows, click a row and then click **Delete**.

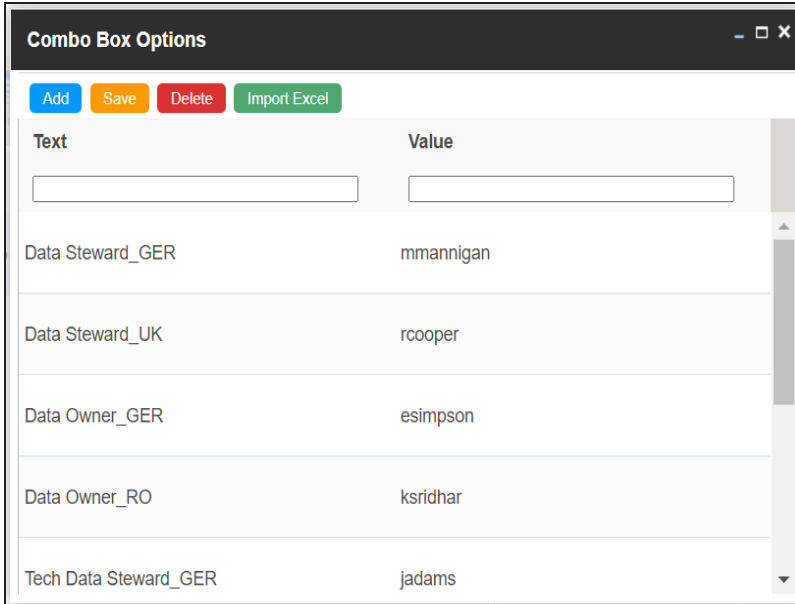

Text	Value
Data Steward_GER	mmannigan
Data Steward_UK	rcooper
Data Owner_GER	esimpson
Data Owner_RO	ksridhar
Tech Data Steward_GER	jadams

6. Click **Save**.

The option values appear in the UI element under the Configure Form section.

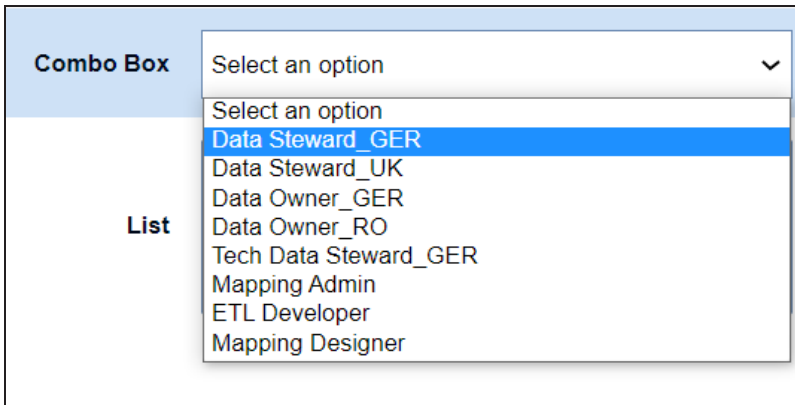

Combo Box

Select an option

Select an option

Data Steward_GER

Data Steward_UK

Data Owner_GER

Data Owner_RO

Tech Data Steward_GER

Mapping Admin

ETL Developer

Mapping Designer

Reference Data Manager

When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the Reference Data Manager connector to import option values from tables in the Reference Data Manager.


To configure option values using reference data manager connector, follow these steps:

1. In the **Configure Form** section, click the required UI element.

Ensure that you are in edit mode.


2. In the **Properties** section, click **Configure**.

The Connectors page appears.

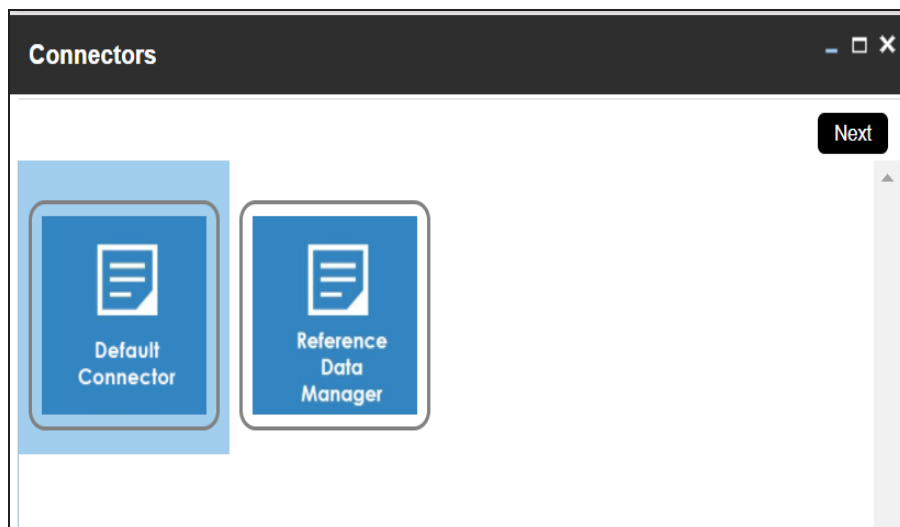


3. On the **Connectors** page, click **Reference Data Manager** and then click **Next**.

The Reference Data Manager page appears. It displays the reference folders in the Connector View pane.

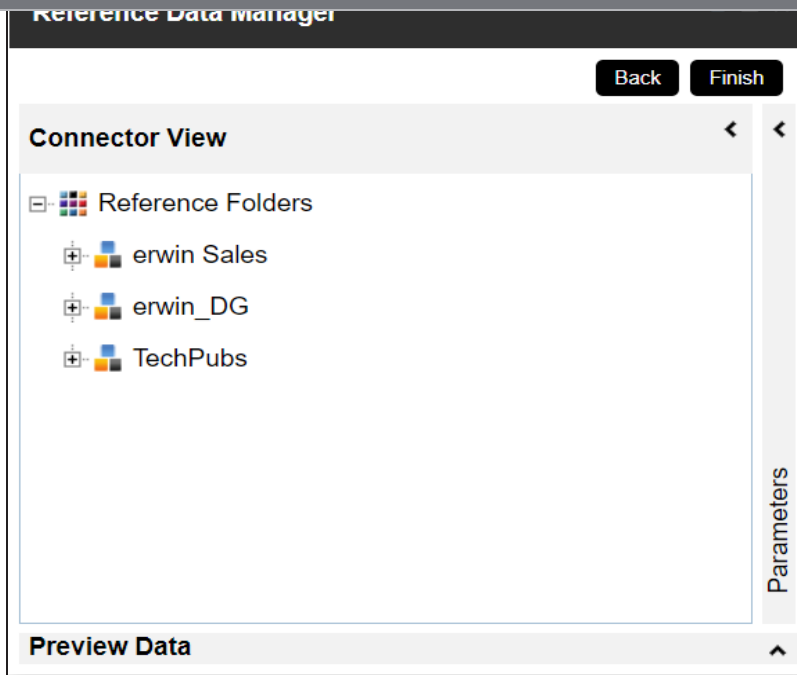

4. In the **Connector View** pane, expand a reference folder and select a reference table. The Parameters pane displays the columns in the reference table. You can also click Preview to view the data in the reference table.

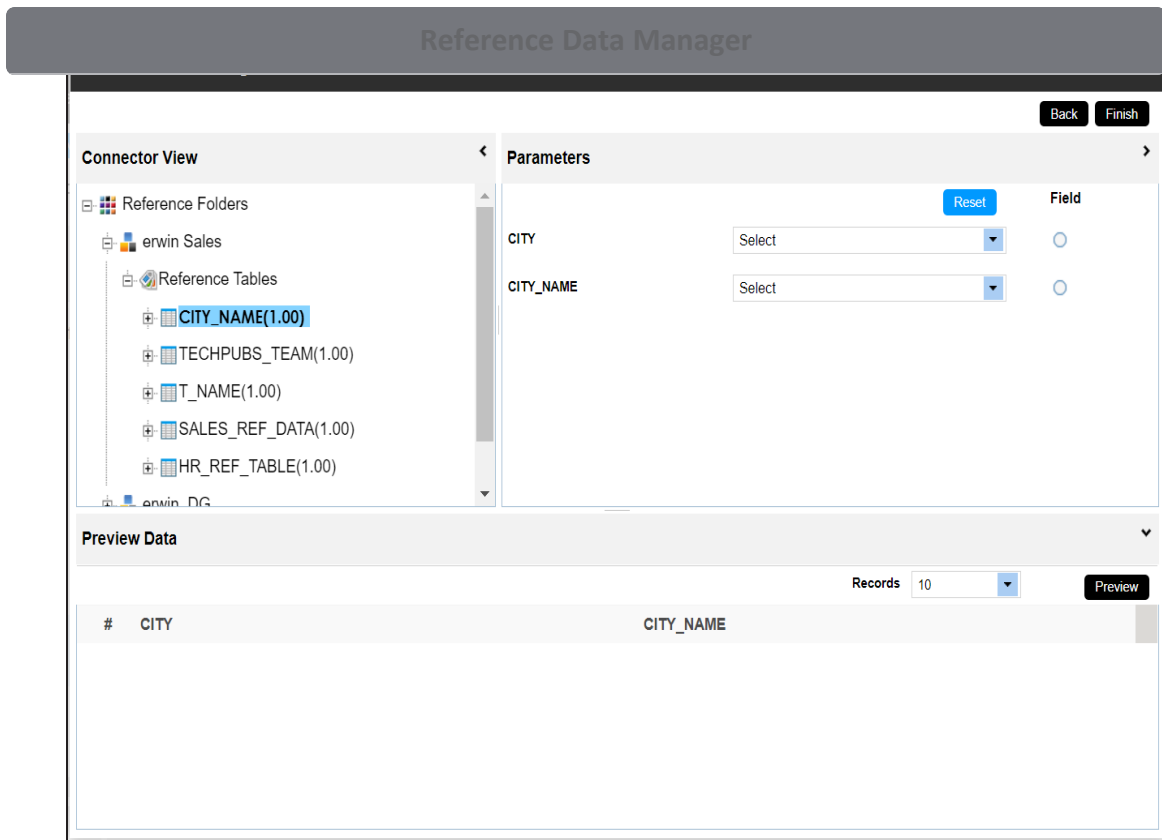

5. In the **Parameters** pane, click the radio button next to the required column.

You can select the controlling field from the drop down option. Ensure that you define the required dependencies in the Properties pane and that the option values for controlling field are configured using the same reference column.

6. Click **Finish**.

The Extended Properties Configuration page appears.

Reference Data Manager

The screenshot shows the Reference Data Manager interface. At the top, there are buttons for Save, Cancel, and Delete. Below this is the 'Field Controls' section with various field types: Group, Text Box, Combo Box, List, Radio, Check Box, Number, Boolean, Date Picker, and Category. The 'Configure Form' section is active, showing a 'Selected Roles Group' dropdown with 'Compliance Officer' selected. Below it is a 'List of Cities' dropdown with options: Mumbai, Los Angeles (highlighted), and New Delhi. At the bottom of the 'Configure Form' section is a 'Radio' button. To the right is the 'Properties' section with a table:

Property	Value
Description	
Load On Startup	☐ Off
Visible in Extended Properties	☒ On

7. Under the **Properties** section, switch **Load on Startup** to **ON**.
8. Click **Save**.

The option values are configured. For example, in the following form the List of Cities is the controlling field for Selected City. Both the fields get their option values from the same reference column.

The screenshot shows the 'Configure Form' interface. It has a 'Governance Responsibilities' section with a dropdown showing 'Compliance Officer'. Below this is a 'Selected Roles Group' dropdown also showing 'Compliance Officer'. Underneath is a 'List of Cities' dropdown with options: Mumbai, Los Angeles (highlighted), and New Delhi. At the bottom is a 'Selected City' section with a radio button and the text 'Los Angeles'.

Importing from Excel

You can import user-defined project properties from an XLSX file. You can either use an existing XLSX file or download an extended properties file from a project. Ensure that the XLSX file follows the correct template.

To import extended properties from XLSX files, follow these steps:

1. On the **Extended Properties** tab, click **Import From Excel**.

The Upload Excel page appears.

2. Click **Choose File**.
3. Browse and select the XLSX file.
4. Click .

The Upload Excel page appears. It displays the data in the XLSX file.

Upload Excel						
#	FIELD	VALUE	TYPE	PARENTFIELD	CREATED_BY	CREATED_DATE_TIME
#	Select Column To Import	Select Column To Import	Select Column To Import	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards		Combo Box			
2	Data Steward_UK	Data Steward_UK	Text Box	/Data Stewards	Administrator	10/20/2020 06:42:38
3	Data Steward_GER	Data Steward_GER	Text Box	/Data Stewards		
4	Data Owners	Data Owner_GER	Text Box		Administrator	10/20/2020 06:42:38

5. Double-click the **Select Column To Import** cell in the required column.

The available options appear.

Importing from Excel

#	FIELD	VALUE	TYPE	PARENTFIELD
#	Select Column To Import FIELD VALUE TYPE PARENTFIELD Clear Selection	Select Column To Import	Select Column To Import	Select Column To Import
1			Combo Box	
2	Data Steward_UK	Data Steward_UK	Text Box	/Data Stewards
3	Data Steward_GER	Data Steward_GER	Text Box	/Data Stewards

6. Select an appropriate option.

For example, if you select Field, then the selected column is imported as Field.

Similarly, you can also select the Value, Type, and Parentfield columns. Ensure that you at least select a Field column.

7. Click .

The extended properties are imported.

Configure
Edit
Delete
Import From Excel
Export To Excel

Form Values

Data Stewards

Select an option

Data Owners

Data Owner_GER

Technical Data Steward

Tech Data Steward_GER

Compliance Officer

Mapping Designer

Self Help

Adding Tasks

To improve productivity and collaboration, you can create tasks related to mapping projects. These tasks may be to-do tasks, access requests, or issues. With My Action Center Settings, you can manage task types.

To add tasks, follow these steps:

1. In the **Workspace Mappings** pane, click a project.

The Mapping Summary page appears.


The screenshot shows the 'Mapping Summary' page for the 'erwinDIS' project. The left sidebar lists various workspace mappings, with 'erwinDIS (8)' selected. The main area displays a table of mapping details.

#	Project Name	Subject Hierarchy	Map Name	Lock Status	Locked By	Locked Date	Workflow Status	Mapping State	Mapping Description
1	erwinDIS		bb	Locked			Preliminary Draft	In Progress	
2	erwinDIS		BugTrial	Locked	Administrator	09/15/2020 08:48:48	Preliminary Draft	Approved	Testing for a bug logged by QA
3	erwinDIS		Data Integration	Locked	Administrator	07/13/2021 03:23:42	Preliminary Draft	Approved	
4	erwinDIS		Demo	Locked			Preliminary Draft	In Progress	
5	erwinDIS		erwinSalesIntegration	Locked			Preliminary Draft	Approved	

2. Click the **My Action Center** tab.


The My Action Center tab opens. It displays a list of all tasks related to the project.

Adding Tasks

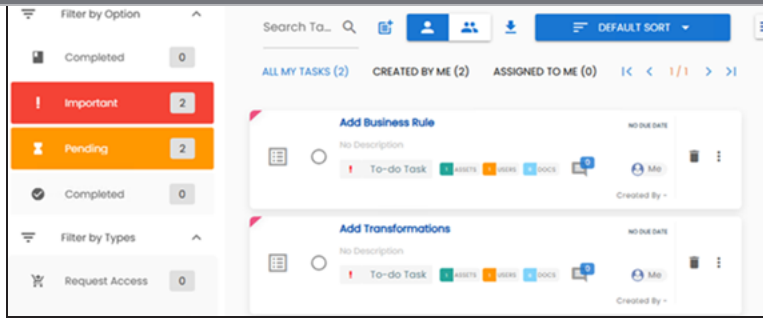

3. Click .

A list of task types appears. You can add or delete a task type from this list using [Action Center Settings](#).

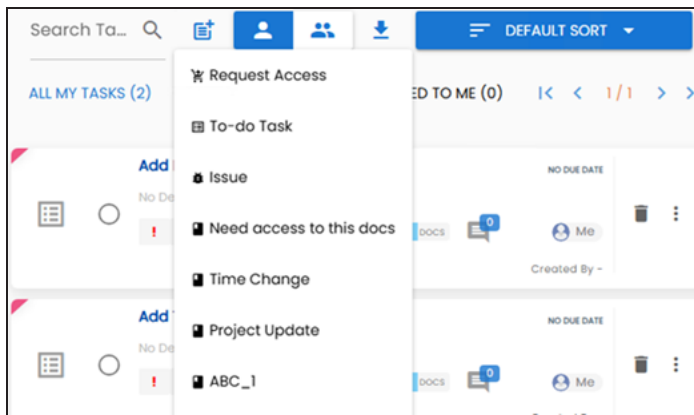

4. Click the required task type.

The Create New Task page appears.

Adding Tasks

Create New Task

TASK DETAILS

Task is being created on Asset

erwinDIS
PROJECT

With Task Type as

To-do Task

Name

PROJECT_erwinDIS_

17 / 200

Description

0 / 8

Important

YES NO

Due

Assign Users

Richard Cooper

External user emails

Hit the ENTER key to add a new Email

- Enter appropriate values in the fields. Refer to the following table for field descriptions.

Field Name	Description
Task is being created on Asset	Specifies the asset for which the task is created. This field autopopulates with the project name.
With Task Type as	Specifies the task type. For example, To do Task.

Adding Tasks

Field Name	Description
Name	Specifies the name of the task. By default, it autopopulates with a name in the following format: Project_<Project_Name>. You can edit it and rename the task. For example, Test Mappings.
Description	Specifies a description of a task. For example: Test all the mappings and record the effort required.
Important	Specifies whether the task is important
Due	Specifies the due date of the task. Use  to set the due date.
Assign Users	Specifies the users assigned to the task. You can assign DI and BU users from the list. For example, Richard Cooper.
External user emails	Specifies the email ID of external users. For example, chris.harris@quest.com

6. Click .

The task is created and saved. Use  to edit the task details and attach relevant documents.

Chat

Use the Chat tab to send messages to the assigned and external users of a task.

On the **Chat** tab, enter your message in the text box and use the following options:


Assigned

Use this option to send messages to the assigned users.

External Users

Use this option to send messages to external users.

Users are notified via Messaging Center.

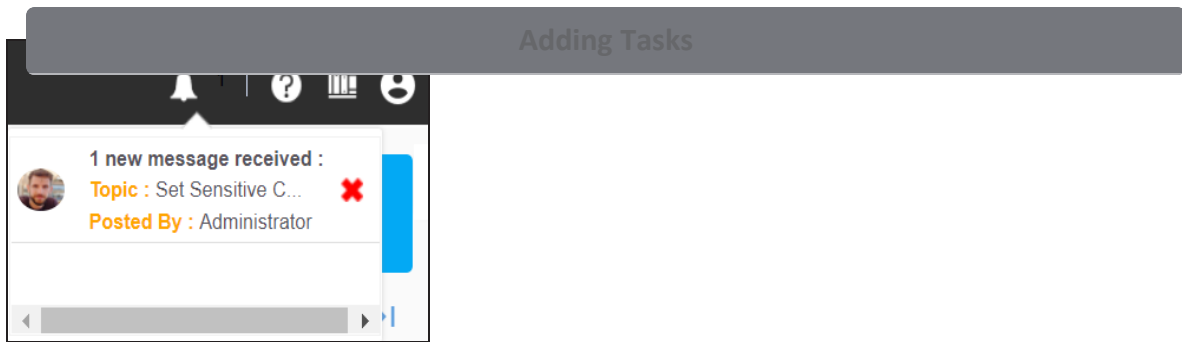

You can manage a task using the options available on the task list. [Managing a task](#) involves:

- Marking tasks complete
- Viewing task details
- Editing task details
- Disabling notifications
- Downloading Chat
- Sharing chat
- Marking tasks as pending
- Deleting tasks

With the My Action Center tab, you can filter and search tasks based on its status and assignments. For more information on search and filter mechanisms, refer to the [Filter and Search](#) topic.


Configuring Task Types

You can configure task types to categorize tasks. By default, three task types, To-Do Task, Request Access, and Issue, are available. You cannot edit or delete these task types. Additionally, you can create custom task types depending on your requirements.

To add custom task types, follow these steps:

1. In the utility section, click .

The Task Type Configuration pane appears and displays a list of available task types.

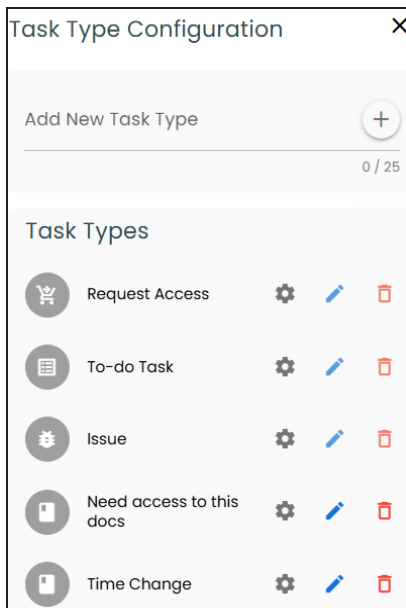


2. In the Add New Task Type box, enter a new task type and then click .

The task type is added to the list of available tasks.

For example, in the following image, a task type, Schedule Job is added.

Configuring Task Types

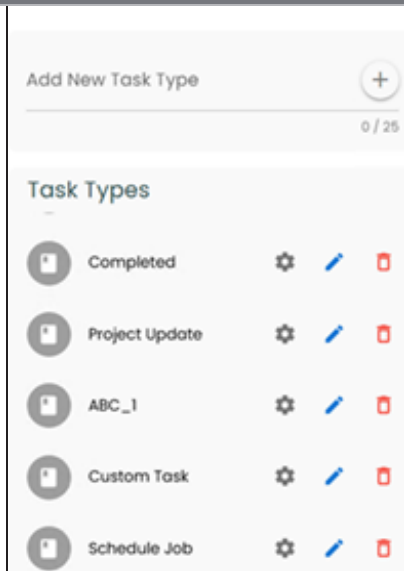

Use the following options to manage task types:

Configure Task Type ()

Use this option to [configure task types](#).

Edit ()

Use this option to edit task types.

Delete ()


Use this option to delete task types.

To configure task types, follow these steps:

1. Click .

The Task Type Configuration page appears. By default, the Extended Properties tab opens.

Configuring Task Types

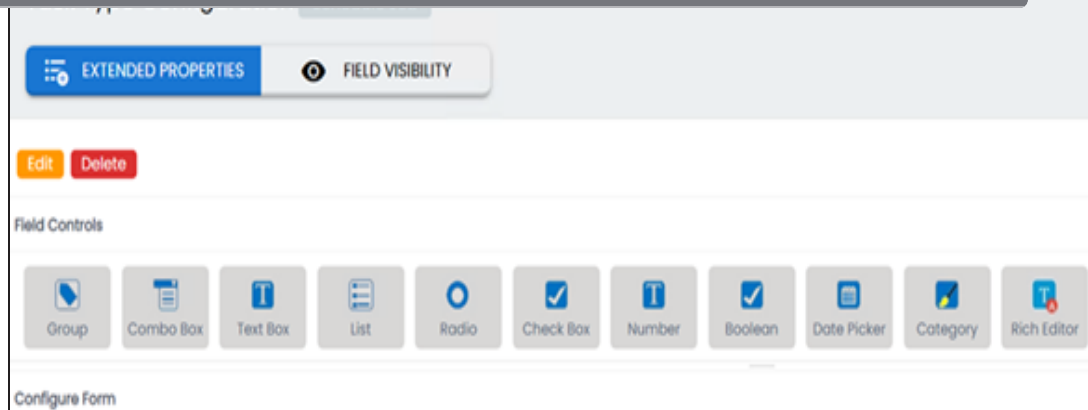

The Extended Properties tab contains the following sections:

- **Field Controls:** This pane displays the available UI elements.
- **Configure Form:** Use this pane to design forms using the UI elements available in the Field Controls pane.
- **Configure Form:** Use this pane to view and edit the properties of the UI element selected in the Configure Form pane.

2. Click **Edit**.
3. Double-click or drag and drop the required UI elements from the Field Controls pane to the Configure Form pane.
4. Select the required UI element one at a time and edit their properties in the Properties pane.

Configuring Task Types

EXTENDED PROPERTIES

FIELD VISIBILITY

Save

Cancel

Delete

Field Controls

Group

Combo Box

Text Box

List

Radio

Check Box

Number

Boolean

Date Picker

Category

Rich Editor

Configure Form

List

Configure Form

Property	Value
Published	ON
Field	List
Type	List
Dependencies	Type or click here
Configure Values	Configure
Mandatory	OFF
Description	

Note: Double click on the field cell to update the field name

 The available properties differ based on the type of UI element.

Refer to the following table for property descriptions:

Property	Description
Published	Switch the Published option to ON to publish the field.
Field	Specifies the field label. To change the field labels, double-click the corresponding Value cell. For example, List.
Type	Specifies the type of the field. To select field types, double-click the corresponding Value cell. For example, List.
Dependencies	Defines the pick list fields that can be used as controlling fields. It

Configuring Task Types	
Property	Description
	works only with the Reference Data Manager connector. To define pick list fields, select the fields from the drop down list.
Configure Values	Specifies the connectors for the field. To enter option values, click Configure . Use the following options: ▪ Default Connector: Use this option to enter option values manually or using an MS Excel file. ▪ Reference Data Manager: Use this option to pull option values from reference tables in the Reference Data Manager.
Mandatory	Specifies whether the field is mandatory. Switch the Mandatory option to ON to make this field mandatory in a form.
Description	Specifies the field description. To enter field descriptions, double-click the corresponding Value cell.
Order	Specifies the order of the field on the Extended Properties tab. To enter the order number, double-click the corresponding Value cell. You can also drag and move fields in the Configure Form pane to change their order.

3. Click **Save**.

The form is saved and available on the Extended Properties tab.

To configure field visibility, follow these steps:

1. Click the **Field Visibility** tab. It displays the default fields available for the task type.

Configuring Task Types

The screenshot shows a configuration window titled 'Configuring Task Types'. It has two tabs: 'EXTENDED PROPERTIES' and 'FIELD VISIBILITY'. The 'FIELD VISIBILITY' tab is active. Below the tabs is an orange 'EDIT' button. A list of fields is displayed, each with a toggle switch to its right. The fields and their toggle states are: Description (on), Assign Users (on), Requestor (on), External user emails (on), Comments (on), Attachments & URLs (on), Type (on), and Important (on).

Field	Visibility
Description	On
Assign Users	On
Requestor	On
External user emails	On
Comments	On
Attachments & URLs	On
Type	On
Important	On

2. Click **Edit**.
3. To make fields visible, switch on the required fields.
4. Click **Save**.

The fields are configured.

Default Connector


When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the default connector to import option values from an MS Excel file or enter them manually.

To configure option values using the default connector, follow these steps:

Ensure that you are in edit mode.


2. In the **Properties** section, click **Configure**.

The Connectors page appears.

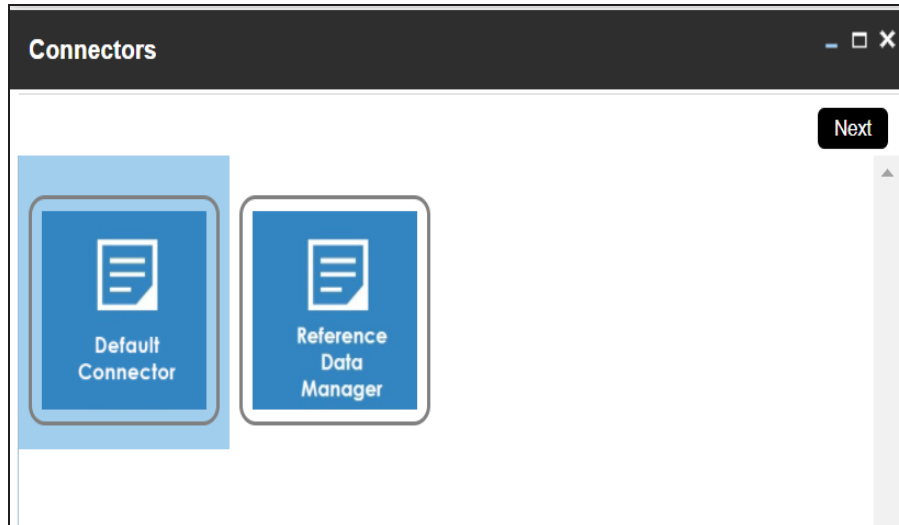

3. On the **Connectors** page, ensure that the Default Connector option is selected. Then, click **Next**.

The <UI_Element> Options page appears. For example, if the UI element is Combo Box, the Combo Box Options page appears.

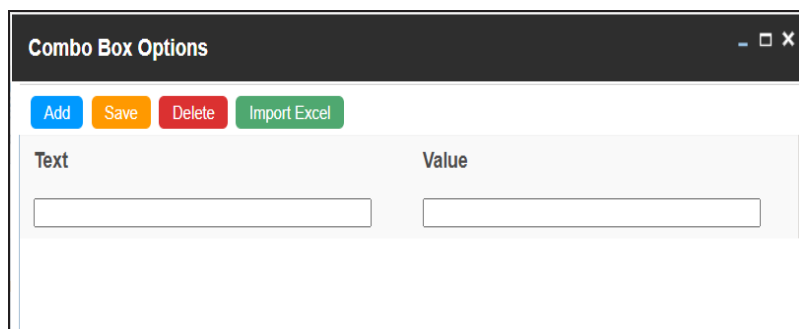

Add

Use this option to enter text and value manually.

Import Excel

Use this option to import options from MS Excel files.

5. After configuring option values, click **Save**.

To add option values manually, follow these steps:


1. Click **Add**.
2. Enter values in the Text and Value fields.

The Text corresponds to options whereas the Value corresponds to underlying value of an option. You can add as many values as needed.

Text	Value
Data Steward_GER	rcooper
Data Steward_ROM	vsmith

3. Click **Save**.

Configuring Task Types

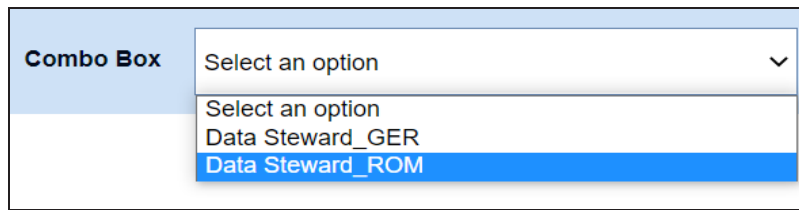


A screenshot of a web interface showing a 'Combo Box' with a dropdown menu. The dropdown menu is open, displaying four options: 'Select an option' (twice), 'Data Steward_GER', and 'Data Steward_ROM'. The 'Data Steward_ROM' option is highlighted in blue.

To import option values from MS Excel files, follow these steps:

1. Click **Import Excel**.

The Upload Excel page appears.

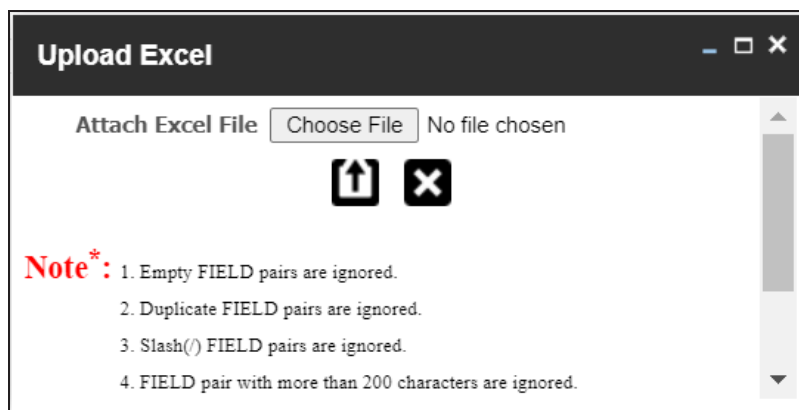

A screenshot of the 'Upload Excel' page. The page has a dark header with the title 'Upload Excel' and window control buttons. Below the header, there is a section 'Attach Excel File' with a 'Choose File' button and the text 'No file chosen'. Below this, there are two icons: an upward arrow and a cross. A red 'Note*' is followed by a list of four items: '1. Empty FIELD pairs are ignored.', '2. Duplicate FIELD pairs are ignored.', '3. Slash(/) FIELD pairs are ignored.', and '4. FIELD pair with more than 200 characters are ignored.'

2. Click **Choose File** and select the required MS Excel file.

The Upload Excel page appears. It displays the data in the MS Excel file.

Configuring Task Types

#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards	Data Steward_GER	mmanigan
2	Data Stewards	Data Steward_GER	mmenza
3	Data Stewards	Data Steward_GER	mmanigan

- Double-click the **Select Column To Import** cell in the required column.

The available options appear.

#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import FIELD VALUE Clear Selection	Select Column To Import
1	Data Stewards	Data Steward_GER	mmanigan


- Select the appropriate option.

Field corresponds to options and Value corresponds to value of an option. You can import multiple columns. Use Clear Selection to undo the selection.

- Click .

The <UI_Element> Options page appears. It displays the imported columns. You can delete a row that is not required. To delete rows, click a row and then click **Delete**.


Configuring Task Types

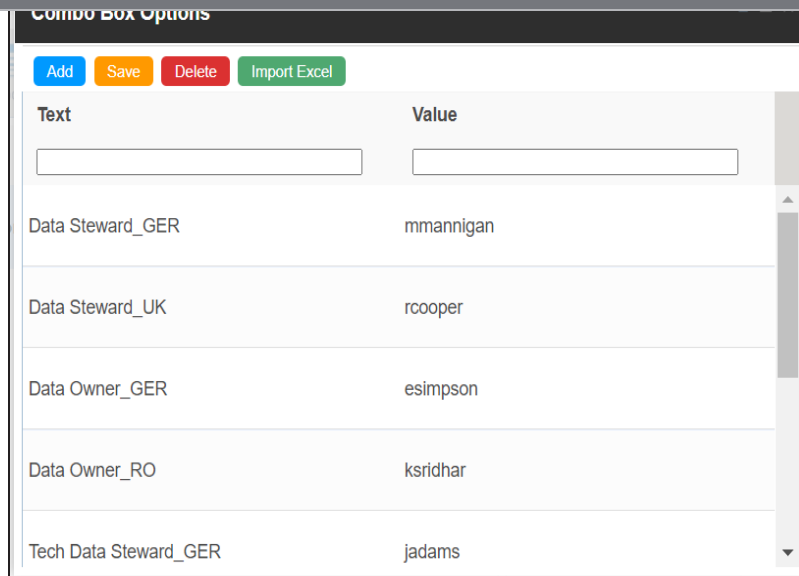

Text	Value
Data Steward_GER	mmannigan
Data Steward_UK	rcooper
Data Owner_GER	esimpson
Data Owner_RO	ksridhar
Tech Data Steward_GER	jadams

6. Click **Save**.

The option values appear in the UI element under the Configure Form section.

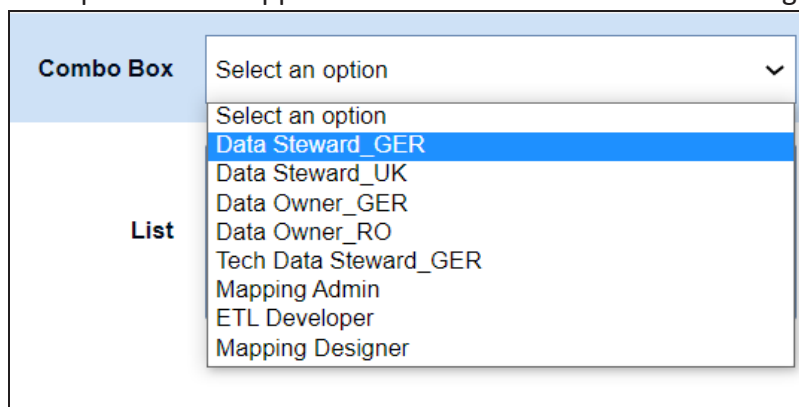

Combo Box

Select an option ▼

List

- Select an option
- Data Steward_GER
- Data Steward_UK
- Data Owner_GER
- Data Owner_RO
- Tech Data Steward_GER
- Mapping Admin
- ETL Developer
- Mapping Designer

Reference Data Manager

When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the Reference Data Manager connector to import option values from tables in the Reference Data Manager.


steps:

1. In the **Configure Form** section, click the required UI element.

Ensure that you are in edit mode.


2. In the **Properties** section, click **Configure**.

The Connectors page appears.

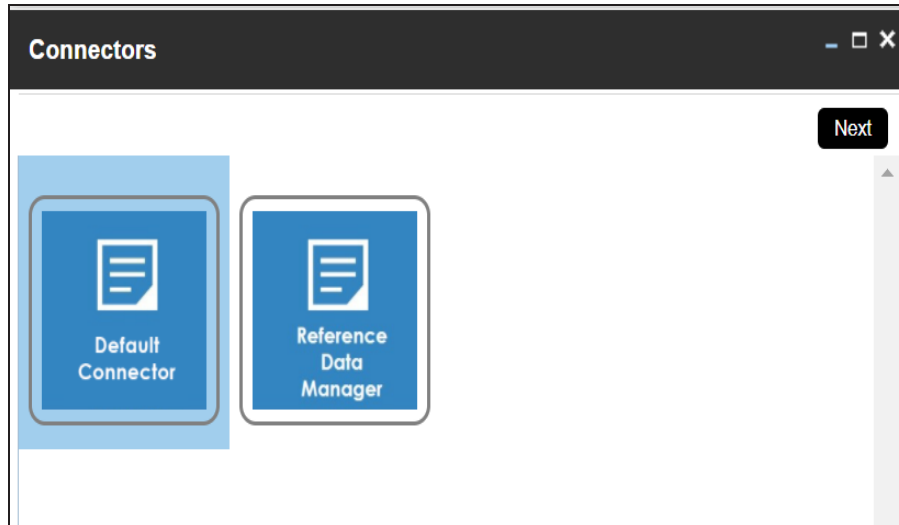


3. On the **Connectors** page, click **Reference Data Manager** and then click **Next**.

The Reference Data Manager page appears. It displays the reference folders in the Connector View pane.

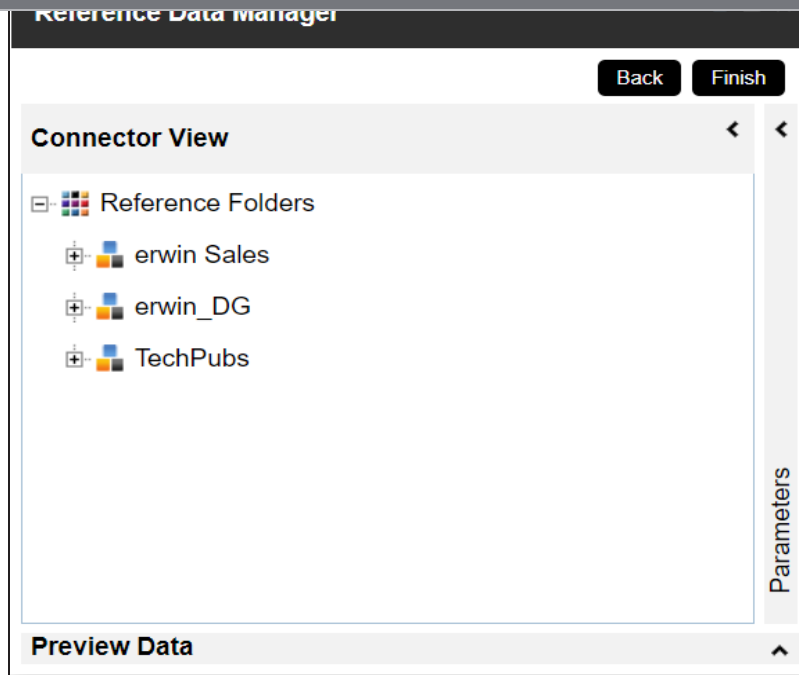

4. In the **Connector View** pane, expand a reference folder and select a reference table.

The Parameters pane displays the columns in the reference table. You can also click Preview to view the data in the reference table.

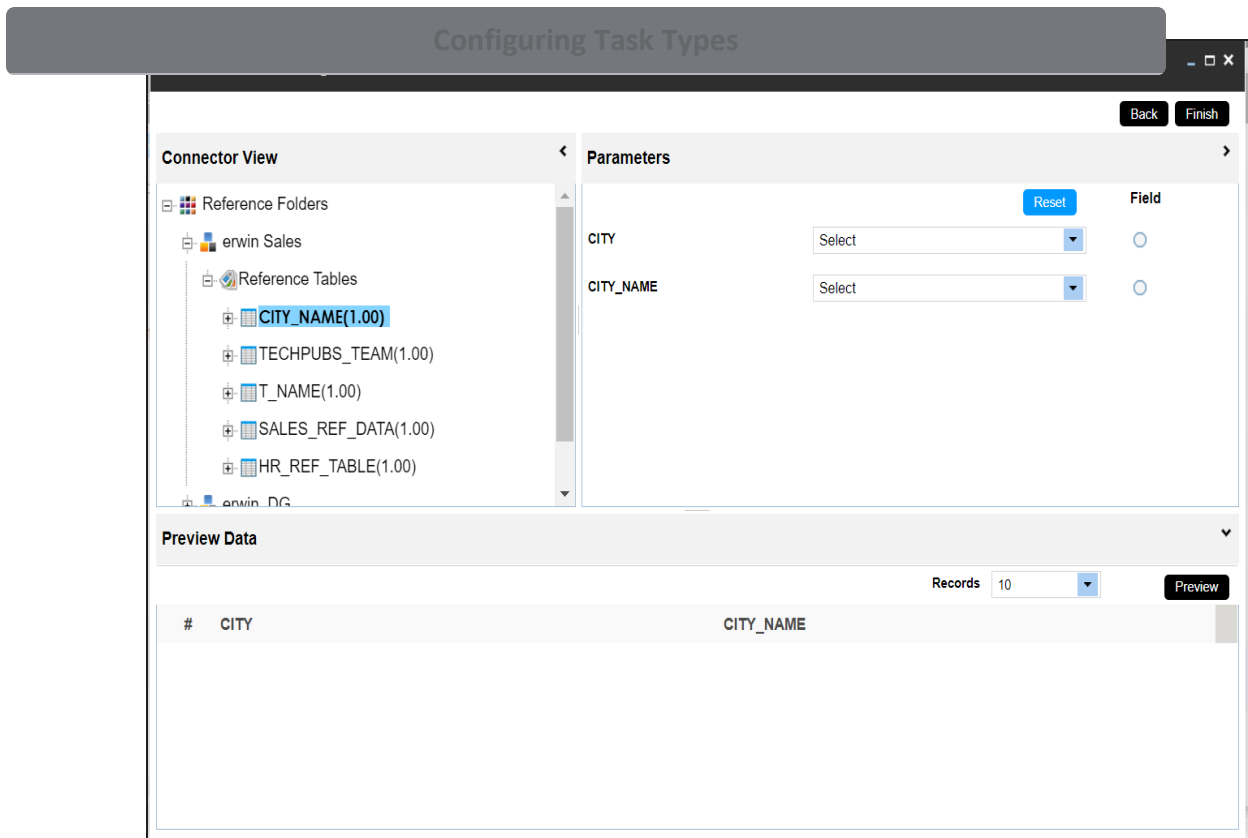

5. In the **Parameters** pane, click the radio button next to the required column.
You can select the controlling field from the drop down option. Ensure that you define the required dependencies in the Properties pane and that the option values for controlling field are configured using the same reference column.
6. Click **Finish**.
The Extended Properties Configuration page appears.

Configuring Task Types

The screenshot shows the 'Configuring Task Types' interface. At the top, there are 'Save', 'Cancel', and 'Delete' buttons. Below them is the 'Field Controls' section with icons for Group, Text Box, Combo Box, List, Radio, Check Box, Number, Boolean, Date Picker, and Category. The 'Configure Form' section contains a 'Selected Roles Group' dropdown with 'Compliance Officer' selected, a 'List of Cities' dropdown with 'Los Angeles' selected, and a 'Radio' button. The 'Properties' section has a table with 'Property' and 'Value' columns. The 'Load On Startup' property is set to 'Off' and the 'Visible in Extended Properties' property is set to 'On'.

Property	Value
Description	
Load On Startup	Off
Visible in Extended Properties	On

7. Under the **Properties** section, switch **Load on Startup** to **ON**.
8. Click **Save**.

The option values are configured. For example, in the following form the List of Cities is the controlling field for Selected City. Both the fields get their option values from the same reference column.

The screenshot shows the 'Configure Form' interface. It contains a 'Governance Responsibilities' section with a dropdown for 'Compliance Officer'. Below it is a 'Selected Roles Group' section with a dropdown for 'Compliance Officer'. There is a 'List of Cities' dropdown with 'Los Angeles' selected. At the bottom, there is a 'Selected City' section with a radio button for 'Los Angeles'.

Managing Tasks


Managing tasks involves:

- Marking tasks complete
- Viewing task details
- Editing task details
- Disabling notifications
- Downloading Chat
- Sharing chat
- Marking tasks as pending
- Deleting tasks

To mark tasks complete, on the task list, for the required task, click the radio button.

The task is moved to the list of completed task.

For example, in the following image, the task, Add Business rule is marked complete.

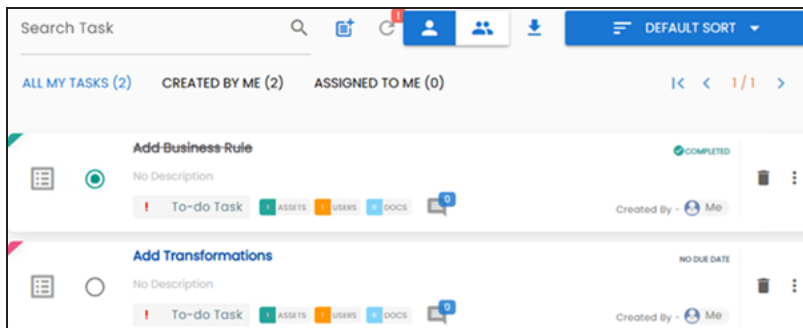


To manage tasks, follow these steps:

1. In the task list, for the required task, click ⋮.

The available options appear.

Managing Tasks

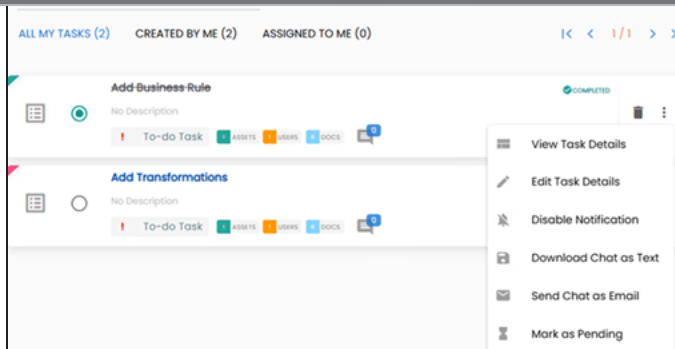

2. Use the following options to work on tasks:

View Task Details

Use this option to view task details. These details include task name, description, assigned assets, attached documents, and so on.

Edit Task Details

Use this option to update task details.

Disable Notification

Use this option to stop receiving notifications related to a task. By default, notifications are enabled, and users assigned to task receive notifications.

Download Chat as Text

Use this option to download chat related to a task in the TXT format.

Send Chat as Email

Use this option to share the chat related to a task via an email. Click **Send Chat as Email**.

The Email Selection page appears. It displays a list of users assigned to the task.

Managing Tasks

☐	Select All	
	Administrator	☐
	rcooper	☐
	lmichal	☐

Select the required users, and then click . An email is sent to the selected users.

Mark as Pending

This option is available for a completed task. Use this option to mark a task as pending.

To delete a task, in the task list, for the required task, click .



You can delete a task only if you have created the task.


Creating Subject Areas

Subject areas provide one more level of grouping for mapping specifications. You can create a subject area within a project or within another subject area. Ensure that the subject area names are unique under each project.

Subject Areas

To create subject areas, follow these steps:

1. In the **Workspace Mappings** pane, right-click a project.

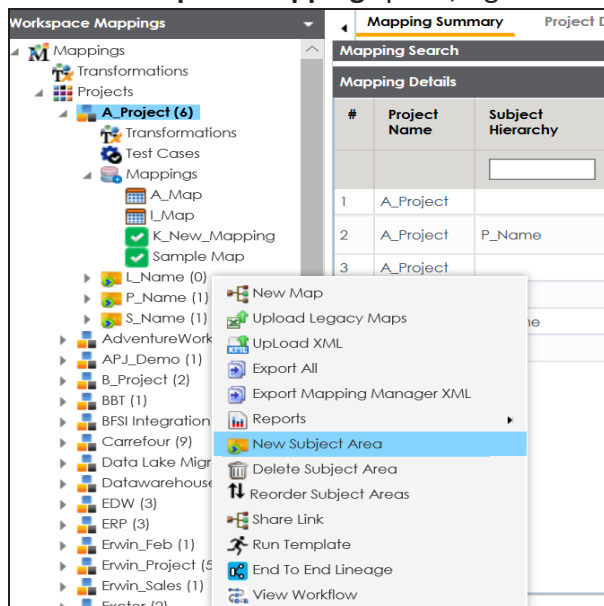

2. Click **New Subject Area**.

The Add Subject page appears.

Creating Subject Areas

Subject Name*

Subject Description

Additional Fields

User Field 1

User Field 2

3. Enter the **Subject Name** and **Subject Description**.



The Subject Name field supports # (hash), . (full stop), , (comma), @ (at sign), [] (left and right square brackets), ! (exclamation mark), + (plus), % (percentage), ; (semicolon), = (equals sign), ^ (circumflex accent), and {} (left and right curly brackets) as special characters.

For example:

- **Subject Name:** Members.
- **Subject Description:** This subject area is created to arrange the mappings logically.

You can use additional fields and define UI labels in [Language Settings](#).


4. Click .

The subject area is saved and added to the project.

Nested Subject Areas

You can create subject areas within another subject area. These subject areas are called nested subject areas.

1. In the **Workspace Mappings** pane, right-click a subject area.

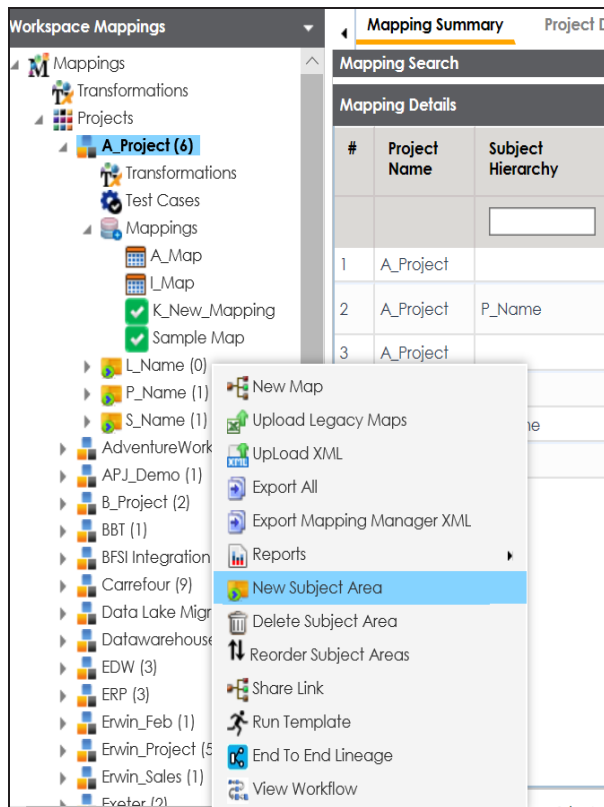

2. Click **New Subject Area**.

The Add Subject page appears.

Creating Subject Areas

Subject Name*

Subject Description 

Additional Fields

User Field 1 

User Field 2 

3. Enter the **Subject Name** and **Subject Description**.

You can use additional fields and define UI labels in [Language Settings](#).

4. Click .

A subject area is created under the subject area.

Once a subject area is created, you can enrich it further by [Tagging Subjects](#).


Managing Subject Areas

Managing subject areas involves:

- Deleting
- Reordering

To manage subject areas, follow these steps:

1. In the **Workspace Mappings** pane, right-click a subject area.

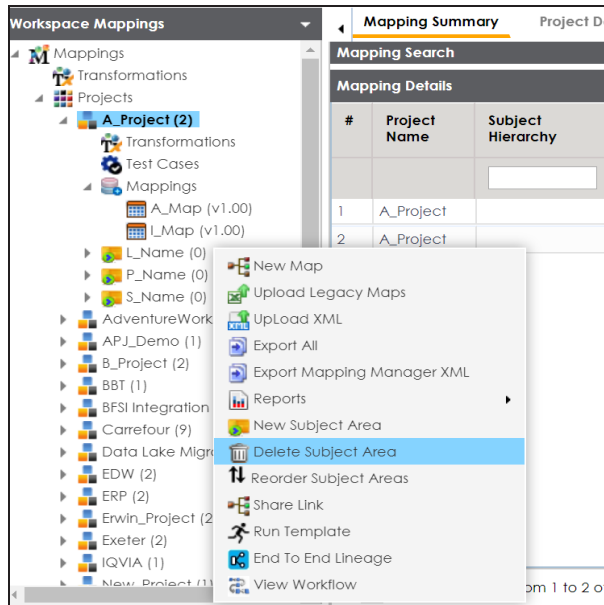

2. Use the following options:

Delete Subject Area

Use this option to delete subject areas that are not required.

Reorder Subject Areas

Use this option to reorder subject areas. To reorder subject areas, click **Reorder Subject Areas**.

The Subject for <Project_Name> page appears.

Managing Subject Areas

#	Subject Name	Current Order	New Order	Parent Hierarchy	Created By	Created Date	Modified By	Modified Date
1	L_Name[0]	1	1	A_Project	Administrator	2019-10-30 11:45:11.917	Administrator	2019-10-30 11:45:11.917
2	P_Name[0]	2	2	A_Project	Administrator	2019-10-30 11:44:51.983	Administrator	2019-10-30 11:44:51.983
3	S_Name[0]	3	3	A_Project	Administrator	2019-10-30 11:35:42.867	Administrator	2019-10-30 11:35:42.867

To order subject areas, from the **Order By** list, select one of the following options:

- **Ascending Order:** Select this option to order in ascending alphabetical order.
- **Descending Order:** Select this option to order in descending alphabetical order.
- **Custom Order:** Select this option to order in custom order.

To sort subject areas, from the **Sort Subjects By** list, select one of the following options:

- **Subject Name:** Select this option to sort by subject name.
- **Created By:** Select this option to sort by the users who created subject areas.
- **Created Date:** Select this option to sort by created date.
- **Modified By:** Select this option to sort by the users who modified subject areas.
- **Modified Date:** Select this to sort by the modified date.

Managing Projects


Managing projects involves:

- Uploading legacy maps
- Export mappings
- Export change logs
- Viewing reports
- Sharing links
- Deleting projects
- Viewing workflows

To manage projects follow these steps:

1. In the **Workspace Mappings** pane, right-click a project.

The available options appear.

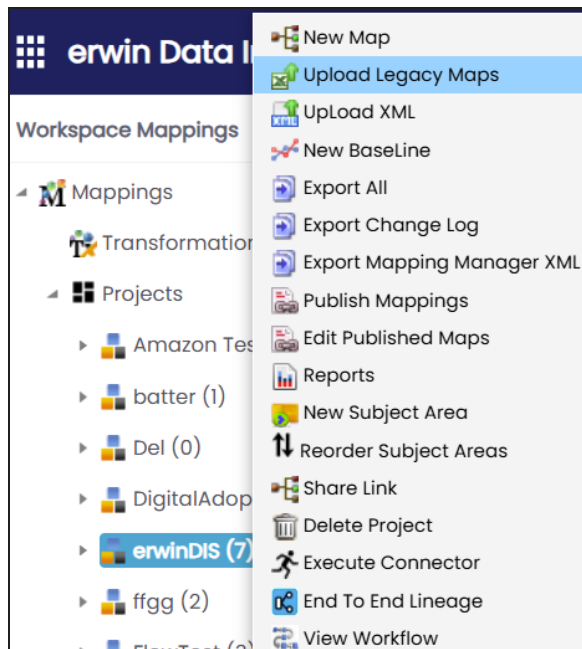

Upload Legacy Maps

Use this option to upload maps in the XLSX format. Ensure that you use the required template.

Export All

Use this option to download the required maps in a project.

Export Change Log

Use this option to download change logs of all the maps in a project.

Reports

Use this option to download various reports related to a project.

Share Link

Use this option to share link of a project with your team members.

Delete Project

Use this option to delete a project.

View Workflow

Use this option to view workflow status of a project.

Defining Transformations

Transformations specify rules that derive values from source columns to get the required values in target columns. You can define enterprise-level and project-level transformations. These transformations can be used as business rules and extended business rule transformations in mapping specifications. Ensure that you define transformations for the same ETL option as that of your mapping project.

To define transformations, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click any one of the following:
 - **Transformations node**: Click this option to define enterprise-level transformations.
 - **Transformations node under a project**: Click this option to define project-level transformations.

For example, if you click the Transformations node, then the Transformation Details page appears.

Workspace Mappings

Mappings

Transformations

Projects

A_Project (0)

AdventureWorks_Migration (8)

APJ_Demo (1)

BBT (1)

BFSI Integration (1)

Carrefour (9)

Data Lake Migration (3)

EDW (2)

ERP (2)

Transformation Details

#	Transformation Name	SSIS Pseudocode	Informatica Pseudocode
1	1-DataGov(HighDate:12/31/9999)		To_date(mm/dd/yyyy,12/31/9999)
2	2-DataGov(LowDate01/01/0001)		To_date(mm/dd/yyyy, 01/01/0001)
3	3-DataGov(AverageChurn)		Count(active customers)/(Count o Cancelled Customers for current month)

3. Click

The Transformation Rule Editor page appears.

Defining Transformations

Published

OFF

Transformation Name*

Scope

All Projects

ETL Option

SSIS Pseudocode

ON

Replace Transformation Name with Pseudocode

Pseudocode

1

Note: Press 'Ctrl + Space' to select Transformations

Intended Use

4. Enter or select appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Published	Switch Published on () to publish the transformation.
Transformation Name	Specifies a unique name of the transformation. For example, ASCII.
Scope	Specifies the projects to which the transformation can be applied. For example, All Projects.
ETL Option	Specifies the ETL option.

Mapping Management Guide 15.0

72

Defining Transformations	
Field Name	Description
	For example, Informatica Pseudocode. You can configure ETL option list and add or remove an ETL option from the list.
Replace Transformation Name with Pseudocode	Switch Replace Transformation Name with Pseudocode on () to replace the transformation name with pseudocode.
Pseudocode	Specifies the pseudocode for the transformation. Enter a pseudocode or use Ctrl + Space keys to select a pseudocode. For example, To_date(mm/dd/yyyy,1231,9999).
Intended Use	Specifies the objective of the transformation. For example: Data governance rule - use on projects.

5. Click .

A new transformation is added on the Transformations Details page.

You can upload transformations in bulk [using an MS Excel file](#).

Once a transformation is defined, you can manage it using the options available on right-clicking the transformation. [Managing Transformations](#) involves:

- Editing transformations
- Running impact analysis
- Viewing history

Configuring Transformation Library

You can create transformations for the following ETL options:

- DataStage Pseudocode
- BODS Pseudocode
- SSIS Pseudocode
- Informatica Pseudocode
- ODI Pseudocode
- Talend Pseudocode

This ETL options list forms the Transformation Library and is configurable. You can add or remove an ETL option from the ETL options list.

To configure transformation library, follow these steps:

1. In the **Workspace Mappings** pane, click the **Transformations** node.

The Transformation Details page appears.

Transformation Details						
#	Transformation Name	BODS Pseudocode	SSIS Pseudocode	Informatica Pseudocode	ODI Pseudocode	Talend Pseudocode
1	1-DataGov(HighDate:12/31/9999)			To_date(mm/dd/yyyy,12/31/9999)		
2	2-DataGov(LowDate:01/01/0001)			To_date(mm/dd/yyyy,01/01/0001)		
3	3-DataGov(AverageChurn)			Count(active customers)/(Count of Cancelled Customers for current month)		

2. Click .

The ETL Settings page appears.

ETL Settings

Select ETL to add to Transformation Library

☐ OFF	DataStage Pseudocode
☐ OFF	BODS Pseudocode
☒ ON	Talend Pseudocode
☒ ON	ODI Pseudocode
☒ ON	SSIS Pseudocode
☒ ON	Informatica Pseudocode

Note: Selecting an ETL tool will add the ability to define pseudocode specific to the ETL tool in the global transformation library

- Switch an **<ETL_Option>** key to **ON** to add the corresponding ETL option to the Transformation Library.

For example, switch **BODS Pseudocode** to **ON** to add BODS Pseudocode to the Transformation Library.

- Click **Save**.

ETL options are added to the ETL Option list.

Configuring Transformation Library



Published ☐ OFF

Transformation Name*

Scope All Projects

ETL Option BODS Pseudocode

Pseudocode

- BODS Pseudocode
- SSIS Pseudocode
- Informatica Pseudocode
- ODI Pseudocode
- Talend Pseudocode

Note: Press 'Ctrl + Space' to select Transformations

Intended Use

Uploading Transformations

You can upload transformations in bulk using an MS Excel file. You can either use an existing MS Excel file or a template to upload transformations. Ensure that the MS Excel file follows the correct template.

To upload transformations, follow these steps:


1. In the **Workspace Mappings** pane, click the **Transformations** node.

The Transformation Details page appears.

Transformation Details				
#	Transformation Name	Informatica Pseudocode	Intended Use	Scope
1	1-DataGov(HighDate:12/31/9999)	To_date(mm/dd/yyyy,12/31/9999)	DataGovernance rule - use on all projects	All Projects
2	2-DataGov(LowDate01/01/0001)	To_date(mm/dd/yyyy, 01/01/0001)	DataGovernance rule - use on all projects	All Projects

2. Click .

The Upload Transformations page appears.

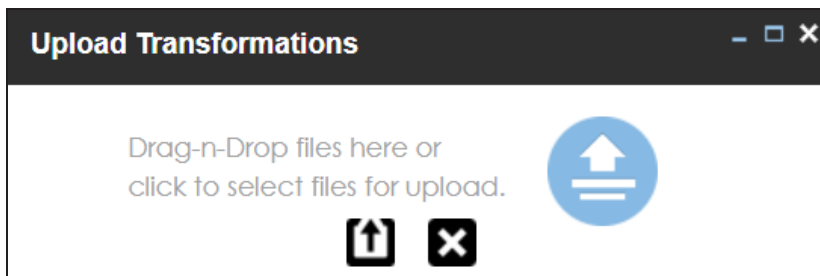

3. Drag and drop or use  to browse and select the MS Excel file.

You can use a template to upload transformations. For more information on downloading templates, refer to the [Downloading Templates](#) section.


4. Click .

The file is uploaded, and transformations are added to the Transformation Details page.

Downloading Templates

To download templates, follow these steps:

1. In the **Workspace Mappings** pane, right-click the **Transformations** node.

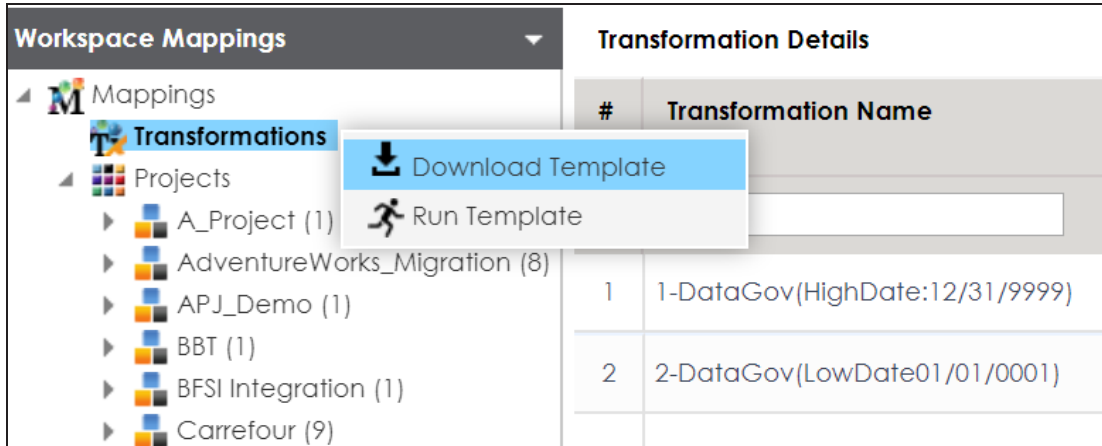

The screenshot shows the 'Workspace Mappings' pane on the left and the 'Transformation Details' pane on the right. In the 'Workspace Mappings' pane, the 'Transformations' node is right-clicked, opening a context menu with two options: 'Download Template' (highlighted in blue) and 'Run Template'. The 'Transformation Details' pane shows a table with two columns: '#' and 'Transformation Name'. The table contains two rows of data.

#	Transformation Name
1	1-DataGov(HighDate:12/31/9999)
2	2-DataGov(LowDate01/01/0001)

2. Click **Download Template**.

The template is downloaded in the XLSX format. You can update the MS Excel file with the required transformations.

Managing Transformations

Managing transformations involves:

- Editing transformations
- Deleting transformations
- Running impact analysis
- Viewing history

To manage transformations, follow these steps:

1. In the **Workspace Mappings** pane, click the **Transformations** node.

The Transformation Details page appears.


#	Transformation Name	BODS Pseudocode	SSIS Pseudocode	Informatica Pseudocode	ODI Pseudocode	Talend Pseudocode
1	1-DataGov(HighDate:12/31/9999)			To_date(mm/dd/yyyy,12/31/9999)		
2	2-DataGov(LowDate01/01/0001)			To_date(mm/dd/yyyy, 01/01/0001)		
3	3-DataGov(AverageChurn)			Count(active customers)/(Count of Cancelled Customers for current month)		

2. Select the required row and right-click it.

The available options appear.

Managing Transformations

#	Transformation Name	BODS Pseudocode	SSIS Pseudocode
31	LAST		
32	FIRST		
33	FLOOR		
34	FV		
35	GET_DATE_PART		



3. Use the following options:

Edit Transformation Details

Use this option to edit transformation details, such as transformation name and its scope.

Delete

Use this option to delete the selected transformation.



If a transformation is already used in a Mapping Specification, it is still visible under it. However, it is not available for future use.

Impact Analysis Report

Hover over **Impact Analysis Report** and use the following options to view impact analysis of transformations:

Default Search: Use this option to view the impact analysis report of the selected transformation.

Advanced Search: Use this option to select multiple transformations and view their impact analysis report.

For example, the following image displays the impact analysis of a transformation.

Managing Transformations

Business Rule: LOWER

Impact Analysis Report

#	Project Name	Mapping Name	Map Specification Version	Business Rule
1	TestData Map	HeteroMultiSrc_Lookup_BR	1.0	LOWER(#1)
2	TestData Map	HeteroMultiSrc_Lookup_BR	1.0	LOWER(#1)
3	TestData Map	HomoMultiSrc_Lookup_BR	1.0	LOWER(#1)
4	TestData Map	HomoMultiSrc_Lookup_BR	1.0	LOWER(#1)
5	TestData Map	MultiSource_Lookup_BusRl	1.0	LOWER(#1)
6	TestData Map	SingleSource_Lookup_BusF	1.0	LOWER(#1)
7	Lineage Demo	Account_Tableau_Report	1.0	LOWER(%1)

History

Use this option to view activity logs of a transformation.

For example, the following image displays the history of a transformation.

Managing Transformations

#	Transformation Name	Pseudocode	Intended Use	Created By	Created Date Time	Last Modified By	Last Modified Date
1	FLOOR		ETL Built-In Transformation: Record handling and processing rule for all projects. Returns the largest integer less than or equal to the numeric value you pass to this function. For example, if you pass 3.14 to FLOOR, the function returns 3. If you pass 3.98 to FLOOR, the function returns 3. Likewise, if you pass -3.17 to FLOOR, the function returns -4.	Administrator	2018-09-14 10:39:48.937	Administrator	2020-16:23


Creating Maps

You can create maps under a project or subject area. You can perform source to target mappings and create mapping specifications in maps. These mapping specifications facilitate your data integration project.

To create maps, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a project or subject area.

Creating Maps

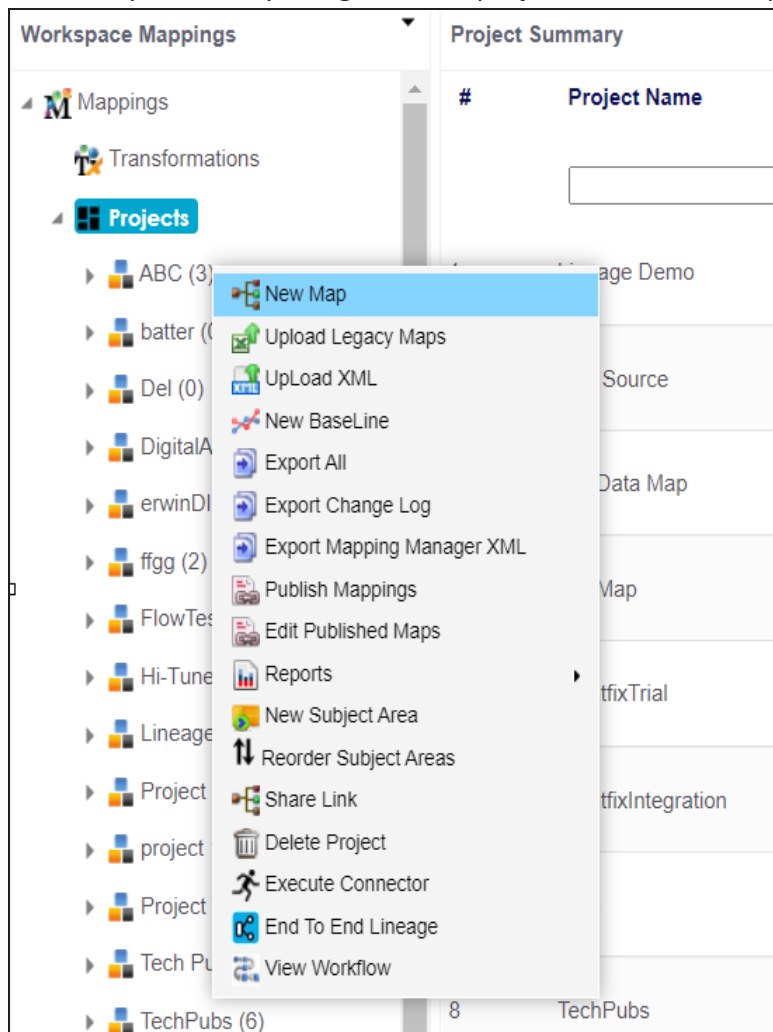

3. Click **New Map**.

The Create a New Mapping page appears.

Creating Maps

Create a new mapping

Mapping Name*

Mapping Version

Version Label

Sync Source Metadata

Sync Target Metadata

Job Name XRef

Mapping Description

Mail Comments

1.00

☐ OFF

☐ OFF

Proceed with Auto Map

Finish

Cancel

Self Help

4. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Mapping Name	Specifies the mapping specification name. For example, EDW_PROD_IDS_Benefits_Detail. This field supports # (hash), @ (at sign), [] (left and right square brackets), ! (exclamation mark), % (percentage), ; (semicolon), = (equals sign), ^ (circumflex accent), and {} (left and right curly brackets) as special characters. For more information on naming conventions, refer to the Best Practices section.


Creating Maps

Field Name	Description
Mapping Version	Specifies the version of the mapping specification. This field is autopopulated. For example, 1.00. For more information on configuring version display of maps, refer to the Configuring Version Display topic.
Sync Source Metadata	Specifies whether source metadata syncs with the mapping. Switch Sync Source Metadata to ON to sync source metadata with the mapping.
Sync Target Metadata	Specifies whether target metadata syncs with the mapping. Switch Sync Target Metadata to ON to sync target metadata with the mapping.
Mapping Description	Specifies the description of the mapping. For example: This is a map between EDW source and IDS target systems.
Mail Comments	Specifies the mail comments, which can be sent to the project users through an email notification. For example: Source and target have identical columns, hence they can be mapped using auto-map technique. For more information on configuring notifications, refer to the Configuring Notifications topic.


5. Click **Finish** or **Proceed with Auto Map**.

When you click Finish, a map is created and saved in the mappings tree. You can create a mapping specification under the map using [drag and drop method](#) or [graphical design](#).

Creating Maps

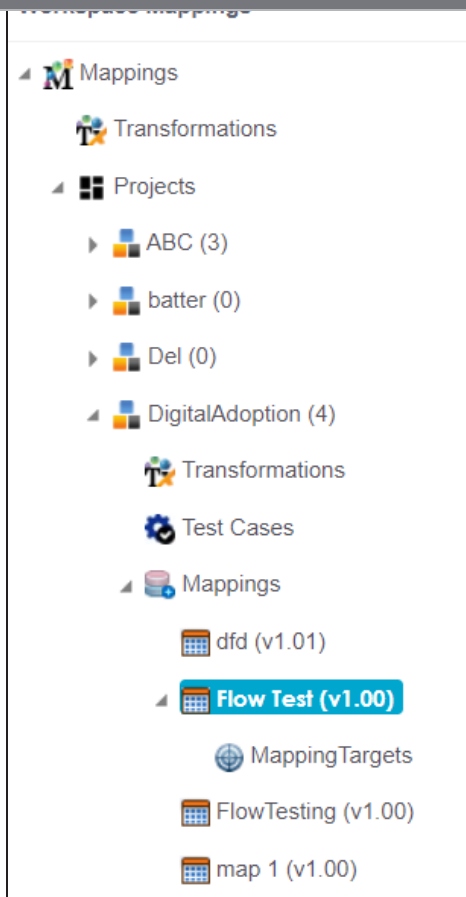

When you click Proceed with Auto Map, you can [create mapping specification using auto-map technique](#).

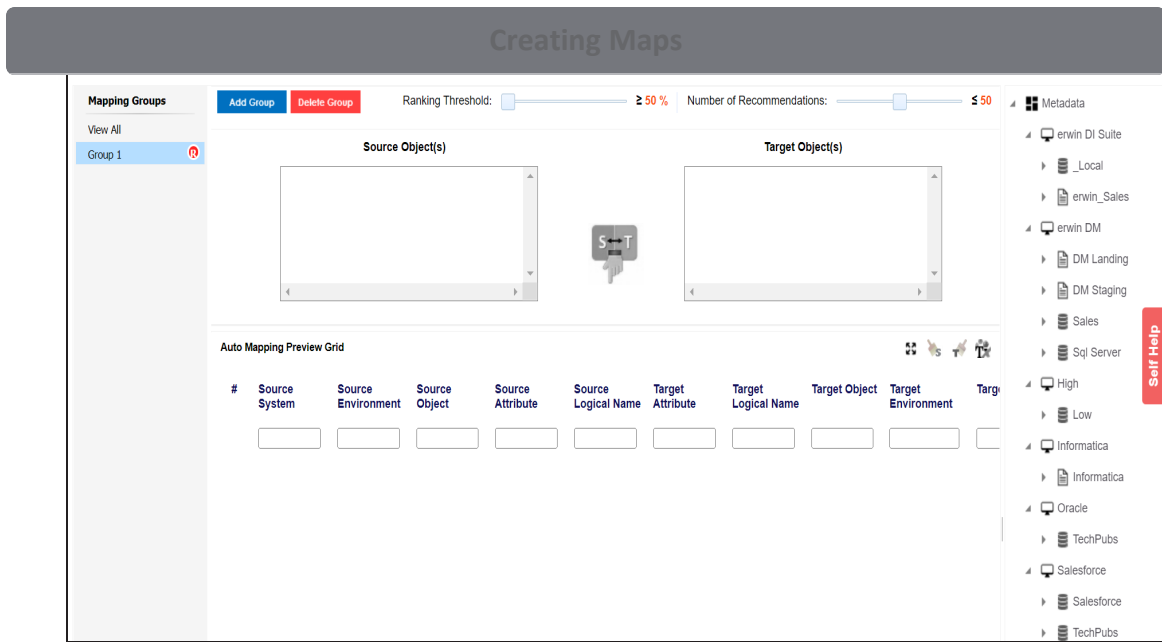

Also, You can assign one or multiple tags to maps. For more information on tagging maps, refer to the [Tagging Maps](#) topic.

Drag and Drop

You can map source metadata with target metadata and create mapping specifications using the drag and drop method. This method is useful even when source column names are different from target column names. After mapping source to target, you can set a [target update strategy](#) for the mappings and enter a description for the strategy.

You can drag and drop tables or columns into the mapping specifications using one of the following:


- [Metadata Search View](#)
- [Metadata Tree View](#)

Creating Mapping Specifications using Metadata Search View

To create mapping specifications using drag and drop method, follow these steps:

1. In the **Workspace Mappings** pane, click a map.


By default, the Mapping Specification tab opens.

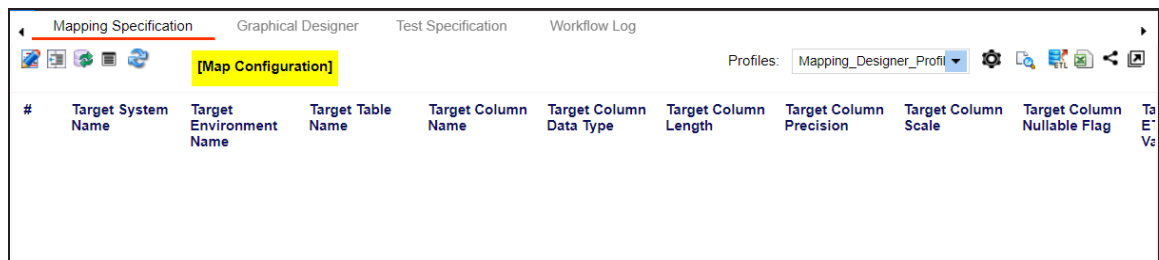

2. Click .

The Mapping Specification grid switches to edit mode.

You can use the Metadata Search View pane to drag and drop the required source table or column into the Mapping Specification grid. The Metadata Search View pane displays technical assets in a hierarchical manner similar to the Metadata Manager.

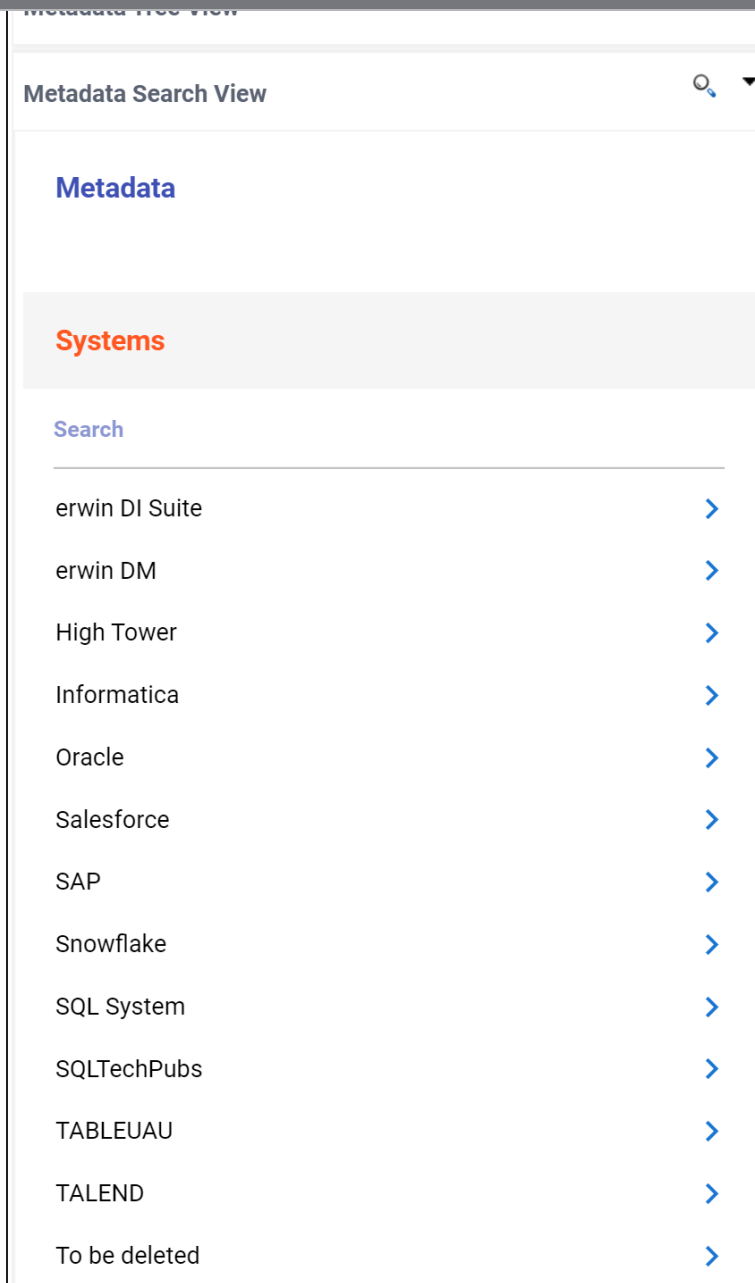

Alternatively, click  to open **Metadata Search** page. This page enables you to search for tables or columns in the metadata by selecting appropriate values.

Drag and Drop

Select System

erwin DM

Select Environment

DM Landing

Select Table

All

Enter Column Name

SEARCH

- Expand a parent node to view its assets, and select the required asset.
For example, open a system node to view relevant environments in it. Then, expand the environment node to view tables and columns respectively.

Metadata Search View

Metadata > erwin DI Suite >

erwin_Sales

Tables

Search

dbo.RM_RESOURCE_New

Columns

Search

RESOURCEID_New

RESOURCENAME_New

RESOURCEDESC_New

Additionally, the search bars in the Metadata Search View enables you to search for specific environments, tables, or columns.

Hover over a table or a column and click  to open **Metadata Properties** page. This

Drag and Drop

4. Drag the selected source table or column from the **Metadata Search View** pane and drop in the **Mapping Specification** grid.

Ensure that you drop source tables or columns under the respective columns.



You cannot drop source systems or environments in the Mapping Specification grid.

The screenshot shows the 'Mapping Specification' window with a grid for defining mappings. The grid has columns for various flags and a 'Source' column. The 'Metadata Search View' pane on the right shows a tree structure with 'erwin DM' and 'DM Landing' selected. Below the tree, there are sections for 'Tables' and 'Columns'. The 'Tables' section lists 'Citizens' and 'Employees'. The 'Columns' section lists 'CitizenID', 'CitizenName', and 'EmployeeID'.

Source Column Identity Flag	Source Column Nullable Flag	Source Percent Null Value	Source Natural Key Flag	Source Primary Key Flag	Source Logical Column	Source SDI Flag	Source SDI Description	Source
☐	☐		☐	☐	Account_ATM_Stz	☐		
☐	☐		☐	☐	Account_Cash_On	☐		
☐	☐		☐	☐	Account_Producti	☒	Restricted	
☐	☐		☐	☐	Cash_On_Delivery	☐		
☐	☐		☐	☐	No_of_Records_A	☒	Confidential	
☐	☐		☐	☐		☐		
☐	☐		☐	☐		☐		
☐	☐		☐	☐		☐		

5. Similarly, drag the target table or column from the **Metadata Search View** pane and drop in the **Mapping Specification** grid.

Ensure that you drop target tables or columns under the respective columns.

6. Click


The mapping specification is saved.

Creating Mapping Specifications Using Metadata Tree View

To create mapping specifications using drag and drop method, follow these steps:

1. In the **Workspace Mappings** pane, click a map.

By default, the Mapping Specification tab opens.

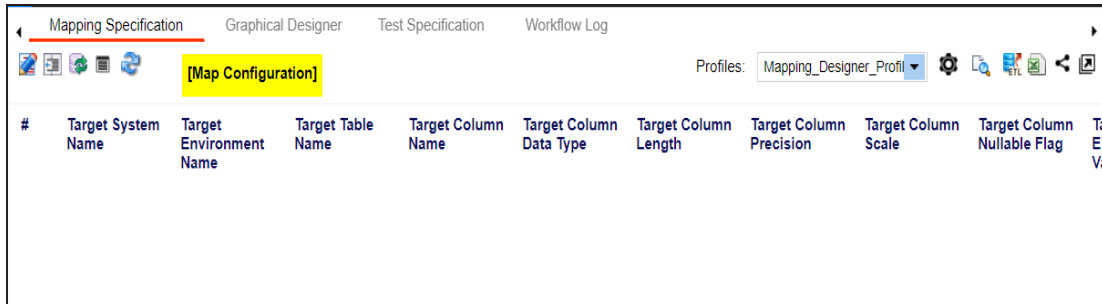

2. Click .

You can now edit the Mapping Specification grid.

3. Drag the selected source table or column from the **Metadata Tree View** pane and drop in the **Mapping Specification** grid.


Ensure that you drop source tables or columns under the respective columns.



You cannot drop source systems or environments in the Mapping Specification grid.

Drag and Drop									
APPEND DATA [Account_Tableau_Report] Profiles: Mapping_Designer_Pr									
#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable
1	TABLEAU	Presentation Layer	Account	Acct Atm Status	STRING	0	0	0	☐
2	Snowflake	Snowflake_STG	stg.STG_LINEITEM	SQN_NUM	NUMBER	0			☐
3	Northwind_Tgt_sy	Northwind_Tgt	dbo.Orders	ShipName	nvarchar	40	0	0	☐

Alternatively, click to use the search function on the Metadata Tree View pane to locate the required asset in the list.

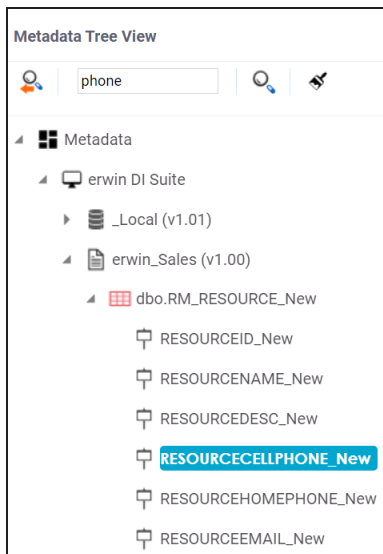

4. Drag the selected target table or column from the **Metadata Tree View** pane and drop in the **Mapping Specification** grid.

Ensure that you drop target tables or columns under the respective columns.



You cannot drop target systems or environments in the Mapping Specification grid.

The mapping specification is saved.


Setting Target Update Strategy

To set the target update strategy, follow these steps:

1. Expand the **Additional Mapping Information** pane and click the **Target Update Strategy** tab.

This pane is available at bottom of the central pane when you click a map in the Workspace Mappings pane.

2. On the **Target Update Strategy** tab, click .

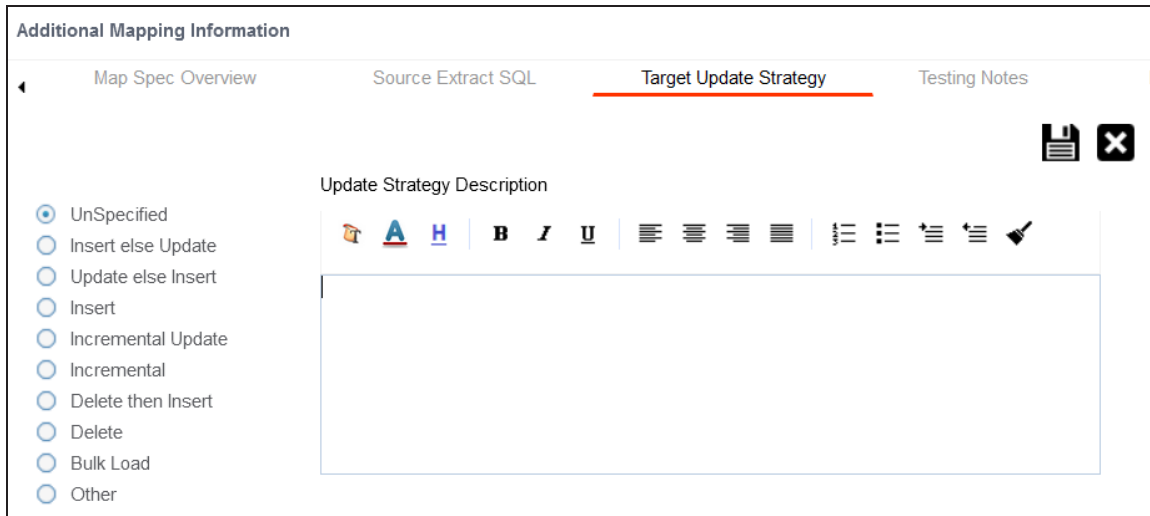

3. Click the required strategy, enter **Update Strategy Description**, and click . The target update strategy is set.

4. Click .

The source to target mapping is saved.

You can enrich a mapping specification by:

- [Adding transformation and lookup details](#)
- [Associating code cross walks \(code mappings\)](#)

- [Linking requirements](#)

After creating a mapping specification, you can analyze a mapping specification. [Analyzing mapping specifications](#) involves:

- Generating virtual preview of target
- Previewing data
- Performing table gap analysis
- Performing column gap analysis
- Running impact analysis
- Running lineage analysis
- Running end to end lineage
- Opening business view
- Viewing mapping statistics

Graphical Designer

You can use the Graphical Designer tab to map source metadata with target metadata and create mapping specifications. This method is useful even when source column names are different from target column names. After mapping source to target, you can set a [target update strategy](#) for the mappings and enter a description for the strategy.

You can create mapping specifications in the Graphical Designer tab using one of the following:


- [Metadata Search View](#)
- [Metadata Tree View](#)

Creating Mapping Specifications using Metadata Search View

To create mapping specifications graphically, follow these steps:


1. In the **Workspace Mappings** pane, click a map.

By default, the Mapping Specification tab opens.

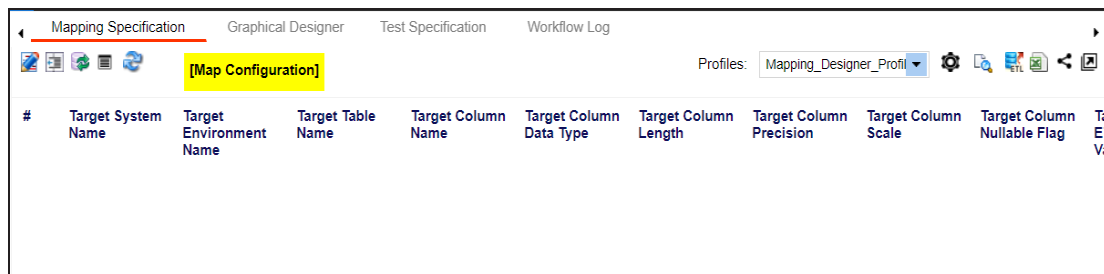

2. Click the **Graphical Designer** tab.


The following page appears.

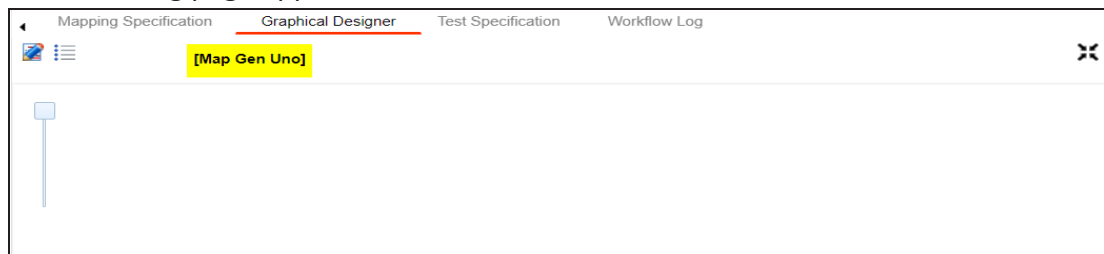

or click .

The Graphical Designer tab switches to edit mode.

You can use the Metadata Search View pane to drag and drop the required source table or column into the Graphical Designer. The Metadata Search View pane displays technical assets in a hierarchical manner similar to the Metadata Manager.

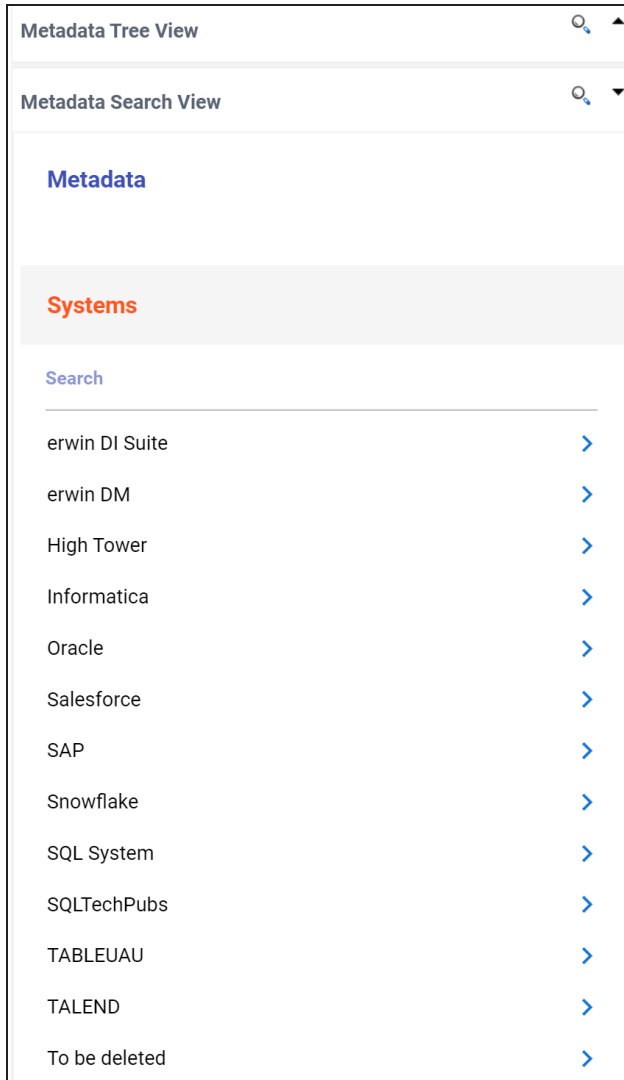

Alternatively, click  to open **Metadata Search** page. This page enables you to search for tables or columns in the metadata by selecting appropriate values.

Graphical Designer

Select System

erwin DM

Select Environment

DM Landing

Select Table

All

Enter Column Name

SEARCH

erwin DM → DM Landing → All

#	Table Name	Column Name	Table Definition	Table Comments	Logical Table Name	Logical Column Name	Column Definition
1	Citizens	CitizenID			Citizens	CitizenID	
2	Citizens	CitizenName			Citizens	CitizenName	
3	Citizens	EmployeeID			Citizens		
4	Employees	EmployeeName			Employees	EmployeeName	
5	Employees	EmployeeID			Employees	EmployeeID	

4. Expand a parent node to view its assets, and select the required asset.
For example, open a system node to view relevant environments in it. Then, expand

Metadata Search View

Metadata > erwin DI Suite >

erwin_Sales

Tables

Search

dbo.RM_RESOURCE_New

Columns

Search

RESOURCEID_New

RESOURCENAME_New


RESOURCEDESC_New

Graphical Designer

specific environments, tables, or columns.

Hover over a table or a column and click **i** to open **Metadata Properties** page. This page displays business, technical, and extended properties of the selected asset.


5. Drag the selected source table from the **Metadata Search View** pane and drop on the **Graphical Designer** tab.
6. On the **Graphical Designer** tab, select the source table and click ▼ next to the Auto Map option. Then, select **As Source** option to specify the table as source.

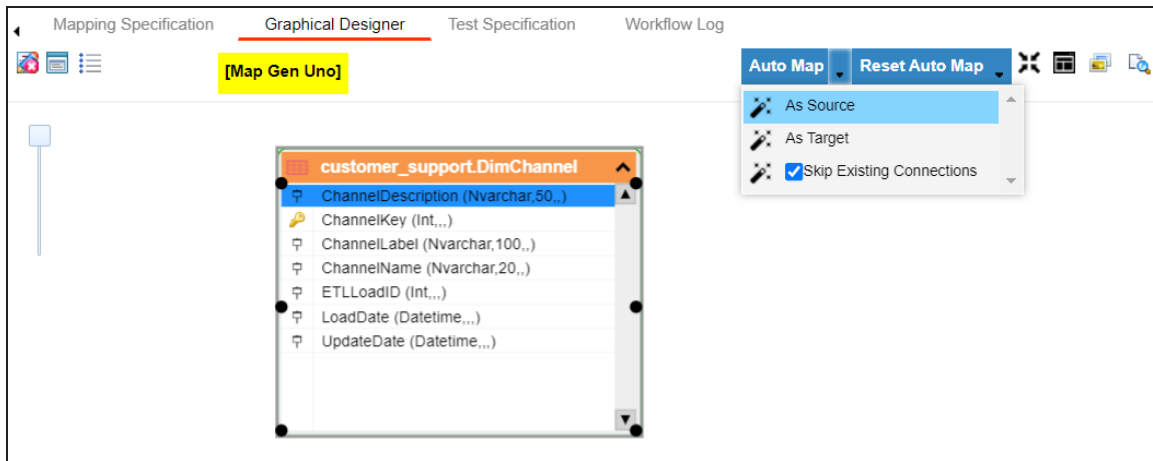

7. Similarly, drag target table from the **Metadata Search View** pane and drop on the **Graphical Designer** tab.

Graphical Designer


Map option. Then, select **As Target** to specify the table as target.

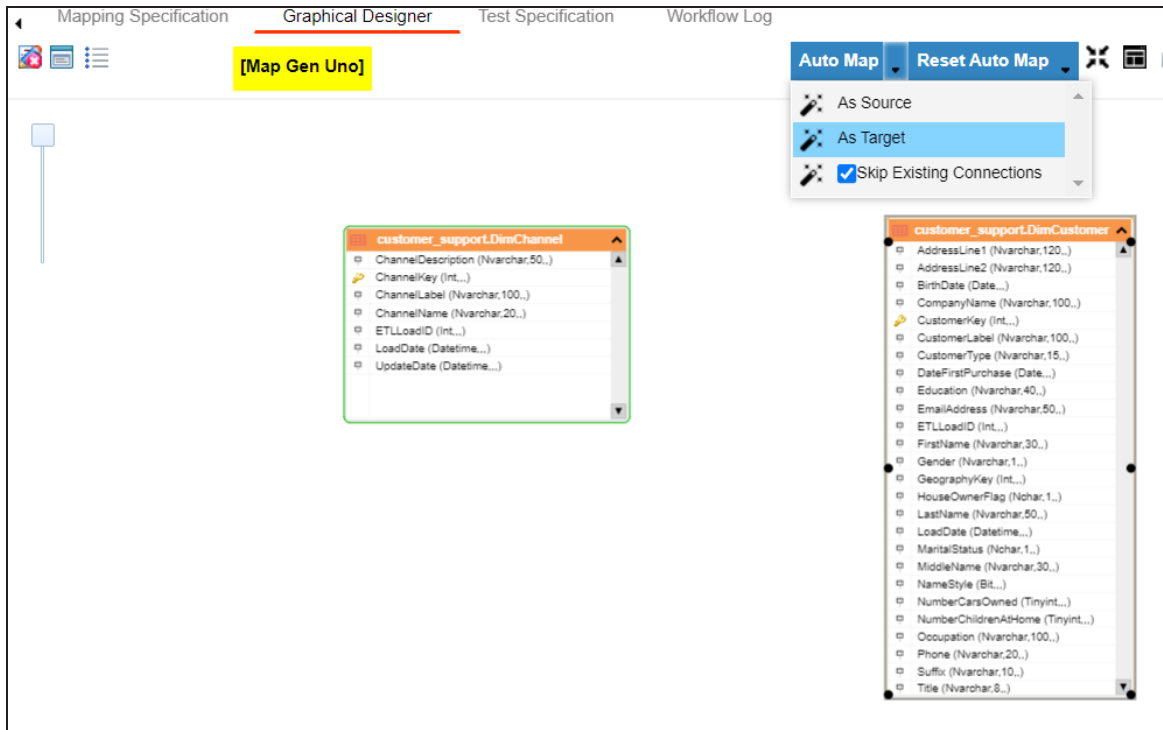

Graphical Designer


- If the source and target have same column names, click **Auto Map**.

The source and target columns are mapped.

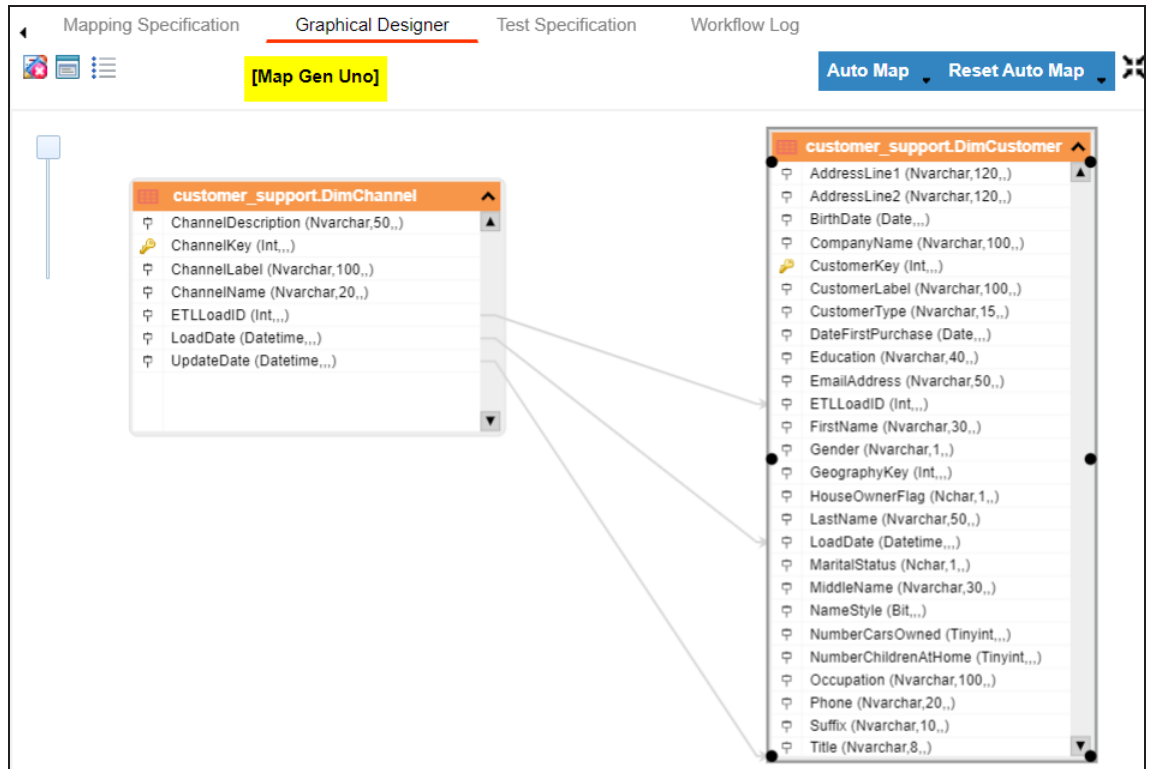

- If the source and target have different column names, then click and drag your mouse from a source column to the required target column.

required assets.

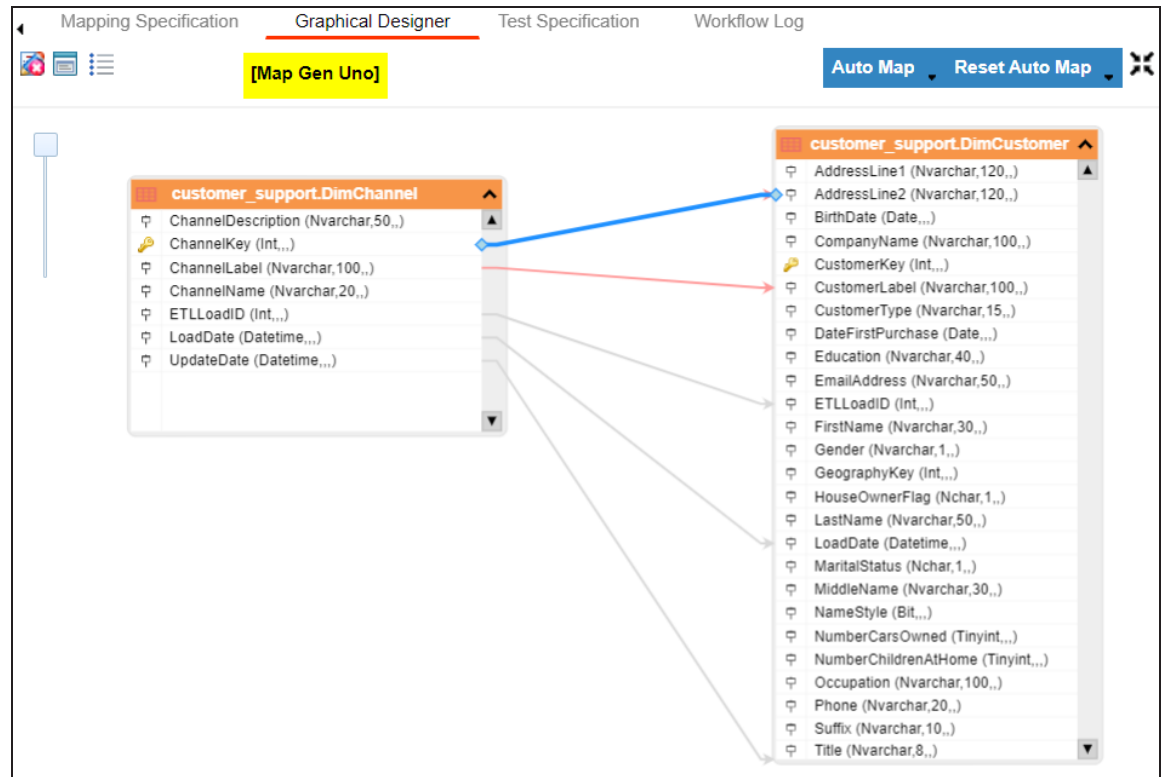

10. Click .


The mapping specification is saved.

Creating Mapping Specifications using Metadata Tree View

To create mapping specifications graphically, follow these steps:


1. In the **Workspace Mappings** pane, click a map.

By default, the Mapping Specification tab opens.

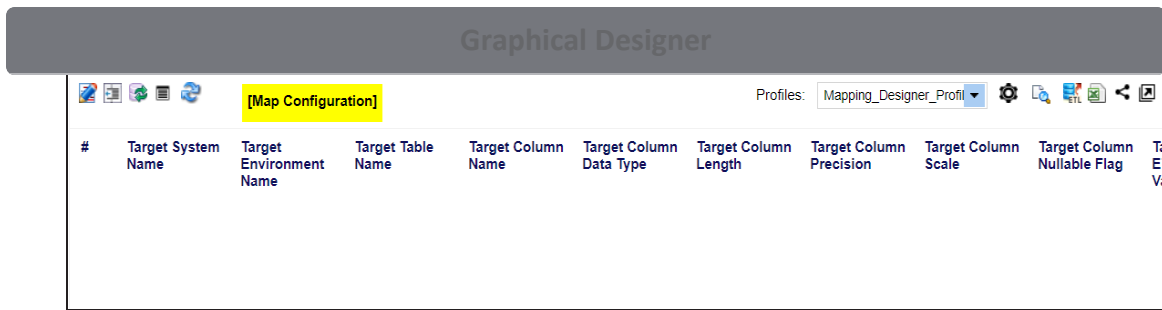

2. Click the **Graphical Designer** tab.

The following page appears.

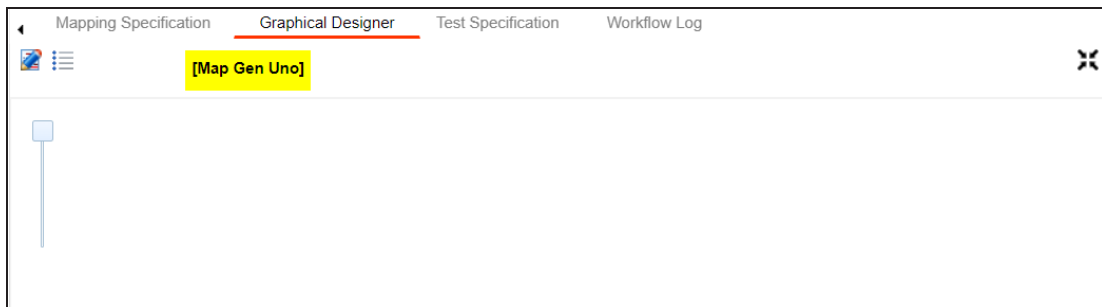

3. Click .
4. Drag the selected source table from the **Metadata Tree View** pane and drop on the **Graphical Designer** tab.
Alternatively, click  to use the search function on the Metadata Tree View pane to


Metadata Tree View

phone

- Metadata
 - erwin DI Suite
 - _Local (v1.01)
 - erwin_Sales (v1.00)
 - dbo.RM_RESOURCE_New
 - RESOURCEID_New
 - RESOURCENAME_New
 - RESOURCEDESC_New
 - RESOURCECELLPHONE_New**
 - RESOURCEHOMEPHONE_New
 - RESOURCEEMAIL_New


Graphical Designer

Map option. Then, select **As Source** option to specify the table as source.

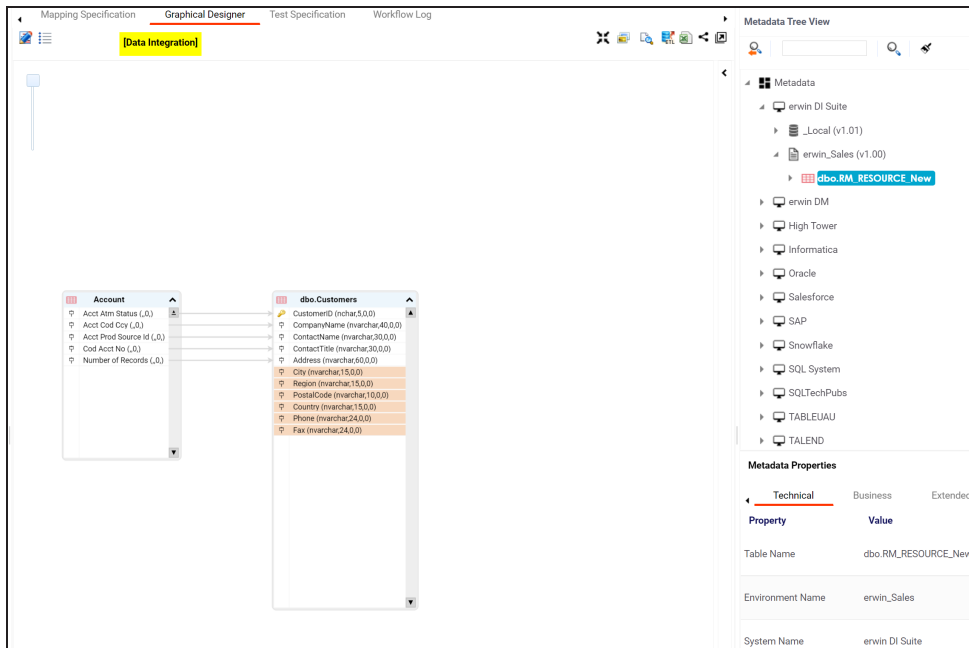


6. Drag the selected target table from the **Metadata Tree View** pane and drop on the **Graphical Designer** tab.

Map option. Then, select **As Target** to specify the table as target.

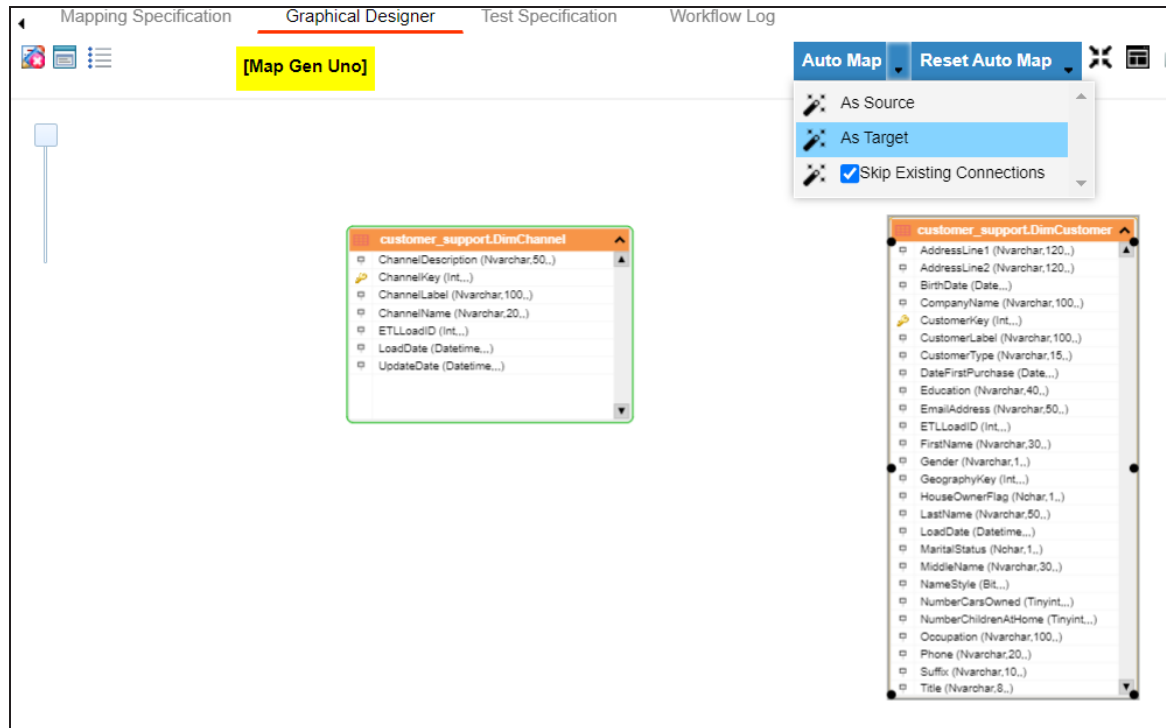


8. Use the following options to map source with target:
 - If the source and target have same column names, click **Auto Map**.

mapped automatically.

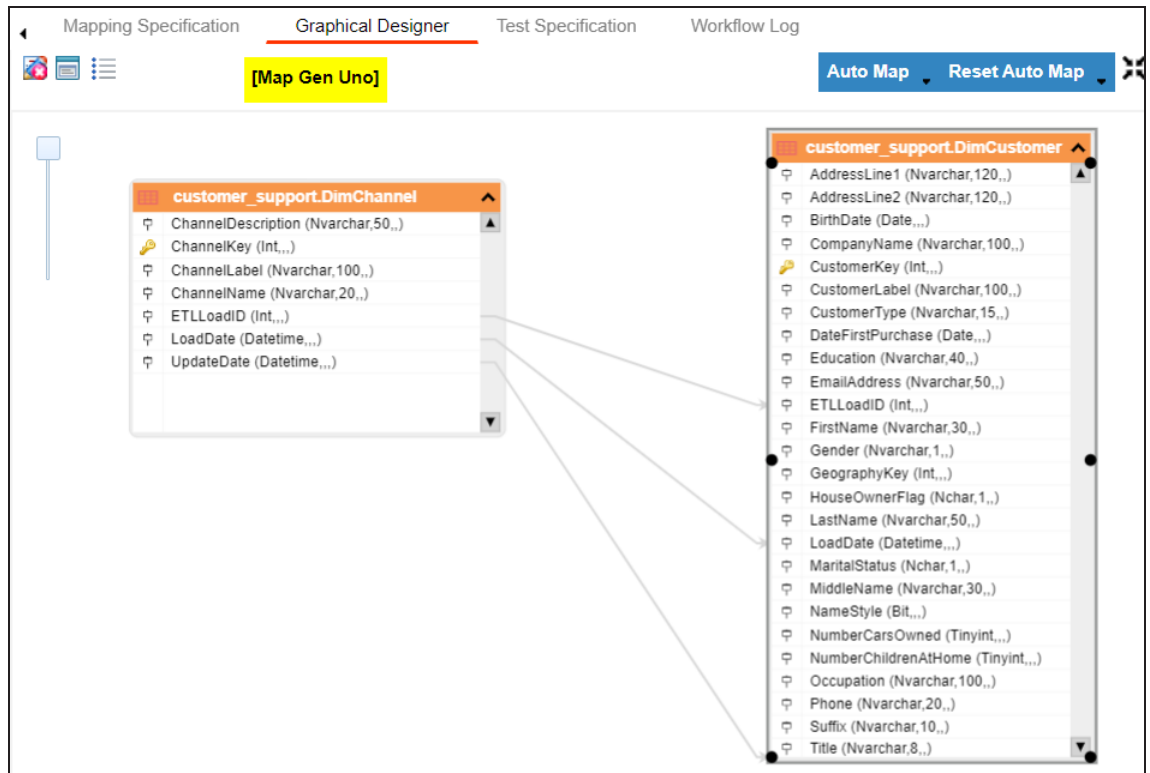

If the source and target have different column names, then click and drag your mouse from a source column to the required target column.

and red arrows) that are mapped manually.

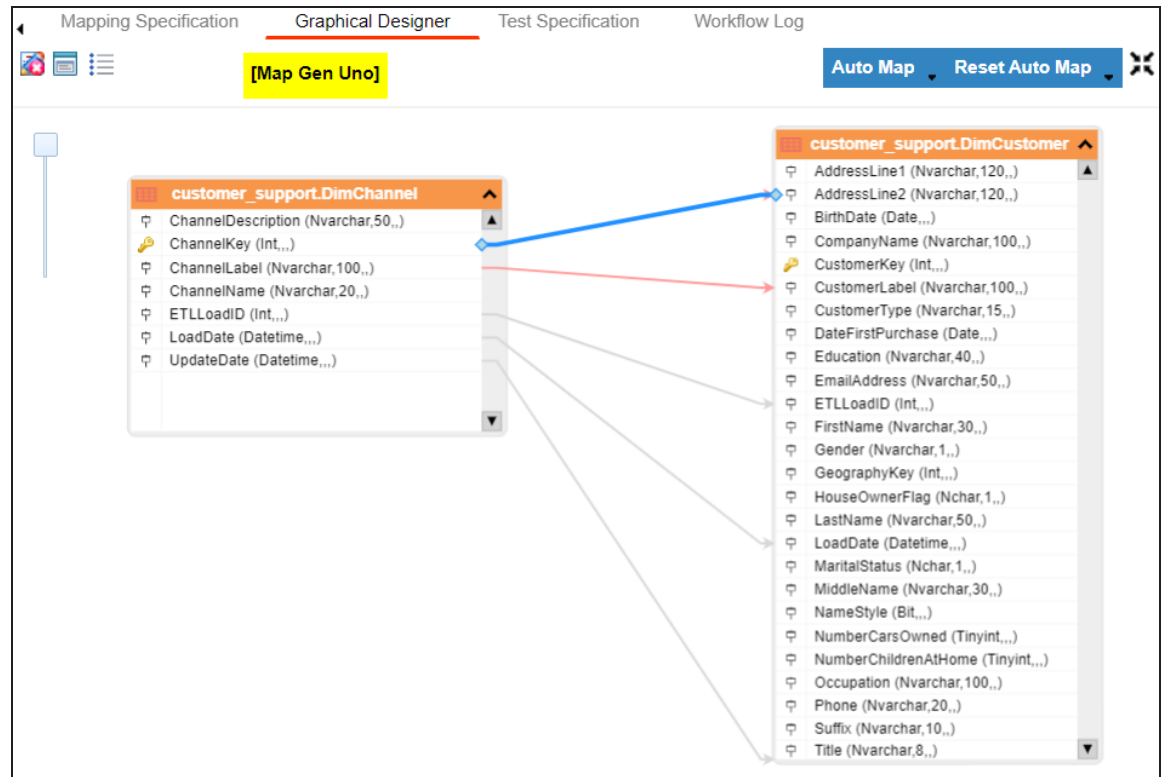

9. Click .

The mapping specification is saved.


Setting Target Update Strategy

To set the target update strategy, follow these steps:

1. Expand the **Additional Mapping Information** pane and click the **Target Update Strategy** tab.

This pane is available at bottom of the central pane when you click a map in the Graphical Designer tab.

2. On the **Target Update Strategy** tab, click .

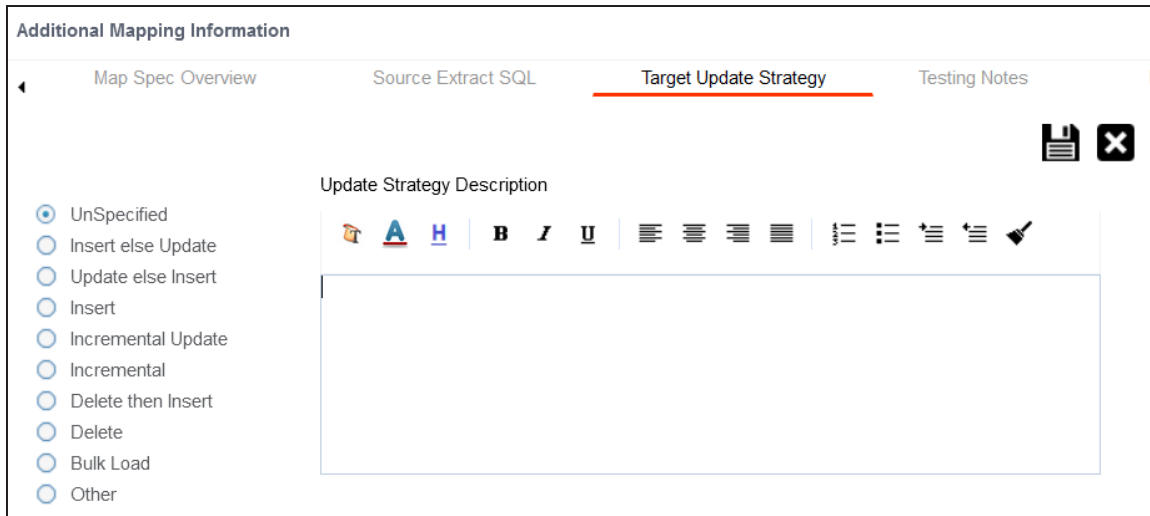

3. Click the required strategy, enter **Update Strategy Description**, and click .

The target update strategy is set for the mapping specification.

4. Click .

The source to target mapping is saved.

You can enrich a mapping specification by:

- [Adding transformation and lookup details](#)
- [Associating code cross walks \(code mappings\)](#)
- [Associating reference tables](#)
- [Linking requirements](#)

After creating a mapping specification, you can analyze a mapping specification. [Analyzing mapping specifications](#) involves:

- Generating virtual preview of target
- Previewing data
- Performing table gap analysis
- Performing column gap analysis
- Running impact analysis

- Running end to end lineage
- Opening business view
- Viewing mapping statistics

Auto-Map


Starting erwin Data Intelligence (erwin DI) v15.0, you can use the auto-map feature to create mapping specifications even when source and target column names do not match. With this feature, you can view recommended matches for a source column and select the most appropriate target column.

Creating Mapping Specifications

To create mapping specifications using auto-map, follow these steps:

1. In the **Workspace Mappings** pane, right-click a project or subject area.

The available options appear.

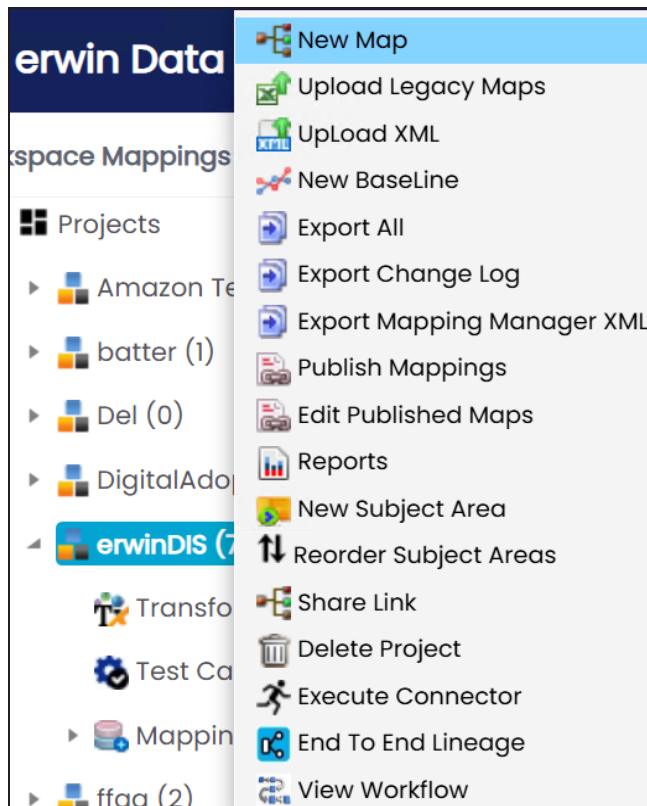

2. Click **New Map**.

Create a New Mapping

Mapping Name*

Mapping Version

Version Label

Sync Source Metadata ☐ OFF

Sync Target Metadata ☐ OFF

Job Name XRef


Mapping Description

Mail Comments

Proceed with Auto Map **Finish** **Cancel**


Self Help

3. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. For field description, refer to the [Creating Maps](#) topic.
4. Click **Proceed with Auto Map**.
The Auto Map Source & Target Objects page appears.
5. Drag the target table from the **Metadata** pane and drop it in the **Target Object(s)** box.
You can add more than one target tables.

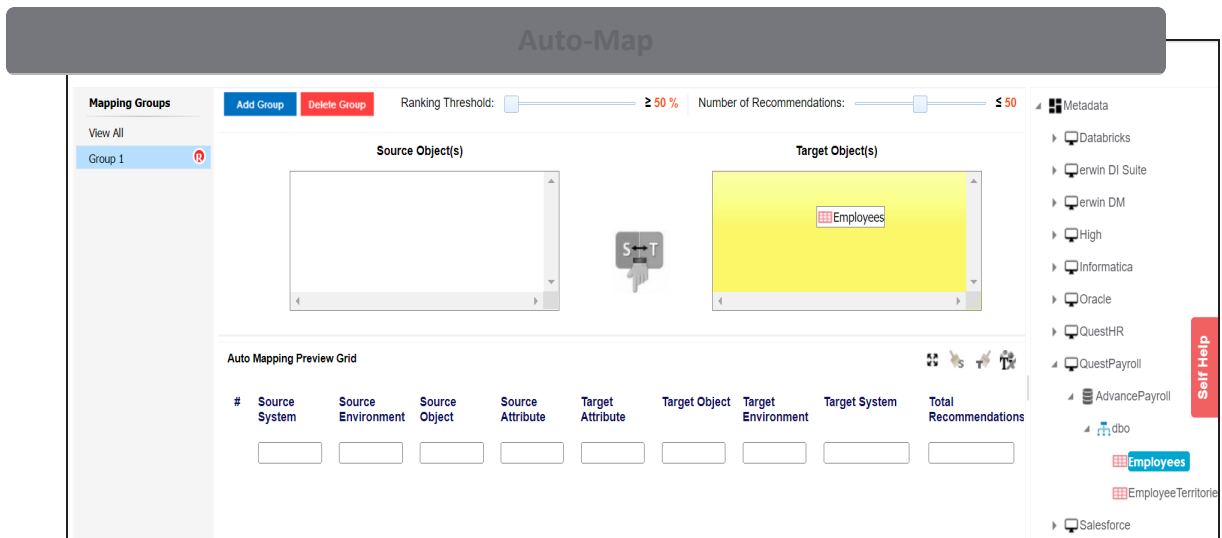

6. Drag source table from the **Metadata** pane and drop it in the **Source Object(s)** box.

You can add more than one source tables.

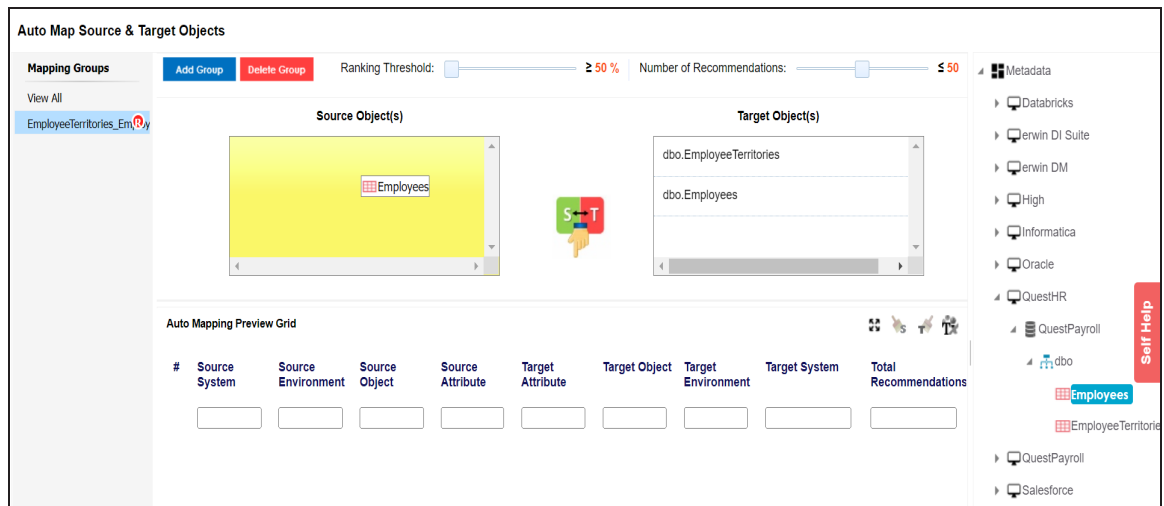

7. Click .

The Auto Mapping Preview Grid displays a list of recommended matches (target columns) for each source column based on maximum matching score. In case the recommended match is not suitable, you can evaluate more recommendations and [assign targets manually](#).

Auto-Map

Mapping Groups
Add Group
Delete Group
Ranking Threshold:
Number of Recommendations:

View All

EmployeeTerritories_Em

Source Object(s)

dbo.EmployeeTerritories

dbo.Employees

Target Object(s)

dbo.EmployeeTerritories

dbo.Employees

Auto Mapping Preview Grid

#	Source System	Source Environment	Source Object	Source Attribute	Target Attribute	Target Object	Target Environment	Target System	Total Recommendations
5	QuestHR	QuestPayroll	dbo.Employees	City	City	dbo.Employees	AdvancePayroll	QuestPayroll	2
6	QuestHR	QuestPayroll	dbo.Employees	Country	Country	dbo.Employees	AdvancePayroll	QuestPayroll	2
7	QuestHR	QuestPayroll	dbo.Employees	EmployeeID	EmployeeIDNu	dbo.Employees	AdvancePayroll	QuestPayroll	3

Total Rows: 21 | Target Tables: 2 | Source Tables: 2 | Targets Not Mapped: 1 | Sources Not Mapped: 1

☐ Create a distinct Mapping for every Group

8. Use the following options to manage the auto-map recommendations:

Ranking Threshold

Use this option to set the threshold for match scores. Matches with scores below this threshold do not appear as recommendations. By default, it is set at $\geq 50\%$, which means that matches with scores below 50% are not recommended.

Number of Recommendations

Use this option to limit the number of recommendations. By default, it is set to ≤ 50 , which means that number of recommended matches cannot exceed 50.

Maximize (🔍)

Use this option to maximize or minimize the Auto Mapping Preview Grid.

Delete Orphan Sources (🗑️)

Use this option to delete source attributes that are not mapped.

Delete Orphan Targets (🗑️)

Use this option to delete target attributes that are not mapped.

Auto-Map

Add Transformations (R)

Use this option to [add transformations](#) for the auto map. You can add business rule, extended business rule transformation, look up reference column, lookup on, and trans look up condition.

Add Group

Use this option to add a mapping group to perform other mappings.

Rename Mapping Group (R)

Use this option to rename a mapping group.

Delete Group


Use this option to delete a mapping group. To delete a mapping group, click the mapping group and then click **Delete Group**.

Create a distinct Mapping for every Group

Use this option to create distinct mapping for every group.

9. Click **Finish**.

A new map is created and saved under the Mappings tree. All the auto-maps in the multiple mapping groups appear in the same sequence in the Mapping Specification grid.

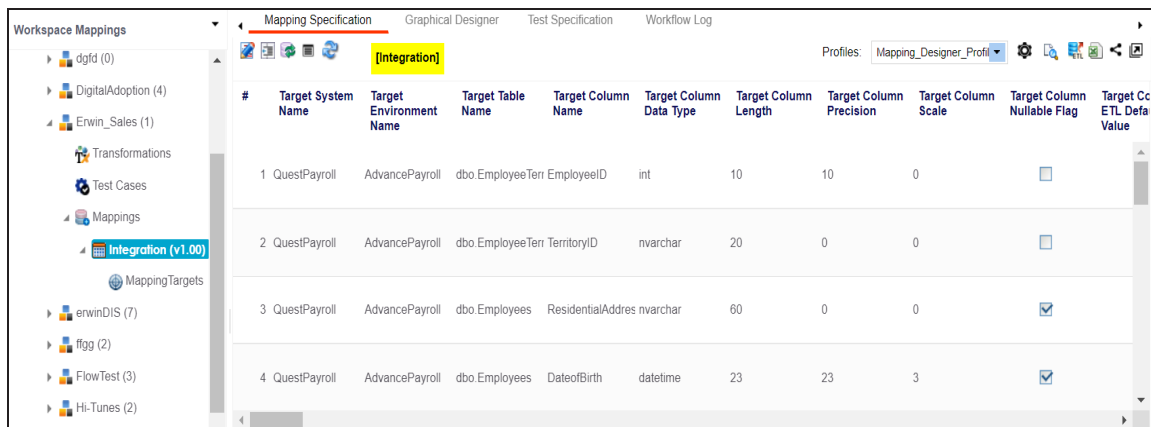

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable Flag	Target Column ETL Default Value
1	QuestPayroll	AdvancePayroll	dbo.EmployeeTerr	EmployeeID	int	10	10	0	☐	
2	QuestPayroll	AdvancePayroll	dbo.EmployeeTerr	TerritoryID	nvarchar	20	0	0	☐	
3	QuestPayroll	AdvancePayroll	dbo.Employees	ResidentialAddress	nvarchar	60	0	0	☒	
4	QuestPayroll	AdvancePayroll	dbo.Employees	DateofBirth	datetime	23	23	3	☒	

Assigning Targets Manually

ber of mapping recommendations. To view the recommendations for required rows, click the corresponding number.

The Total Recommendations on page appears. It displays the recommended matches for the source column. By default, a match with the highest score is selected.

For example, the following image displays the recommended matches for a source column, EmployeeID.

The screenshot shows a dialog box titled "Total Recommendations on" with a subtitle "EmployeeID (QuestHR -> QuestPayroll -> dbo.Employees)". There is a green button labeled "Assign As Target" in the top right corner. Below the subtitle is a table with the following columns: "Select", "#", "Target Attribute", "Target Object", "Target Environment", and "Target System".

Select	#	Target Attribute	Target Object	Target Environment	Target System
☐	1	EmployeeID	dbo.EmployeeTerritories	AdvancePayroll	QuestPayroll
☒	2	EmployeeIDNumber	dbo.Employees	AdvancePayroll	QuestPayroll
☐	3	EmployeeExtension	dbo.Employees	AdvancePayroll	QuestPayroll

You can reject the default match and select another recommended match. To select a match, click the required radio button, and then click **Assign As Target**.


Setting Target Update Strategy

To specify target update strategy, follow these steps:

1. Expand the **Additional Mapping Information** pane.

This pane is available at the bottom of the central pane on clicking a map in the Workspace Mappings pane.

2. Click the **Target Update Strategy** tab.

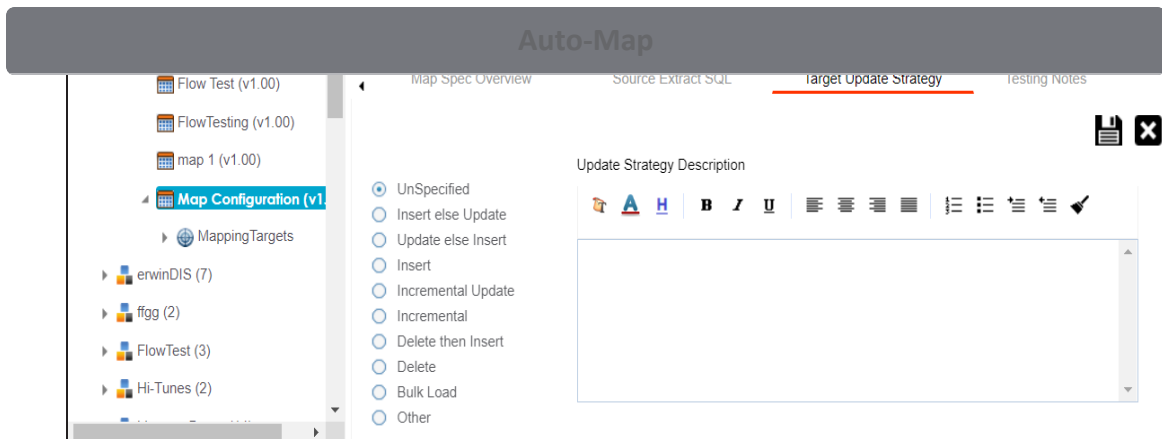

3. Click .

4. Click the required strategy, enter **Update Strategy Description**, and click .

The target update strategy is configured.


Adding Transformations

You can add transformations to an auto-map and specify whether it is applicable to exact match, orphan source, orphan target, or all the rows.

To add transformations in auto-maps, follow these steps:

1. Under the **Auto Mapping Preview Grid**, click .

The Auto Map Transformation page appears.

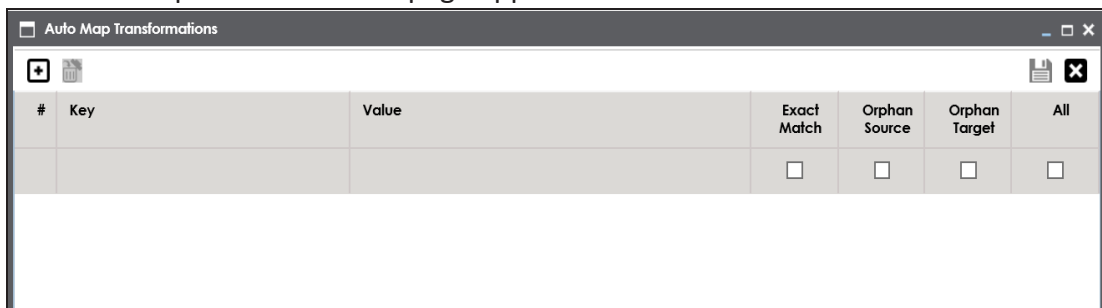

2. Click .

A row is added to the grid.

3. Double-click the cell under the **Key** column and select the required transformation.



You can use transformations created under the Transformations node only for Business Rule. For other transformations, enter the required value.

Auto Map Transformations

#	Key	Value	Exact Match	Orphan Source	Orphan Target	All
1	Business Rule	TO_FLOAT TO_INTEGER TRUNC UPPER VARIANCE	☐	☐	☐	☐

5. Use the following options:

Exact Match

Use this option to apply the transformation on the exactly matched rows in the Auto Mapping Preview Grid.

Orphan Source

Use this option to apply the transformation on the orphan source rows in the Auto Mapping Preview Grid.

Orphan Target

Use this option to apply the transformation on the orphan target rows in the Auto Mapping Preview Grid.

All

Use this option to apply the transformation on every row in the Auto Mapping Preview Grid.

6. Click .

The transformations are added to the auto map.

You can enrich a mapping specification by:

- [Associating code cross walks \(code mappings\)](#)
- [Associating reference tables](#)
- [Linking requirements](#)

After creating a mapping specification, you can analyze a mapping specification. [Analyzing mapping specifications](#) involves:

- Generating virtual preview of target
- Previewing data
- Performing table gap analysis
- Performing column gap analysis
- Running impact analysis
- Running lineage analysis
- Running end to end lineage
- Opening business view
- Viewing mapping statistics

One to Many and Many to Many Mapping Specifications

You can map multiple source columns to single or multiple target columns to create a mapping specification. After mapping source to target, you can set a [target update strategy](#) for the mappings and enter a description for the strategy.

You can create mapping specifications in the Graphical Designer tab using one of the following:


- [Metadata Search View](#)
- [Metadata Tree View](#)

Creating Mapping Specifications Using Metadata Search View

To create one to many or many to many mapping specifications, follow these steps:

1. In the **Workspace Mappings** pane, click a map.

By default, the Mapping Specification tab opens.

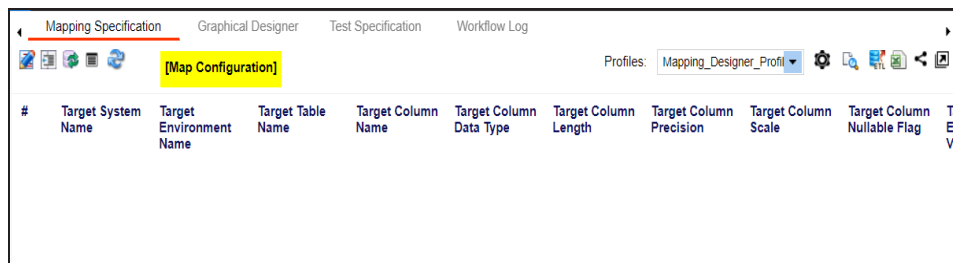


2. Click .

The Mapping Specification grid switches to edit mode.

3. Switch  to **ON**.

The append mode is enabled. You can now drop multiple columns from the Metadata Search View pane in one row of the Mapping Specification grid.

You can use the Metadata Search View pane to drag and drop the required source table or column in the Mapping Specification grid. The Metadata Search View pane displays technical assets in a hierarchical manner similar to the Metadata Manager.

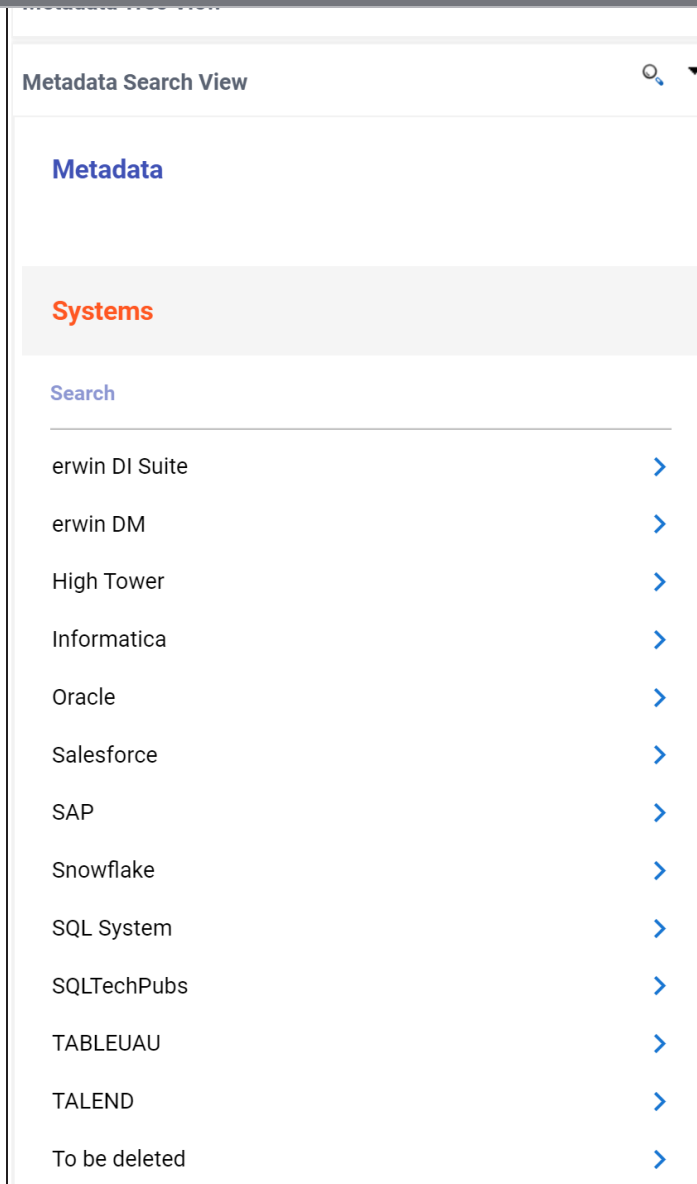

Alternatively, click  to open **Metadata Search** page. This page enables you to search for tables or columns in the metadata by selecting appropriate values.

One to Many and Many to Many Mapping Specifications

Select System
erwin DM

Select Environment
DM Landing

Select Table
All

Enter Column Name

SEARCH

erwin DM → DM Landing → All

#	Table Name	Column Name	Table Definition	Table Comments	Logical Table Name	Logical Column Name	Column Definition
1	Citizens	CitizenID			Citizens	CitizenID	
2	Citizens	CitizenName			Citizens	CitizenName	
3	Citizens	EmployeeID			Citizens		
4	Employees	EmployeeName			Employees	EmployeeName	
5	Employees	EmployeeID			Employees	EmployeeID	

- Expand a parent node to view its assets, and select the required asset.
For example, open a system node to view relevant environments in it. Then, expand

Metadata Search View 

Metadata > **erwin DI Suite** >

erwin_Sales

Tables

Search

dbo.RM_RESOURCE_New

Columns

Search

RESOURCEID_New

RESOURCENAME_New

RESOURCEDESC_New

One to Many and Many to Many Mapping Specifications

environments, tables, or columns.

Hover over a table or a column and click  to open **Metadata Properties** page. This page displays business, technical, and extended properties of the selected asset.

5. Drag one or multiple source columns from the **Metadata Search View** pane in the **Mapping Specification** grid under the **Source Columns Name** column.

pane.

The screenshot shows a software interface with two panes. The top pane is titled "Metadata Tree View" and contains a breadcrumb path: "Metadata > erwin DI Suite > _Local". Below this is a section titled "Tables" in red text, followed by a "Search" input field. The search results for tables are listed below: customer_support.DimChannel, customer_support.DimCustomer, dbo.CompareLongBinary, dbo.CompareLongBinary2, dbo.CompareLongChar, dbo.CompareLongChar2, dbo.DimAccount, and dbo.DimChannel. The bottom pane is titled "Columns" in red text, followed by a "Search" input field. The search results for columns are listed below: ChannelKey, ChannelLabel, ChannelName, and ChannelDescription.

Metadata Tree View

Metadata Search View

Metadata > erwin DI Suite > _Local

Tables

Search

customer_support.DimChannel

customer_support.DimCustomer

dbo.CompareLongBinary

dbo.CompareLongBinary2

dbo.CompareLongChar

dbo.CompareLongChar2

dbo.DimAccount

dbo.DimChannel

Columns

Search

ChannelKey

ChannelLabel

ChannelName

ChannelDescription


One to Many and Many to Many Mapping Specifications

ping Specification under the **Target Columns Name**.

7. Click .

The mapping specification is saved.

You can view the mapping specification on the **Graphical Designer** tab to view the graphical representation of the one to many mappings.

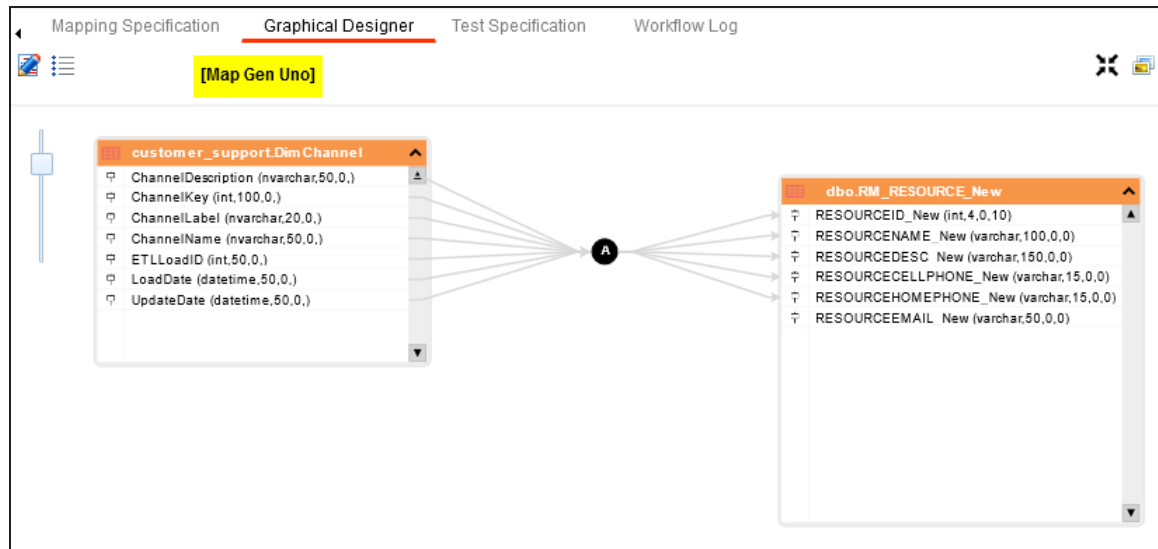


Creating Mapping Specifications Using Metadata Tree View

To create one to many or many to many mapping specifications, follow these steps:

1. In the **Workspace Mappings** pane, click a map.

By default, the Mapping Specification tab opens.

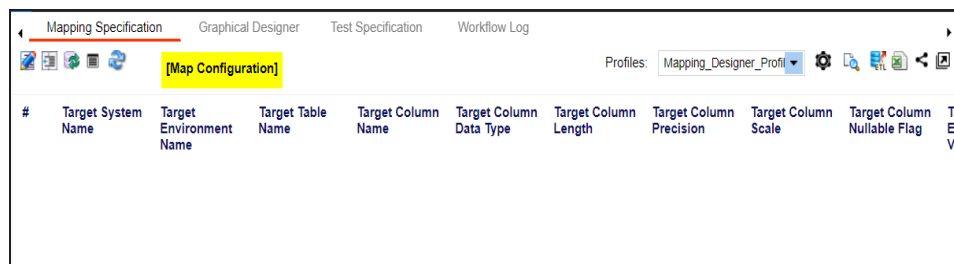

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable Flag	To E' Vs


2. Click .

One to Many and Many to Many Mapping Specifications


The append mode is enabled. You can now drop multiple columns from the Metadata Tree View pane in one row of the Mapping Specification grid.

4. Drag one or multiple source columns from the **Metadata Tree View** pane in the **Mapping Specification** grid under the **Source Columns Name** column.

You can use the Ctrl key to select multiple columns in the Metadata Tree View pane.

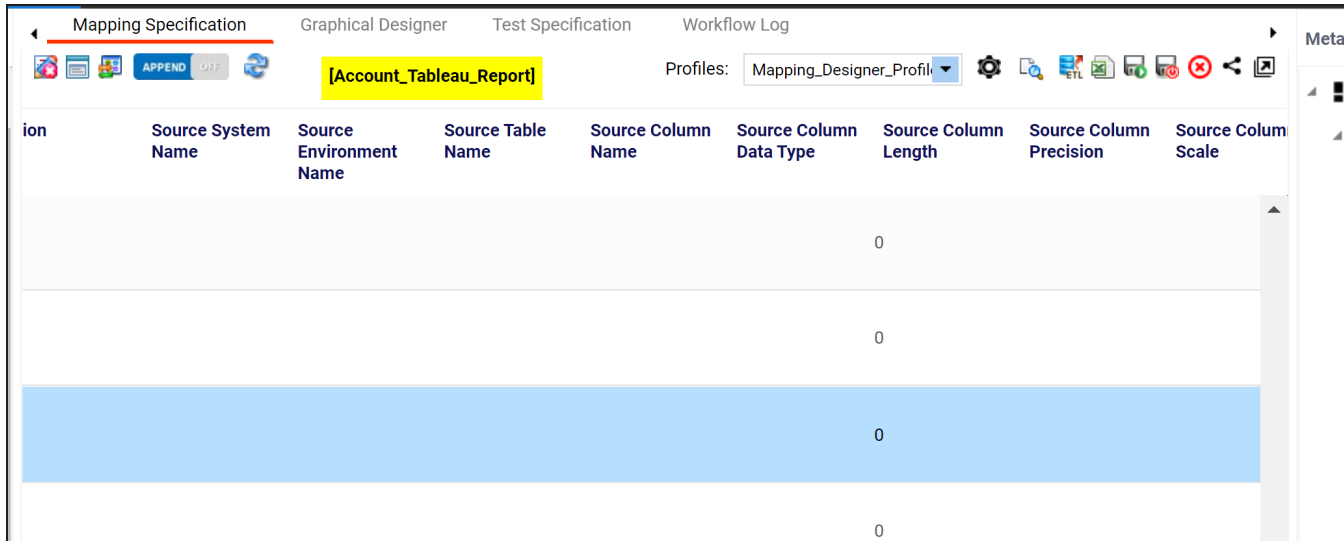

Alternatively, click  to use the search function on the Metadata Tree View pane to

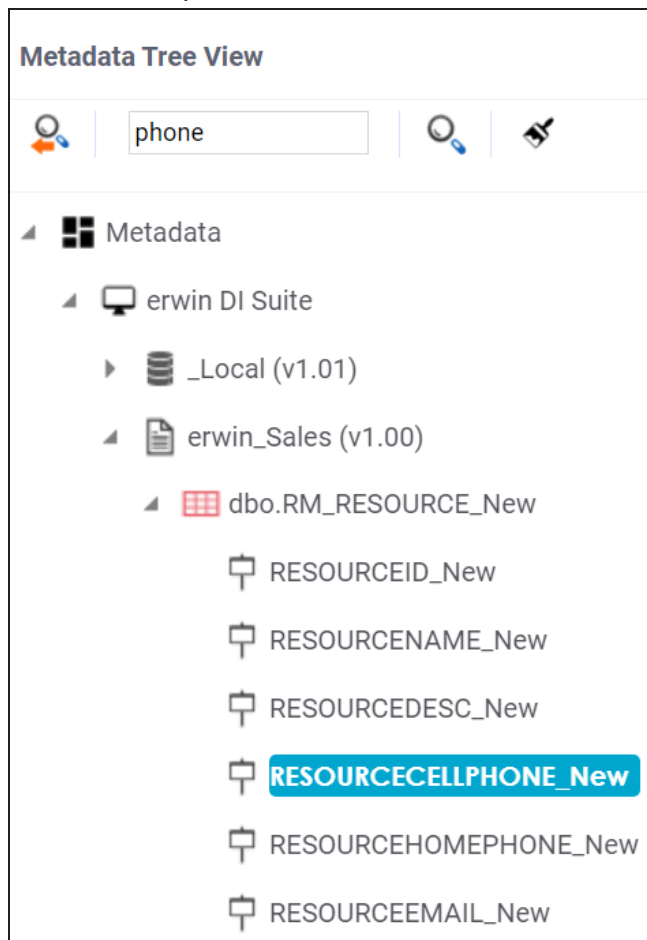


5. Similarly, drag single or multiple target columns from **Metadata Tree View** in **Mapping Specification** under the **Target Columns Name**.
6. Click .

The mapping specification is saved.

One to Many and Many to Many Mapping Specifications


graphical representation of the one to many mappings.

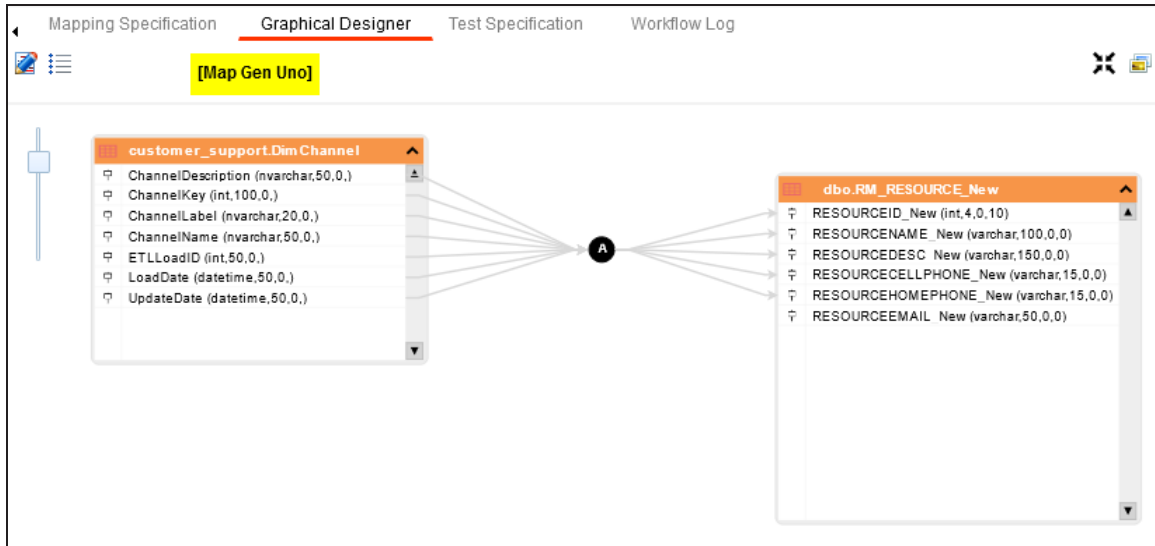

Setting Target Update Strategy

To set target update strategy, follow these steps:

1. Expand the **Additional Mapping Information** pane and click the **Target Update Strategy** tab.
2. On the **Target Update Strategy** tab, click .

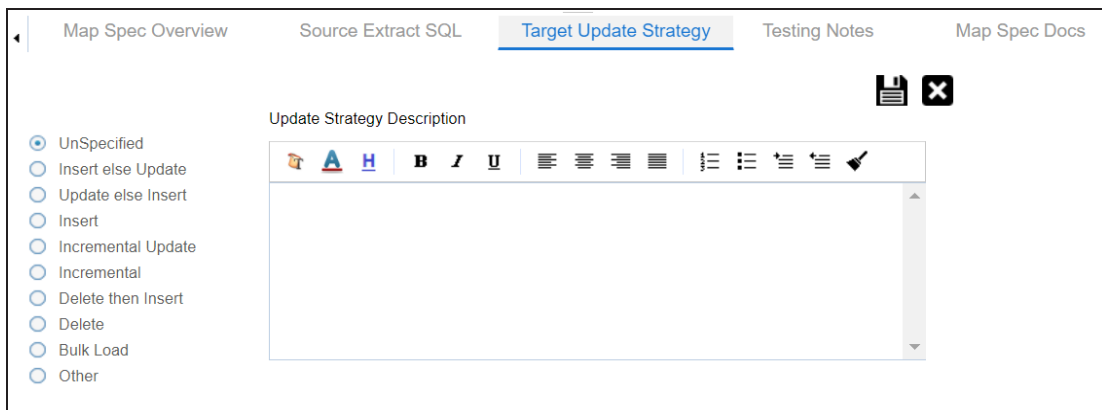

3. Click the required strategy, enter **Update Strategy Description**, and click .

The source to target mapping is saved.

You can enrich a mapping specification by:

- [Adding transformation and lookup details](#)
- [Associating code cross walks \(code mappings\)](#)
- [Associating reference tables](#)
- [Linking requirements](#)

After creating a mapping specification, you can analyze a mapping specification. [Analyzing mapping specifications](#) involves:

- Generating virtual preview of target
- Previewing data
- Performing table gap analysis
- Performing column gap analysis
- Running impact analysis
- Running lineage analysis
- Running end to end lineage
- Opening business view
- Viewing mapping statistics

Adding Transformation and Lookup Details

You can add transformation and lookup details to a mapping specification in the Mapping Specification grid.

Adding transformation details involves setting up:

- Business rule
- Extended business rule transformation

Ensure that you define business rules under the Transformations node for the same ETL Option as the Project ETL. For more information on defining business rules, refer to the [Defining Transformations](#) section.

Adding lookup details involves setting up:

- Trans lookup condition
- Lookup reference column
- Lookup on

Ensure that you scan the required table in the Metadata Manager to set trans lookup condition.

Adding Transformation Details

To add business rules to mapping specifications, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.

By default, it opens the Mapping Specification tab.

Adding Transformation and Lookup Details									
[Integration]									
#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Color Scale
1	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCEID_New	int	4	10	0	
2	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCENAME	varchar	100	0	0	
3	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCEDESC_N	varchar	150	0	0	

3. Right-click the header menu of the **Mapping Specification** grid.

Mapping Specification									
[Integration]									
#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule		
1	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEID	int	4			
2	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCENAME	varchar	100			
3	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEDESC	varchar	150			

4. Select the **Business Rule** check box.

The Business Rule column is now available in the Mapping Specification grid.

5. Click .

You can now edit the Mapping Specification grid.

6. Double-click the cell under the **Business rule** column for the required source column.

The available transformations appear.

Adding Transformation and Lookup Details						
Environment	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule	Extended Business Rule Transformation
Integration	dbo.RM_RESOURCE	RESOURCEID	int	4		
Integration	dbo.RM_RESOURCE	RESOURCENAME	varchar	100	1-DataGov(HighDate:12/31/9999) 2-DataGov(LowDate01/01/0001) 3-DataGov(AverageChurn) ABORT ABS ADD_TO_DATE	
Integration	dbo.RM_RESOURCE	RESOURCEDESC	varchar	150		
Integration	dbo.RM_RESOURCE	RESOURCECELLPH	varchar	15		

7. Select a business rule.

You can add business rules for multiple source columns.

8. Click .

The business rules are added to the mapping specification.

To add extended business rule transformations, follow these steps:

1. Right-click the header menu of the **Mapping Specification** grid.

Mapping Specification							
[Integration]							
#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEID			
2	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCENAME			
3	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEDESC	varchar	150	

2. Select the **Extended Business Rule Transformation** check box.

Adding Transformation and Lookup Details


Specification grid.

- Click .

You can now edit the Mapping Specification grid.


- Click .

The available options appear.

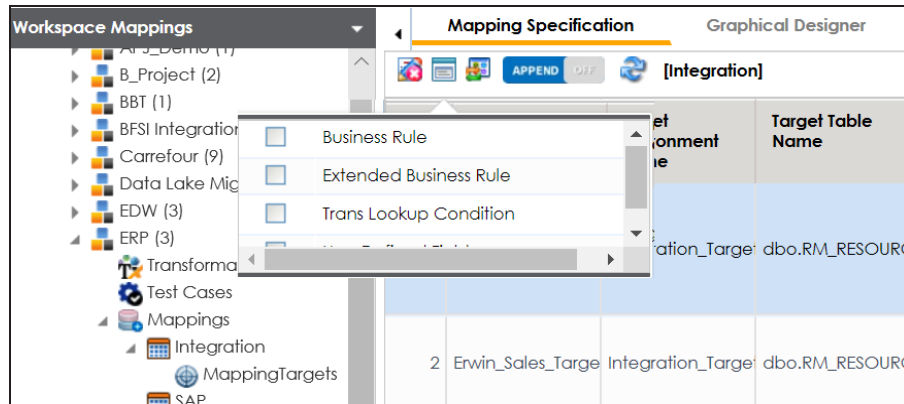


- Select the **Extended Business Rule** check box.
- In the **Mapping Specification** grid, double-click the cell under the **Extended Business rule Transformation** column for the required source column.

The Extended Transformation Rule Editor page appears.

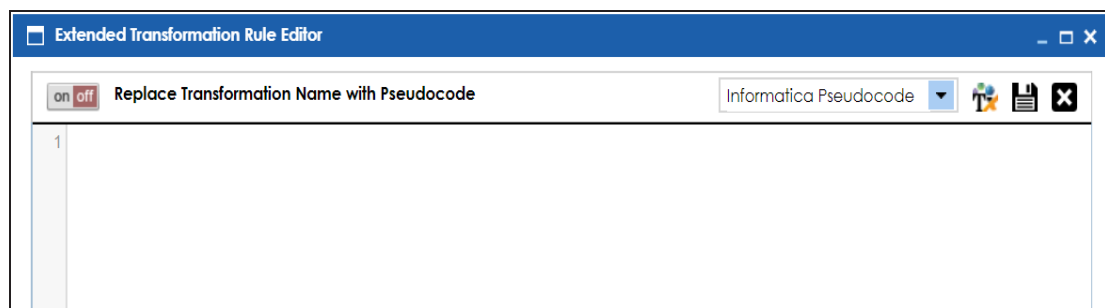


- Select a pseudocode based on the Project ETL.
For example, if the Project ETL is Informatica then select Informatica Pseudocode.

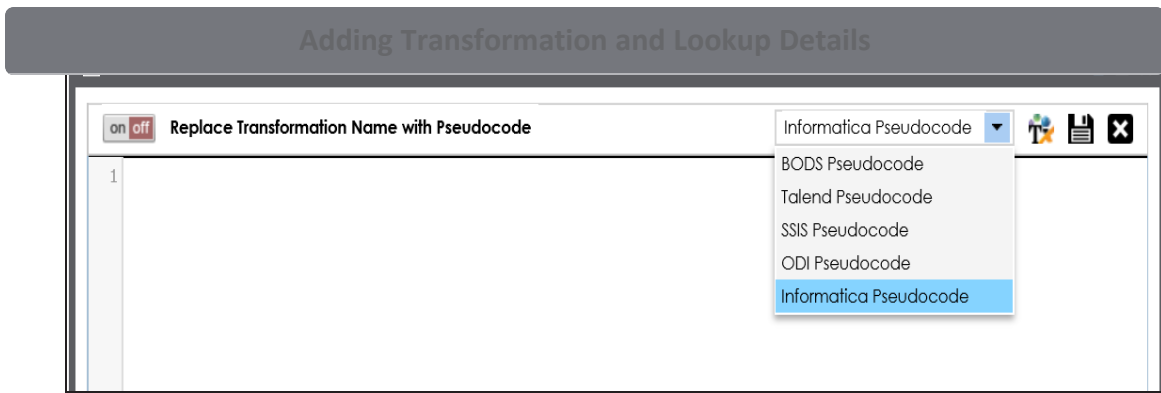

8. Press Ctrl + Space keys.

The available transformations appear.

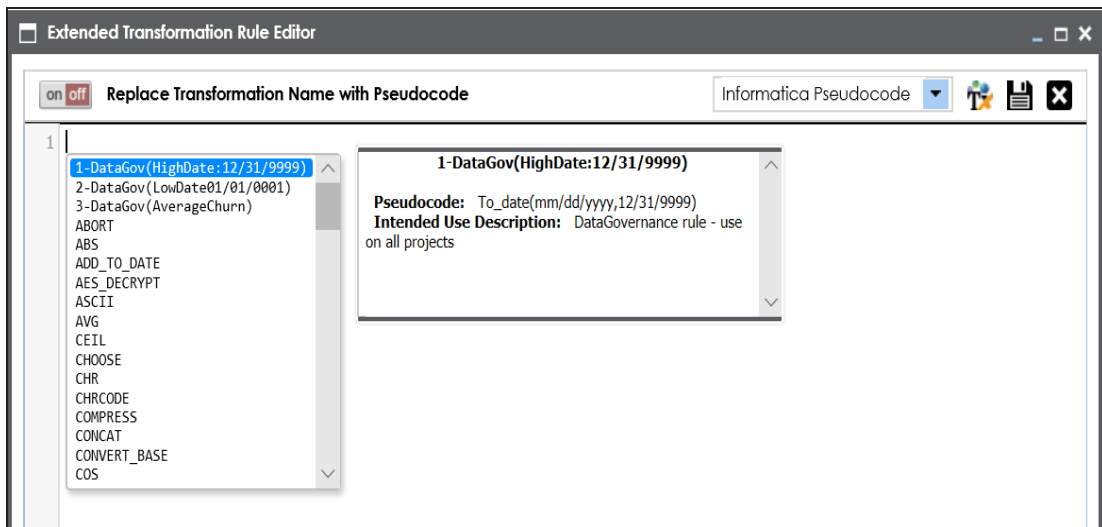

If the required transformation is not available in the list, use  to create and update the transformations list.

9. Double-click the required transformation.

You can use  to replace the transformation name with the pseudocode.

10. Click .

The extended business rule transformation is added to the source column. You can add extended business rule transformation to multiple source columns. You can also

Adding Transformation and Lookup Details

labels, refer to the [Configuring Language Settings](#) topic.

Adding Lookup Details

To add lookup details in mapping specifications, follow these steps:

1. Right-click the header menu of the mapping specification grid.
2. Select **Lookup Reference Column**, **Lookup On**, and **Trans Lookup Condition**.

The screenshot shows the 'Mapping Specification' tab in the software interface. A context menu is open over the grid header, showing options: CSM Mapping, Specification Artifacts, Lookup Reference Column (checked), Lookup On (checked), Trans Lookup Condition (checked), Source Column Precision, Source Column Scale, and Source Column DB Default Value. The grid below has columns: Source Column Name, Source Column Data Type, Source Column Length, Business Rule, Extended Business Rule, Target System Name, and Target Environment Name. Data rows include JRCID, JRCENAME, and JRCEDESC.

Source Column Name	Source Column Data Type	Source Column Length	Business Rule	Extended Business Rule	Target System Name	Target Environment Name
JRCID	int	4	FLOOR		Erwin_Sales_Target	Integr
JRCENAME	varchar	100	REVERSE		Erwin_Sales_Target	Integr
JRCEDESC	varchar	150			Erwin_Sales_Target	Integr

3. Drag the required table from the **Metadata Tree View** pane and drop it under the **Trans Lookup Condition** column for the required source column.

The screenshot shows the 'Mapping Specification' tab with the 'SalesforceIntegration' profile. The grid has columns: Lookup Reference Column, Lookup On, Trans Lookup Condition, Source System Name, Source Environment Name, Source Table Name, Source Column Name, and Source Data Type. Four rows of lookup details are shown, each with a SQL query in the 'Trans Lookup Condition' column. A fifth row is highlighted in yellow, showing a table 'dbo.RM_RESOURCE_New' being added to the 'Trans Lookup Condition' column.

Lookup Reference Column	Lookup On	Trans Lookup Condition	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Data Type
actName	ContactName	SELECT ContactName FROM dbo.Customers WHERE ContactName = APPQOSSYS.WLM_CLASSIFIER_PLA	Oracle	TechPubs	APPQOSSYS.WLM OPER		NUM
actName	ContactName	SELECT ContactName FROM dbo.Customers WHERE ContactName = APPQOSSYS.WLM_CLASSIFIER_PLA	Oracle	TechPubs	APPQOSSYS.WLM NCLSR		NUM
actTitle	ContactTitle	SELECT ContactTitle FROM dbo.Customers WHERE ContactTitle = APPQOSSYS.WLM_CLASSIFIER_PLA	Oracle	TechPubs	APPQOSSYS.WLM CLPCSTR		VARC
ss	Address	SELECT Address FROM dbo.Customers WHERE Address = APPQOSSYS.WLM_CLASSIFIER_PLA	Oracle	TechPubs	APPQOSSYS.WLM ACTIVE		CHA
		dbo.RM_RESOURCE_New	Oracle	TechPubs	APPQOSSYS.WLM SEQNO		NUM

Adding Transformation and Lookup Details

Once trans lookup condition is set for the source column, you can add lookup reference column and lookup on.

To add lookup reference column, double-click the cell under the **Lookup Reference Column** column and select the required option.

Mapping Specification							
[Integration]							
in	Created By	Created Date	Lookup Reference Column	Lookup On	Trans Lookup Condition	Last Modified By	Last M Date T
	Administrator	2020-01-12 20:40:27.5			SELECT ID, SOURCE_OBJECT_ID, SOURCE_OBJECT_ID, TARGET_OBJECT_ID, TARGET_OBJECT_ID, RELATIONSHIP_DETAIL_ID FROM dbo.ADS_ASSOCI	Administrator	2020 12:2
	Administrator	2020-01-12 20:40:27.5	ID			Administrator	2020 12:2
	Administrator	2020-01-12 20:40:27.5	SOURCE_OBJECT_ID			Administrator	2020 20:4

To add lookup on, double-click the cell under the **Lookup On** column and select the required option.

Mapping Specification							
[Integration]							
in	Created By	Created Date	Lookup Reference Column	Lookup On	Trans Lookup Condition	Last Modified By	Last M Date T
	Administrator	2020-01-12 20:40:27.5	ID		SELECT ID, SOURCE_OBJECT_ID, SOURCE_OBJECT_ID, TARGET_OBJECT_ID, TARGET_OBJECT_ID, RELATIONSHIP_DETAIL_ID FROM dbo.ADS_ASSOCI	Administrator	2020 12:2
	Administrator	2020-01-12 20:40:27.5		ID		Administrator	2020 12:2
	Administrator	2020-01-12 20:40:27.5		SOURCE_OBJECT_ID		Administrator	2020 20:4

4. Click .

The lookup details are added in the Mapping Specification. You can add lookup details for multiple source columns.

graphically. For more information about adding transformation and lookup details graphically, refer to the [Graphical Designer](#) topic.

Graphical Designer

You can add transformation and lookup details to a mapping specification on the Graphical Designer tab.

Adding transformation details involves setting up:

- Business rule
- Extended business rule transformation

Ensure that you define business rules under the Transformations node for the same ETL Option as the Project ETL. For more information on defining business rules, refer to the [Defining Transformations](#) section.

Adding lookup details involves setting up:

- Trans lookup condition
- Lookup reference column
- Lookup on

Ensure that you scan the required table in the Metadata Manager to set trans lookup condition.


Adding Transformation Details

To add business rules graphically, follow these steps:

1. Click the **Graphical Designer** tab.
2. Click .

You can now edit the mapping specification graphically.

3. Click the mapping link of the required column and expand the **Properties** pane.
4. Expand the **Transformation Details** pane.

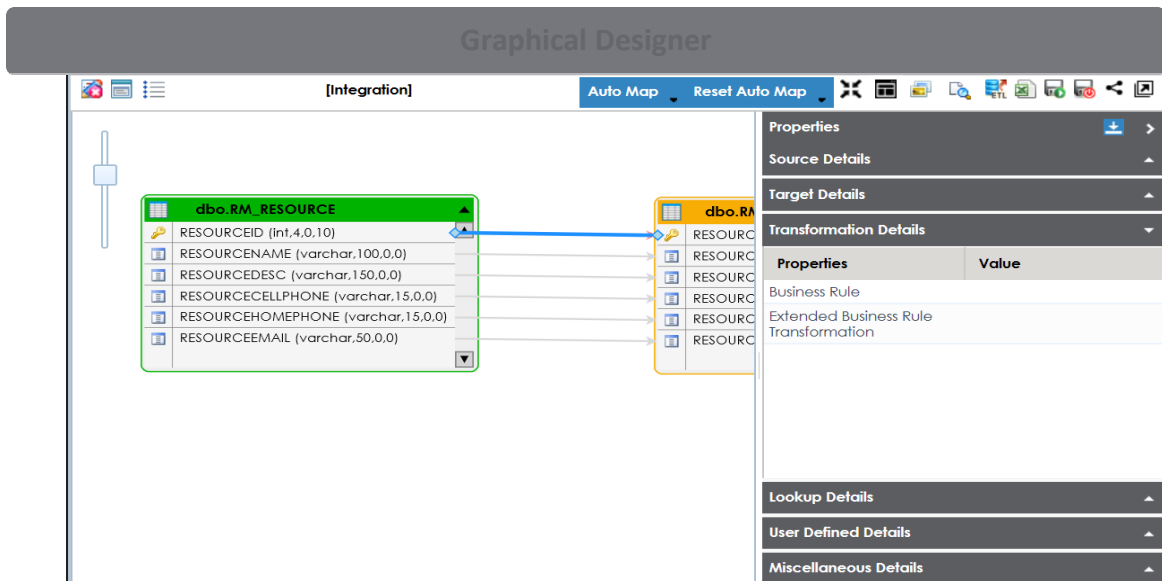

5. Double-click the **Value** cell for **Business Rule** and select the required value.


6. Click .

The business rule is added to the mapping link. You can add business rules for multiple mapping links.

To add extended business rule transformations graphically, follow these steps:


1. On the **Graphical Designer** tab, Click .

The available options appear.

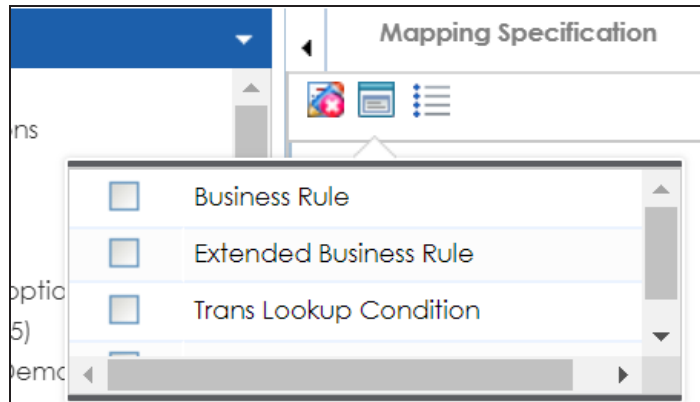


2. Select the **Extended Business Rule** check box.

pane.

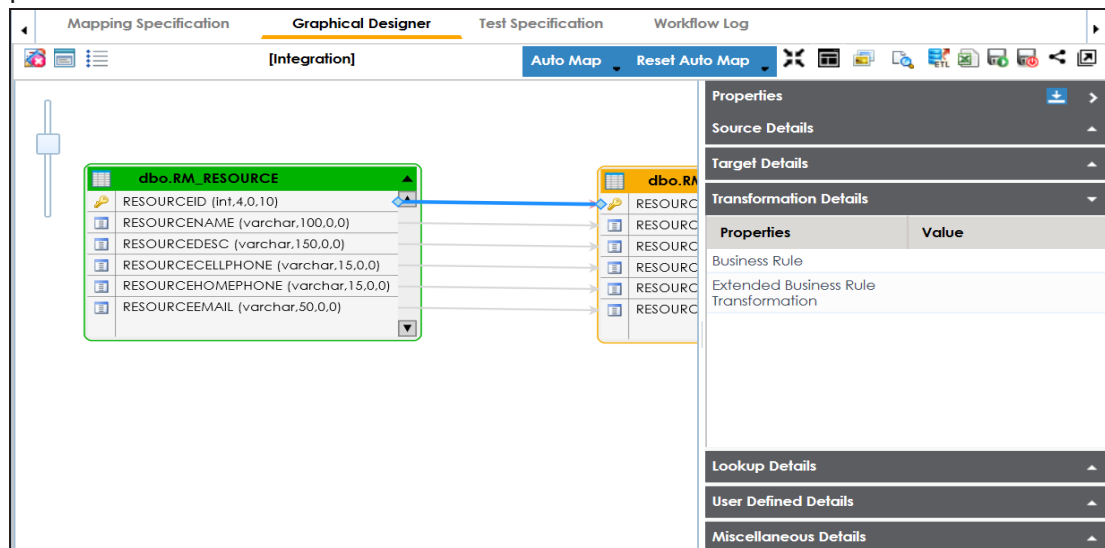


4. Double-click the **Value** cell for **Extended Business Rule Transformation**.

The Extended Transformation Rule Editor appears.

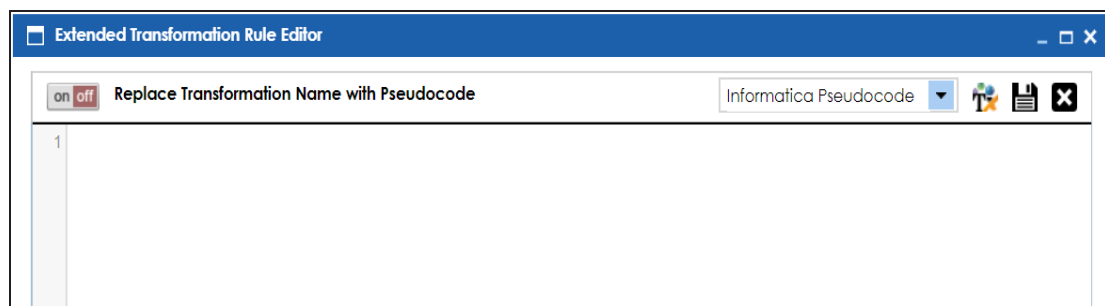


5. Select the pseudocode based on the Project ETL.

For example, if the Project ETL is Informatica then select Informatica Pseudocode.

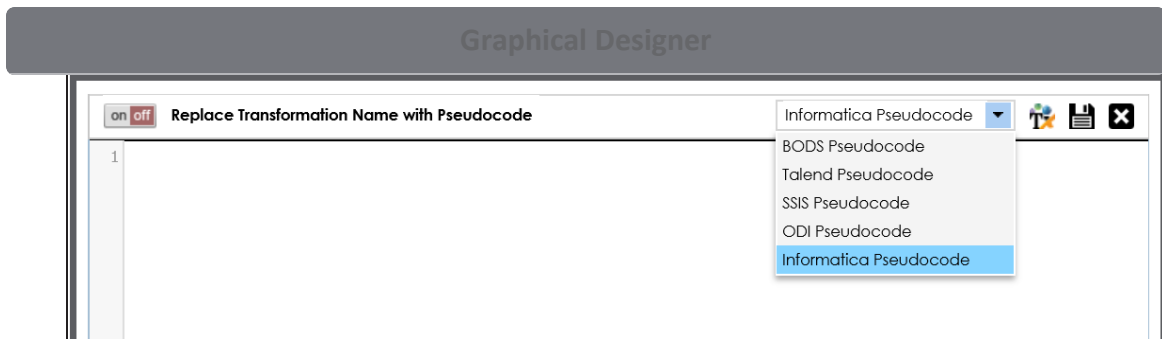

6. Press Ctrl + Space keys.

The available transformations appear.

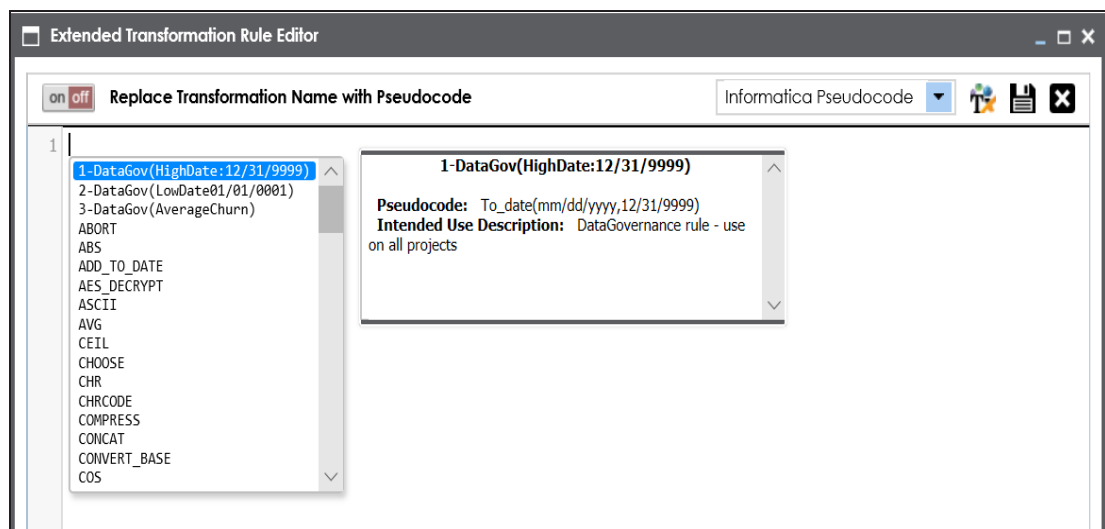

If the required transformation is not available in the list, use  to create and update the transformations list.

7. Double-click the required transformation.

You can use  to replace transformation name with pseudocode.


8. Click .

The extended business rule transformation is added to the mapping link. You can add extended business rule transformations to multiple mapping links.


Adding Lookup Details

To add lookup details graphically, follow these steps:

1. On the **Graphical Designer** tab, click the mapping link of the required column and expand the **Properties** pane.
2. Expand the **Lookup Details** pane.

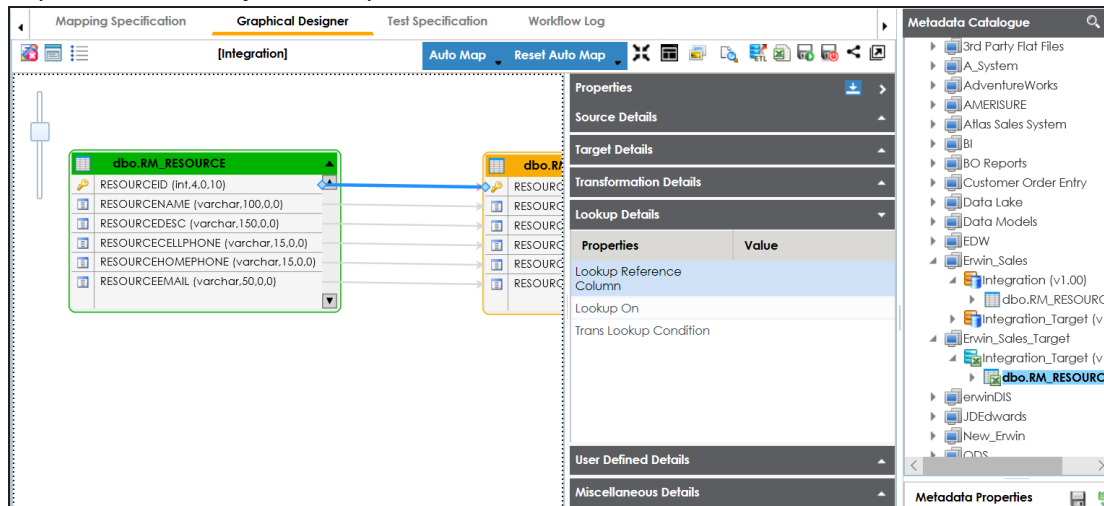


3. Drag the required table from the **Metadata Tree View** pane and drop it for **Trans Lookup Condition**.

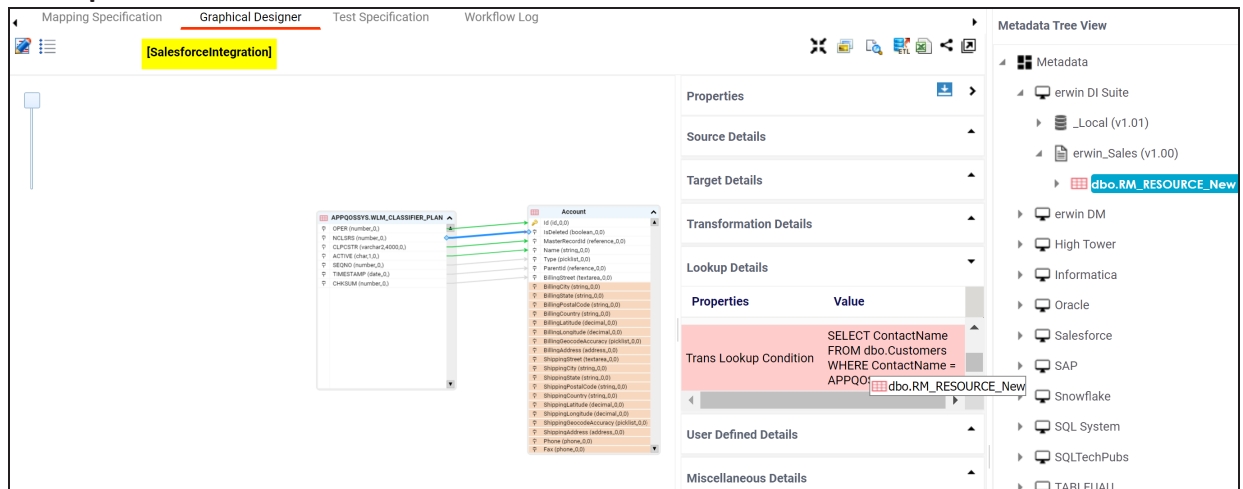

Graphical Designer

on.

To add lookup reference column, double-click the cell for **Lookup Reference Column** and select the required option.

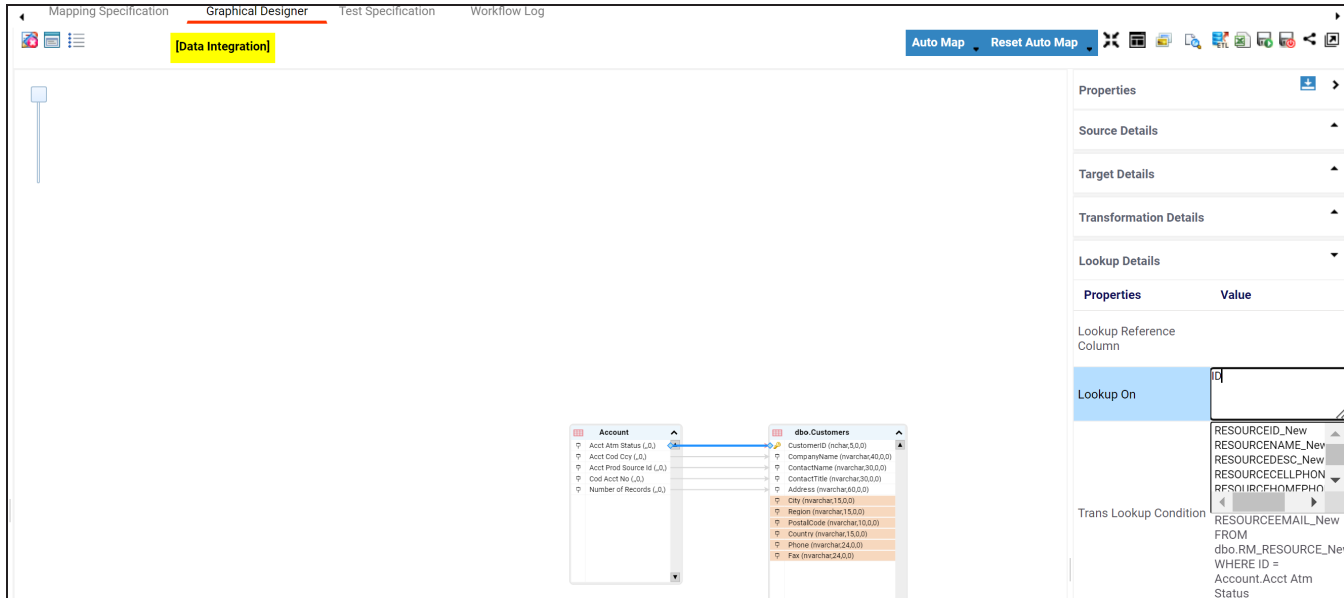

To add lookup on, double-click the cell against **Lookup On** and select the required option.

4. Click .

The lookup details are added to the mapping specification. You can add lookup details for multiple mapping links.


Updating Mapping Specifications Manually

After creating a mapping specification, you can update the mapping specification manually. However, we recommend that you use the manual method case by case on exception basis.

To update mapping specifications manually, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.

By default, it opens the Mapping Specification tab.

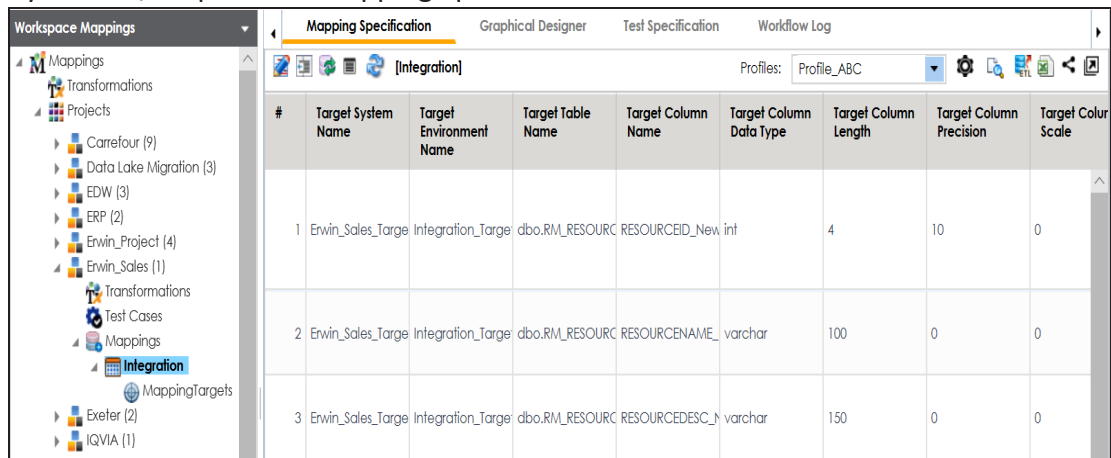

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale
1	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCEID_New	int	4	10	0
2	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCE_NAME	varchar	100	0	0
3	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCEDESC_N	varchar	150	0	0

3. Click .

You can now edit the Mapping Specification grid.

4. Select a row (use Ctrl key to select multiple rows) and right-click the cell.

Updating Mapping Specifications Manually

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale
1	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCEID_New	int	4	10	0
2	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCENAME	varchar	100		
3	Erwin_Sales_Target	Integration_Target	dbo.RM_RESOURCE	RESOURCEDESC_N	varchar	150		

5. Use the following options:

Check All Rows

Use this option to select the check boxes under the Status column for the selected rows.



Right-click the header menu of the mapping specification grid and select the **Status** check box, to make Status column visible in the mapping specification grid.

Uncheck All Rows

Use this option to unselect the check boxes under the Status column for the selected rows.

Clear Source Details

Use this option to clear source details in the mapping specification grid.

Clear Target Details

Use this option to clear target details in the mapping specification grid.

Clear Source & Target Details

Use this option to clear source and target details in the mapping specification grid.

Updating Mapping Specifications Manually

Use this option to clear the cell.

Delete Row(s)

Use this option to delete the selected rows.

Extended Properties

Use this option to configure Extended Properties.

Share Link

Use this option to copy or share the URL of the mapping specification.

To update cell values, double-click a cell and update its values.


Mapping Specification								
Graphical Designer Test Specification Workflow Log								
[Integration] Profiles: Profile_ABC								
#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale
1	Erwin_Sales_Targe	Integration_Targe	dbo.RM_RESOURCE	RESOURCEID_New	int	4	10	0
2	Erwin_Sales_Targe	Integration_Targe	dbo.RM_RESOURCE	RESOURCENAME	varchar	4		
3	Erwin_Sales_Targe	Integration_Targe	dbo.RM_RESOURCE	RESOURCEDESC	varchar			

Uploading Mapping Specifications in XML

You can upload a mapping specification to a project in the XML format. You can either use an existing XML file or export it from a suitable project. Ensure that the XML file follows the correct template. For more information on exporting a mapping specification in XML, refer to the [Proprietary XML Format](#) topic.


To upload mapping specifications in the XML format, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a project.

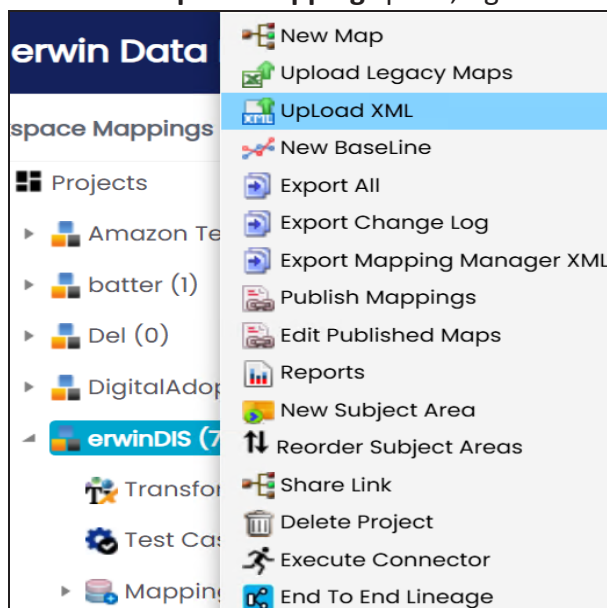


3. Click **Upload XML**.

The Upload Mapping Manager XML page appears.

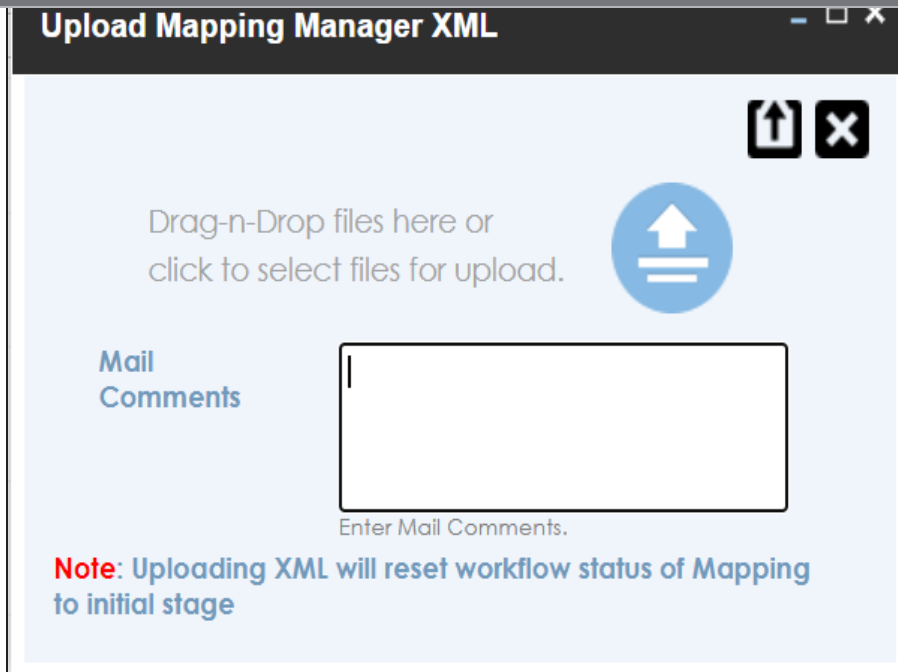

4. Drag and drop or use  to browse and select the XML file.

The Upload Mapping Manager XML page appears.

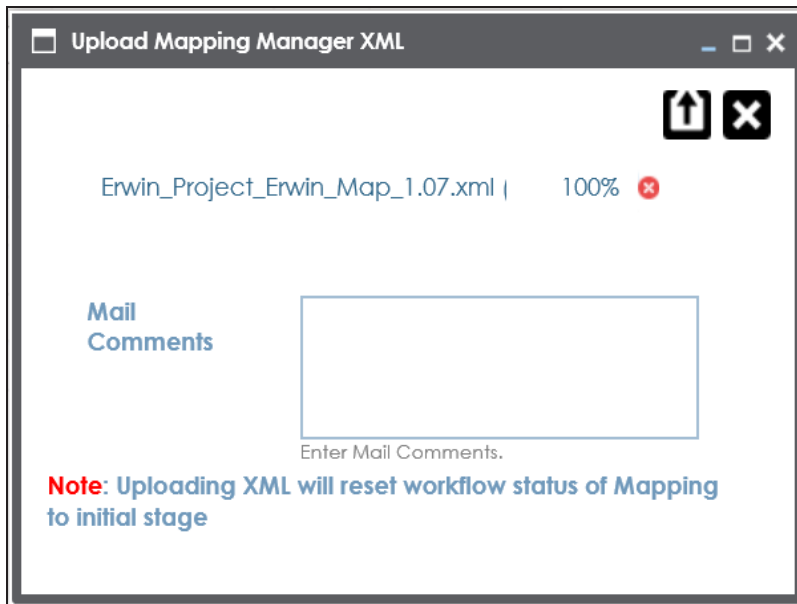

Uploading Mapping Specifications in XML

or Enter Mail Comments and click **OK**.

The Mapping Specification is uploaded successfully.

If you have enabled notifications, project users receive notification emails and mail comments from the administrator's email ID. For more information on configuring notifications, refer to the [Configuring Notifications](#) topic.


Specifying XPath in Mapping Specifications

Xpath is a potential path expression in XML documents. Hence, if you have imported source or target metadata from XSD files then it is important to specify Xpath. You can specify Xpath in a mapping specification for source and target columns.


To specify Xpath in mapping specifications, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.

By default, it opens the Mapping Specification tab.

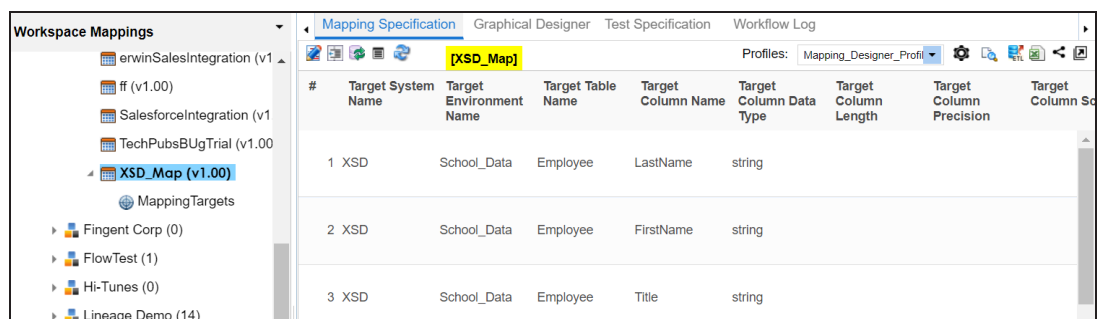

3. Right-click the header menu and select the **Target XPath** and **Source XPath** check boxes.

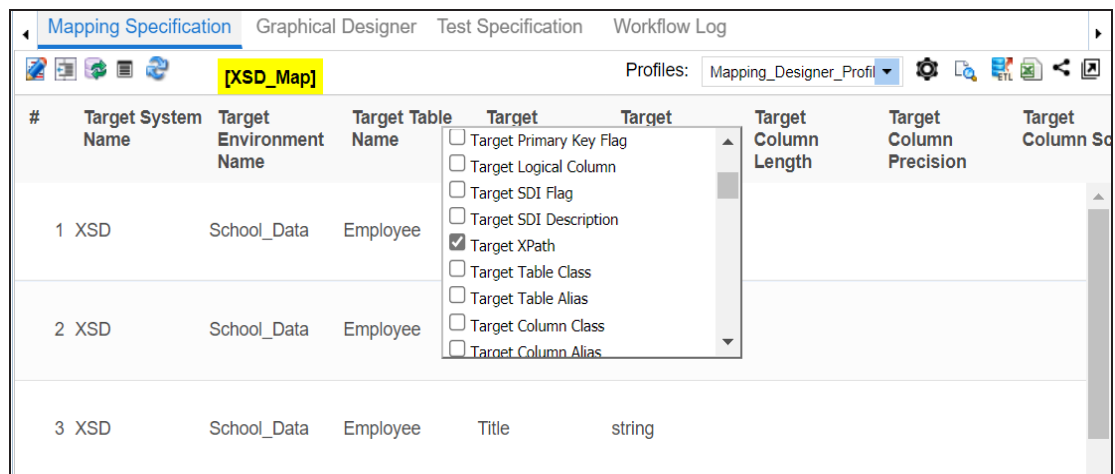

Specifying XPath in Mapping Specifications

cification grid.

4. Click .
5. Double-click cells under the **Target XPath** and **Source XPath** columns to enter the required XPath.
6. Click .

The Xpath is specified in the Mapping Specification.

Mapping Specification									
[XSD_Map]									
me	Target Column Data Type	Target XPath	Source Environment Name	Source Table Name	Source Column Name	Source XPath	Last Modified By	Last Modified	Last Data
	string	./northwind/Empl School_Data	Order	ShipPostalCode	./northwind/Orde	Administrator	2	1	
	string	./northwind/Empl School_Data	Order	ShipName	./northwind/Orde	Administrator	2	1	
	string	./northwind/Empl School_Data	Order	ShipCountry	./northwind/Orde	Administrator	2	1	
	string	./northwind/Empl School_Data	Order	ShipCity	./northwind/Orde	Administrator	2	1	
	string	./northwind/Empl School_Data	Order	ShipAddress	./northwind/Orde	Administrator	2	1	

Setting Column Order and Visibility


You can set the column order and visibility in Mapping Specifications and personalize the Mapping Specification grid. This helps you work efficiently.

Column Order

To set the column order in mapping specifications, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.

By default, the Mapping Specification tab opens.

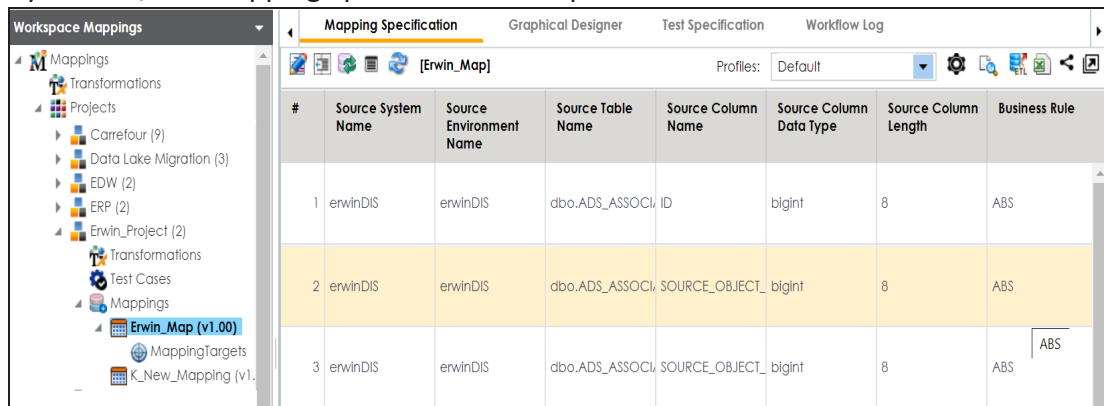

#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	erwinDIS	erwinDIS	dbo.ADS_ASSOCIATION	ID	bigint	8	ABS
2	erwinDIS	erwinDIS	dbo.ADS_ASSOCIATION	SOURCE_OBJECT_ID	bigint	8	ABS
3	erwinDIS	erwinDIS	dbo.ADS_ASSOCIATION	SOURCE_OBJECT_ID	bigint	8	ABS

3. Click the required column header, drag and drop the column at the required place.

The Mapping Specifications can be exported with the new column order.



Column ordering in Mapping Specifications are not saved and gets reset.


Column Visibility

To set the column visibility, follow these steps:

1. In the **Mapping Specification** grid, click .


The Header Menu page appears.

Setting Column Order and Visibility

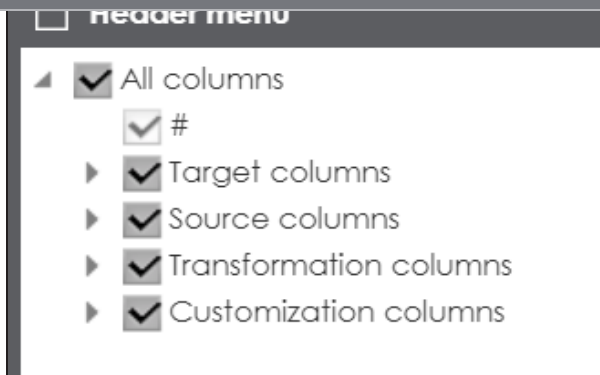

2. Expand the respective nodes.

3. Select the required columns.

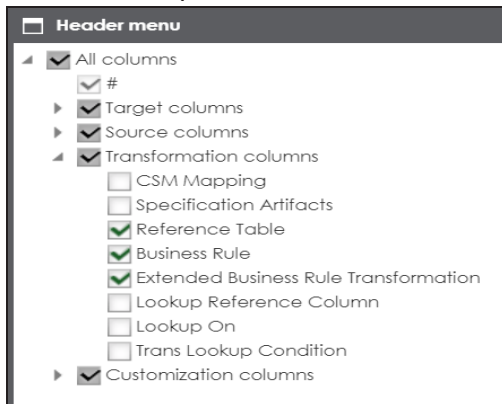

4. Close the **Header Menu** page.

The selected columns are visible in the Mapping Specification grid.

To reset column ordering and visibility click .

Updating Additional Mapping Information

You can update additional mapping information in the Additional Mapping Information pane with respect to the following tabs:

Tab	Description
Map Spec Overview	Under this, you can update the following for a mapping specification: • Specification name • Version label • State name and sub-state name • Source and target metadata sync • Job Name XRef
Source Extract SQL	Under this, you can update: • SQL Query relevant to a mapping specification • SQL Query Description
Target Update Strategy	Under this, you can set your target update strategy as per your data integration requirements.
Testing Notes	Under this, you can add relevant testing notes with respect to a mapping specification.
Map Specs Docs	Under this, you can upload relevant documents.
Assignment	Under this, you can assign a mapping specification to multiple users.
Specification Artifacts	Under this, you can link additional specification artifacts relevant to a mapping specification.
Level of Effort	Under this, you can record planned level of effort and actual level of effort in creating mapping and ETL process.
Change Log	This tab can be enabled in Mapping Manager Settings . Under this, you can capture change logs of a mapping specification.
Release Inform-	Under this, you can view release information of a mapping.

Updating Additional Mapping Information	
Tab	Description
ation	
My Action Center	Under this, you can collaborate with other users on a task.
User Defined Tabs (1-5)	There are five user defined tabs that can be used by you with your own UI labels .
Extended Properties	Under this, you can extend properties of a mapping specification by creating custom forms.

To access the Additional Mapping Information pane, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.

The central pane displays the Mapping Specification grid. The Additional Mapping Information pane is available at the bottom of the central pane.

The screenshot shows the Mapping Manager interface. At the top, there are tabs for 'Mapping Specification', 'Graphical Designer', 'Test Specification', and 'Workflow Log'. Below these is a toolbar with various icons and a 'Profiles' dropdown set to 'Mapping_Designer_Profil'. The main area is a table with the following columns: '#', 'Target System Name', 'Target Environment Name', 'Target Table Name', 'Target Column Name', 'Target Column Data Type', 'Target Column Length', 'Target Column Precision', 'Target Column Scale', and 'Target Column Nu'. The table contains four rows of data for 'SQLTechPubs' and 'dbo.Categories'. Below the table is a pagination bar showing 'Records from 1 to 4', 'Page 1', and '100 rows per page'. At the bottom, there is an 'Additional Mapping Information' pane with tabs for 'Map Spec Overview', 'Source Extract SQL', 'Target Update Strategy', 'Testing Notes', and 'Map Spec Docs'. The 'Map Spec Overview' tab is currently selected.

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nu
1	SQLTechPubs	SQLTechPubs	dbo.Categories	CategoryID	int	4	10	0	
2	SQLTechPubs	SQLTechPubs	dbo.Categories	CategoryName	nvarchar	15	0	0	
3	SQLTechPubs	SQLTechPubs	dbo.Categories	Description	ntext	16	0	0	
4	SQLTechPubs	SQLTechPubs	dbo.Categories	Picture	image	16	0	0	

3. Click the **Additional Mapping Information** pane.

You can use ◀ or ▶ to navigate across the pane.

Updating Additional Mapping Information

[Bug Trial]
Profiles: Mapping_Designer_Profil

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Number
Records from 1 to 4 Page 1 100 rows per page									

Additional Mapping Information

Map Spec Overview

Source Extract SQL

Target Update Strategy

Testing Notes

Map Spec Docs

Map Id

98

Workflow Status

Preliminary Draft

Specification Name

Bug Trial

Map Specification Version

1.00

Version Label

State Name

Approved

Sub State Name

Sync Source Metadata

OFF

Sync Target Metadata

OFF

Job Name XRef

Updating Map Spec Overview

You can update the Map Spec Overview tab and update various aspects of a mapping specification that includes:

- Specification name and its description
- Version label
- Mapping states and sub-states
- Syncing metadata with a mapping specification
- Job name XRef

To update the Map Spec Overview tab, follow these steps:

1. In the **Additional Mapping Information** pane, on the **Map Spec Overview** tab, click .

Updating Map Spec Overview

Map Spec Overview
Source Extract SQL
Target Update Strategy
Testing Notes

Map Id

Specification Name

Map Specification Version

Version Label

State Name

Sync Source Metadata

Job Name XRef

Mapping Description

Assigned To

Created By

Modified By

Bug Trial

Approved ▼

☒ ON

Workflow Status Preliminary Draft

Select ▼

☒ ON

A H | **B** *I* U | | |

Testing for a bug logged by QA

Administrator Created Date Time 2020-06-08 10:24:06.843

Administrator Modified Date Time 2021-04-22 08:11:29.353

2. Select or enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Specification Name	Specifies the mapping specification name. For example, EDW_PROD_IDS_Benefits_Detail. For more information on naming conventions, refer to the Best Practices section.
Version Label	Specifies the version label of the mapping specification. For example, EDW_PROD_IDS_Benefits_Detail (Alpha). For more information on configuring version display of maps, refer to the Configuring Version Display topic.

Mapping Management Guide 15.0

164

Updating Map Spec Overview

Field Name	Description
State Name	Specifies the mapping state of the mapping specification. For example, In Progress. For more information on configuring mapping states, refer to the Configuring Mapping State Settings topic.
Sub State Name	Specifies the sub-state of the mapping specification. For example, Needs Approval. For more information on configuring mapping sub-states, refer to the Configuring Mapping State Settings topic.
Sync Source Metadata	Switch Sync Source Metadata to ON to sync source metadata with the mapping specification.
Sync Target Metadata	Switch Sync Target Metadata to ON to sync target metadata with the mapping specification.
Job Name XRef	Specifies the equivalent ETL mapping name. For example, ErwinDIS931.
Description	Specifies the description for the mapping specification. For example: This is a map between EDW source and IDS target systems.



You cannot edit Map Id, Workflow Status, and Map Specification Version.

For more information on workflow status, refer to the [Managing Mapping Manager Workflows](#) topic.

3. Click .

The fields on the Map Spec Overview tab are updated.


Updating Source Extract SQL

You can keep a record of multiple source extract SQL and its description. You can also update it as per your requirements.


To update source extract SQL, follow these steps:

1. In the **Additional Mapping Information** pane, click the **Source Extract SQL** tab.

The Source Extract SQL tab appears.

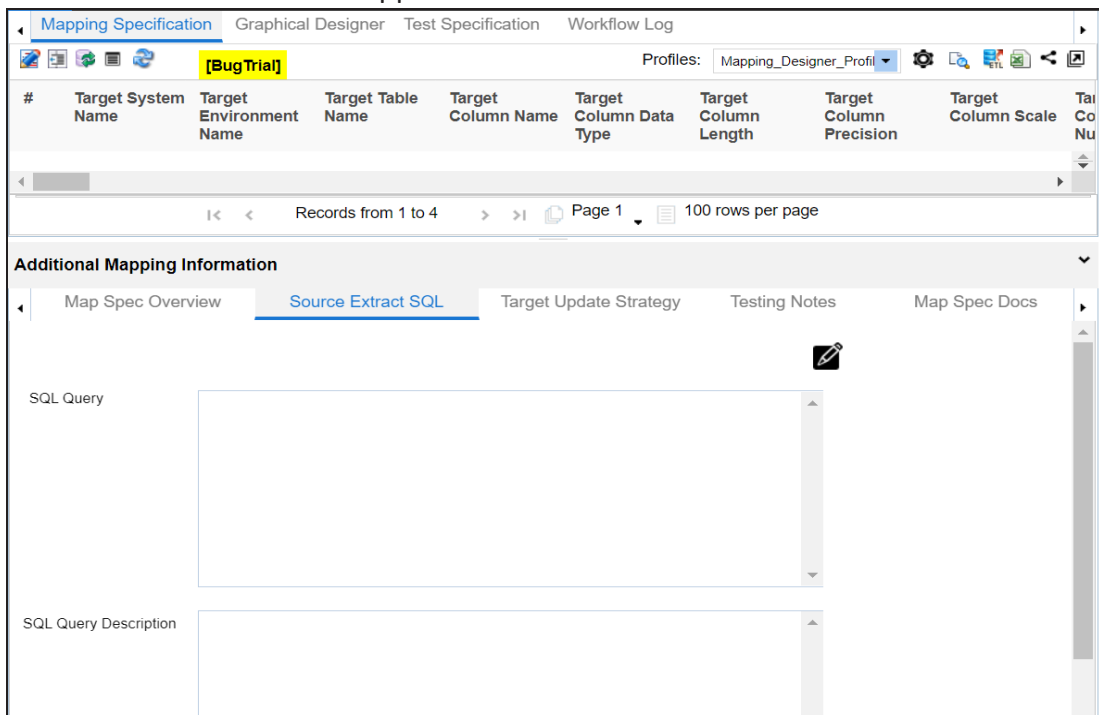

2. click .

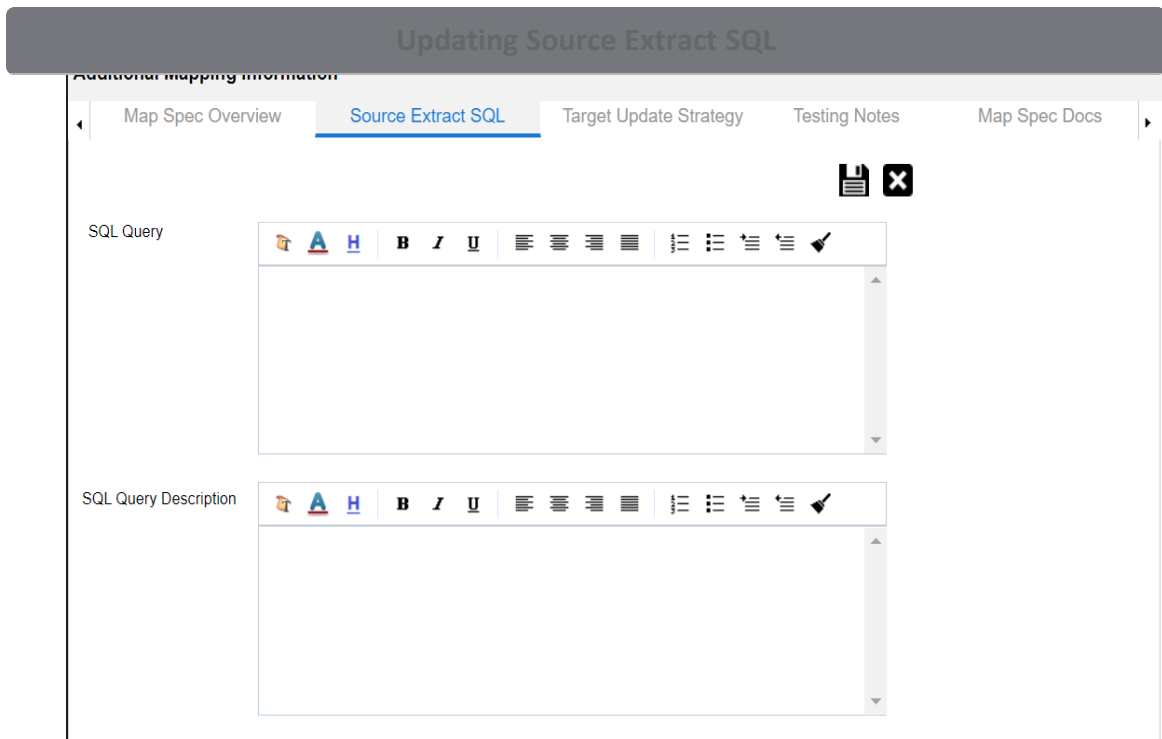

3. Enter **SQL Query** and **SQL Query Description**.

For example:

- **SQL Query:** Select * from dbo.RM_Resource
- **SQL Query Description:** - The query extracts the data from dbo.RM_Resource table.

4. Click .


The Source Extract SQL is updated.

Setting Target Update Strategy


You can set the way target metadata is updated when you map source to target. You can update the strategy any time as per your requirement.

To set target update strategy, follow these steps:

1. In the **Additional Mapping Information** pane, click the **Target Update Strategy** tab.

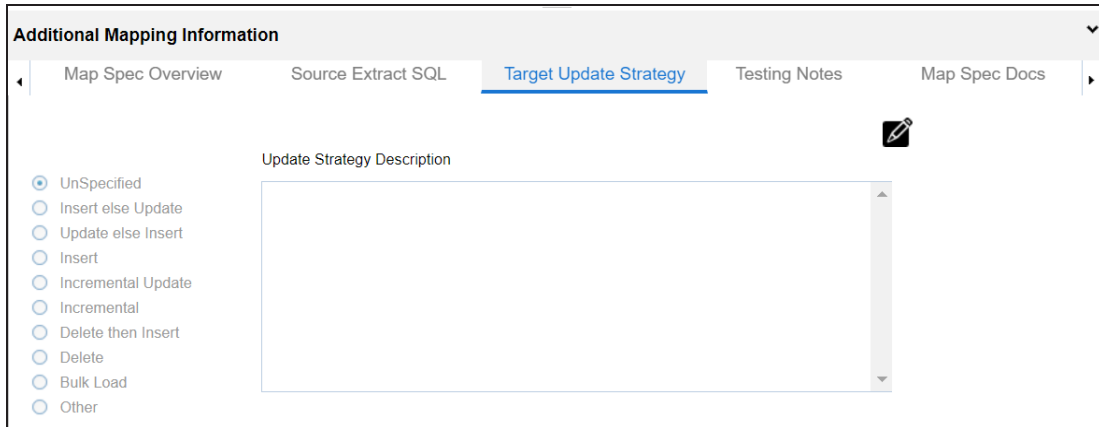

2. Click .

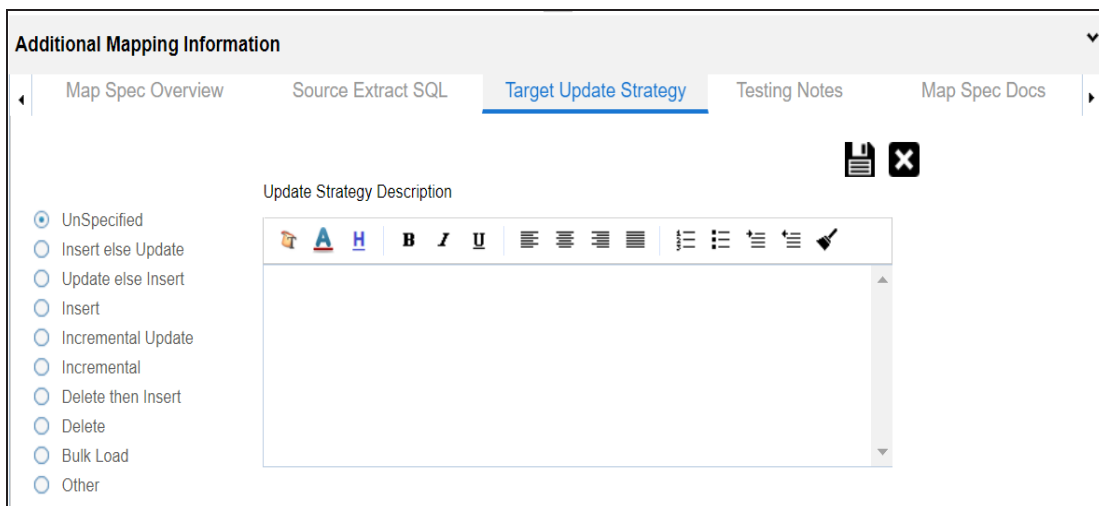

3. Click the appropriate update strategy from the options and enter **Update Strategy Description**.

For example:

Setting Target Update Strategy

Update Strategy Description: Insert the source column value to a blank target column else update the target column value with the source column value.

4. Click .

The Target Update Strategy is set.


Updating Testing Notes

You can keep a record of testing notes related to a mapping specification and specify test results as:


- Un-specified
- Pass
- Fail
- Needs analysis

To update testing notes, follow these steps:

1. In the **Additional Mapping Information** pane, click the **Testing Notes** tab.

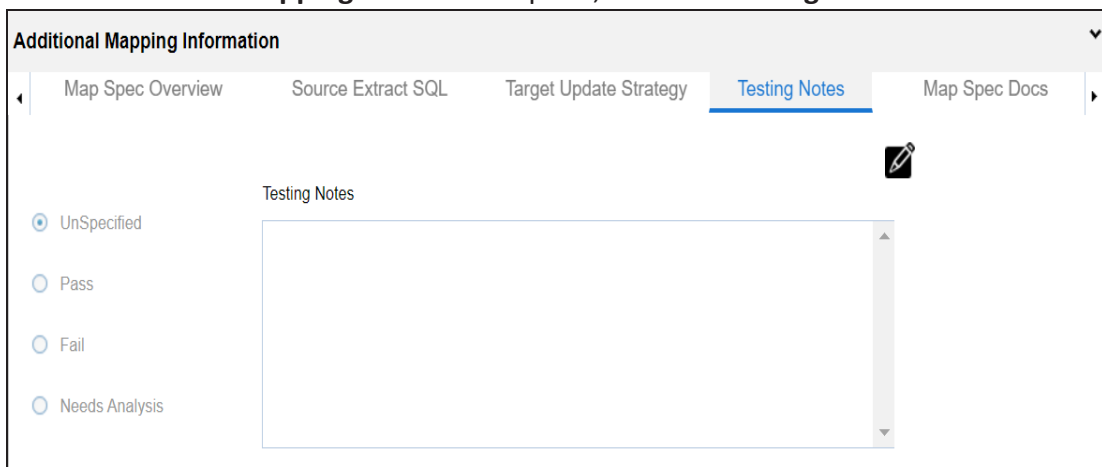

2. Click .

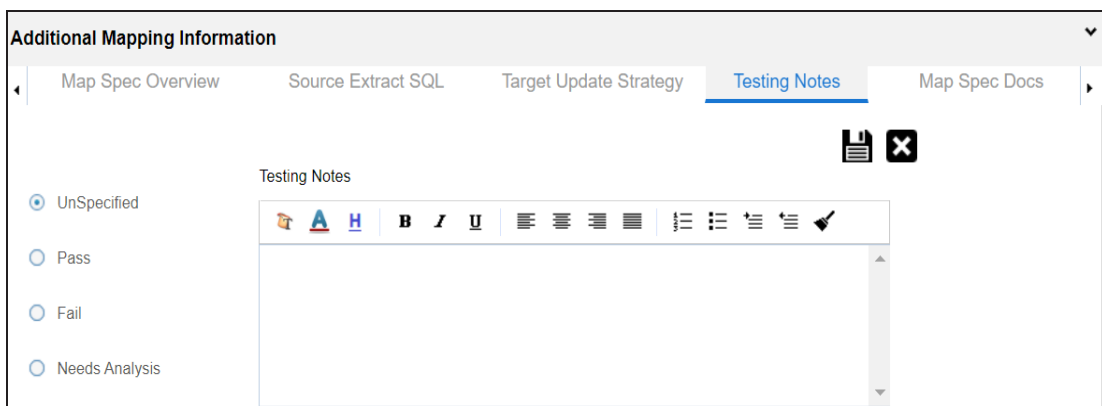

Updating Testing Notes

For example:

- **Test results:** Pass
- **Testing Notes:** The mapping specification passed the testing and it is ready for the ETL process.

4. Click .

The Testing Notes are updated.

Adding Mapping Specification Documents

You can add supporting documents, such as text files, audio files, video files, document links, and so on to a mapping specification.

To upload mapping specification documents, follow these steps:

1. In the **Additional Mapping Information** pane, click the **Map Spec Docs** tab.

Additional Mapping Information

Target Update Strategy Testing Notes **Map Spec Docs** Assignment Specification Artifacts

#	Document Name	Document Link	Document Status	Intended Use Description	Options
					+

2. Click .

Additional Mapping Information

Target Update Strategy Testing Notes **Map Spec Docs** Assignment Specification Artifacts

#	Document Name	Document Link	Document Status	Intended Use Description	Options
	Document Name*	Document Owner		Document Object Drag-n-Drop files here or click to select files for upload. Intended Use Description	 
		Document Link		Approval Required Flag ☐	

3. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Adding Mapping Specification Documents

Field Name	Description
Document Name	Specifies the name of the physical document being attached to the mapping specification. For example, Mapping Details.
Document Object	Drag and drop document files or use  to select and upload document files.
Document Owner	Specifies the document owner's name. For example, John Doe.
Document Link	Specifies the URL of the document. For example, https://drive.google.com/file/d/2sC2_SZlyeFKI7OOOn-b5YkMBq4ptA7jhg5/view
Description	Specifies the description of the document. For example: The document has information about the mapping details.
Approval Required Flag	Specifies whether the document requires approval. Select the Approval Required Flag check box to select the document status.
Document Status	Specifies the status of the document. For example, In Progress. Select the status of the document from the drop down. This field is available only when the Approval Required Flag check box is selected.

- Click .

The mapping specification document is added.

Assigning Mapping Specifications to Users


You can assign a mapping specification to your team members in the following capacities:

- Mapping Designer
- Mapping Approver
- Mapping ETL Developer
- Mapping Tester

By default, the user that creates the mapping specification is the Mapping Designer. You can re-assign another user as the Mapping Designer.

To assign mapping specifications to users, follow these steps:

1. In the **Additional Mapping Information** pane, click the **Assignment** tab.

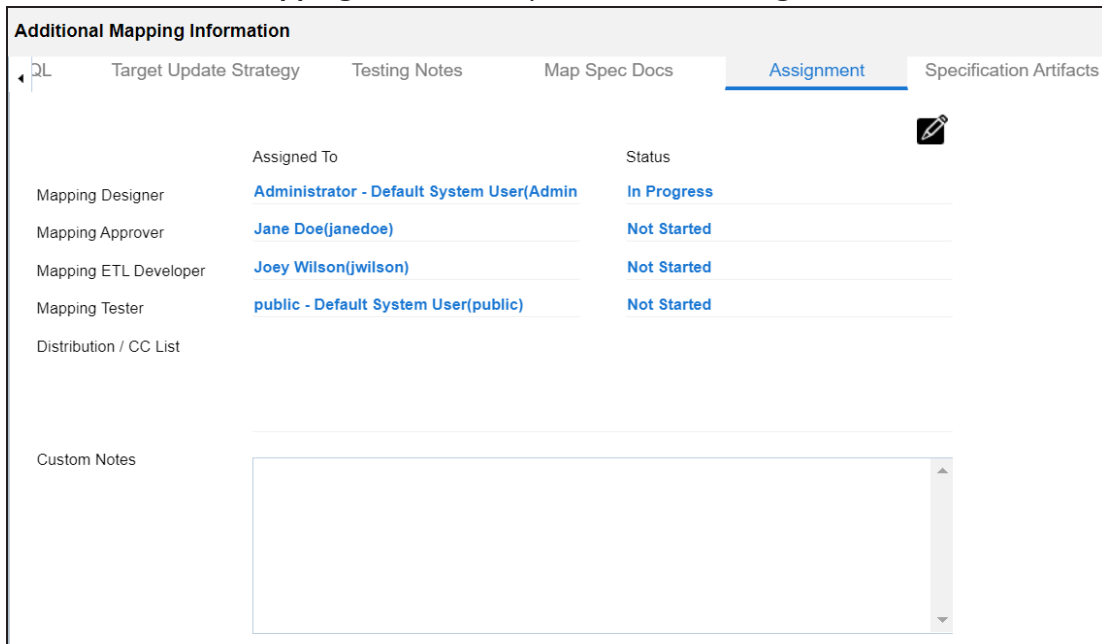

Additional Mapping Information		
	Target Update Strategy	Testing Notes
	Map Spec Docs	Assignment
		Specification Artifacts
	Assigned To	Status
Mapping Designer	Administrator - Default System User(Admin)	In Progress
Mapping Approver	Jane Doe(janedoe)	Not Started
Mapping ETL Developer	Joey Wilson(jwilson)	Not Started
Mapping Tester	public - Default System User(public)	Not Started
Distribution / CC List		
Custom Notes		

2. Click .

Assigning Mapping Specifications to Users

QL
Target Update Strategy
Testing Notes
Map Spec Docs
Assignment
Specification Artifacts

Email ☐

	Assigned To	Status	
Mapping Designer	Administrator - Default System User(Administ	In Progress	☐
Mapping Approver	Jane Doe(janedoe)	Not Started	☐
Mapping ETL Developer	Joey Wilson(jwilson)	Not Started	☐
Mapping Tester	public - Default System User(public)	Not Started	☐
Distribution / CC List			☐

Custom Notes

Assignment changes

3. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Mapping Designer	Specifies the User Full Name and User ID of the Mapping Designer. For example, Jane Doe(janedoe).
Mapping Approver	Specifies the User Full Name and User ID of the Mapping Approver. For example, John Doe(jdoe).
Mapping ETL Developer	Specifies the User Full Name and User ID of the Mapping ETL Developer. For example, John Denver(jdenver).
Mapping Tester	Specifies the User Full Name and User ID of the Mapping Tester. For example, Michael Samuel(M.Samuel).

Assigning Mapping Specifications to Users

Field Name	Description
Status	Specifies the status of the user's task. For example, Pending Review.
Email	The Email check boxes populate as you select corresponding users. Select the check boxes to send email notifications to the corresponding users about the mapping assignment and change in mapping status. For more information on configuring email notifications, refer to the Configuring Notifications topic.
Distribution/CC List	Enter a comma-separated list of email IDs that should receive the email notification about the assignment. For example, ab.dav@xyz.com, cal.kai@xyz.com The email notification is sent from the administrator's email ID .
Custom Notes	Specifies custom notes about the mapping assignment. For example: John Denver is the Mapping ETL Developer of the mapping specification.
Assignment Changes	Specifies the changes in the mapping assignment. The information in this field is system-generated. For example: User Administrator - Default System User(Administrator) has been assigned to the mapping on 2020-01-12 19:58:15.815.

4. Click .


The mapping specification is assigned to the users.

Linking Additional Specification Artifacts

The Requirements Manager captures functional requirements of a data integration project using Specification Artifacts. You can link these specification artifacts with mapping specifications.

To link specification artifacts with mapping specifications, follow these steps:

1. In the **Additional Information** pane, click the **Specification Artifacts** tab.

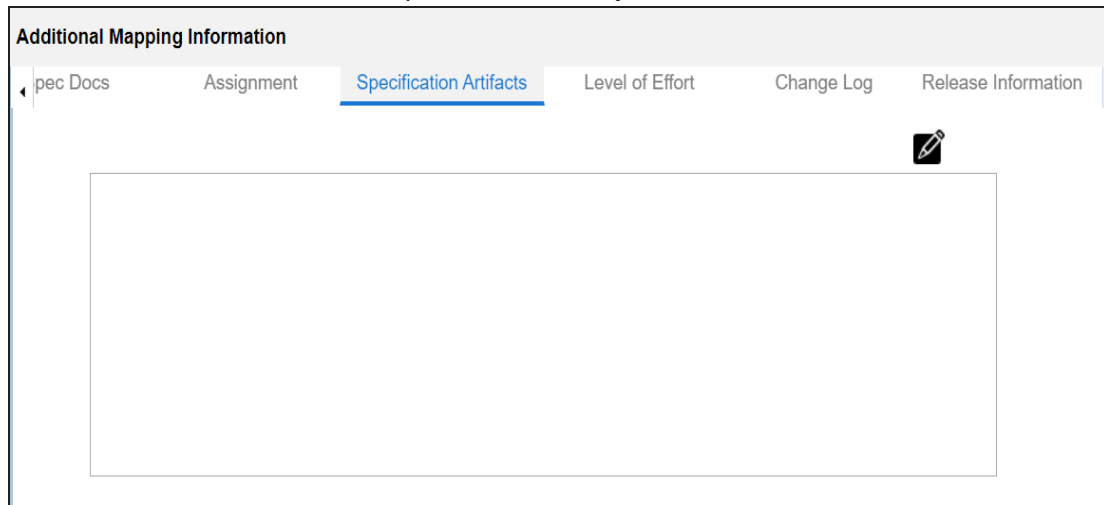


2. Click .



Linking Additional Specification Artifacts

the required specification under the **Specification Artifacts** tab.

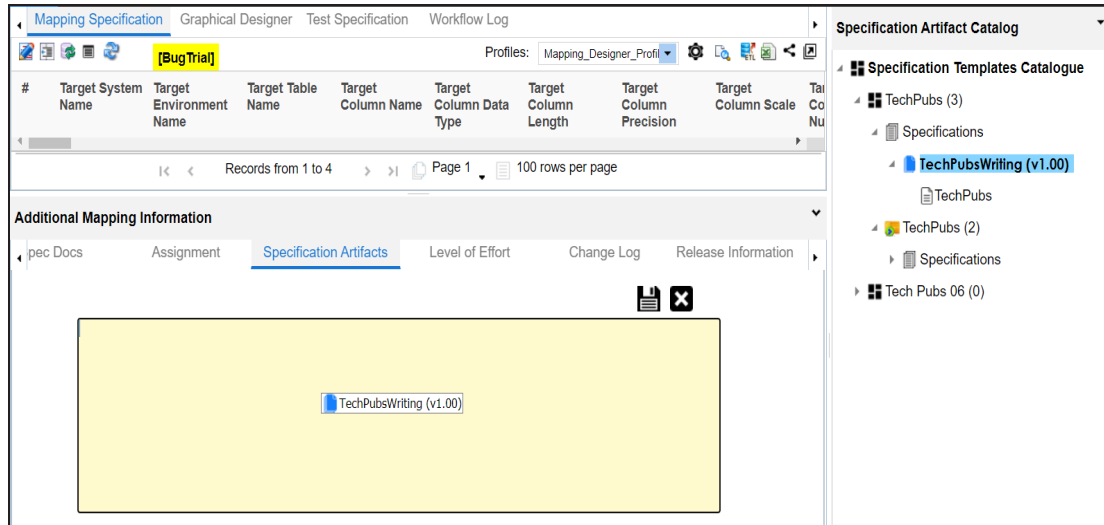

4. Click .

The specification artifact is linked.

Recording Level of Effort

You can record and compare planned level of effort with the actual level effort spent on creating and managing mapping specifications.

To record the level of effort, follow these steps:

1. In the **Additional Mapping Information** pane, click the **Level of Effort** tab.

2. Click .

3. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Sub-Fields	Description
Planned Level of Effort	Mapping Effort	Specifies the planned mapping effort in days. For example, 10.5 days.

Recording Level of Effort		
Field Name	Sub-Fields	Description
	ETL Effort	Specifies the planned ETL effort in days. For example, 10.5 days.
	Notes	Specifies notes about the planned level of effort. For example: Planned level of effort took all the project requirements into account.
Actual Level of Effort	Mapping Effort	Specifies the actual mapping effort in days. For example, 9.5 days.
	ETL Effort	Enter the actual ETL effort in days. For example, 9.5 days.
	Notes	Specifies the notes about the actual level. For example: Actual level of effort were lesser than the planned level of effort.

4. Click .

The level of effort tab is recorded.

Viewing Change Logs

A change log is a record of changes made in a Mapping Specification grid. You can view these changes on the Change Log tab. By default, this tab is disabled. You can enable it under Change Log Settings. For more information, refer to the [Configuring Change Log Settings](#) topic.

To view the change logs of the mapping specifications, in the **Additional Information** pane, click the **Change Log** tab.

The change logs of the mapping specification appears.

The screenshot shows the Mapping Specification grid with the **Change Log** tab selected in the **Additional Mapping Information** pane. The grid displays the following data:

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable
1	SQLTechPubs	SQLTechPubs	dbo.Categories	CategoryID	int	4	10	0	

Records from 1 to 4 | Page 1 | 100 rows per page

Additional Mapping Information

#	Log Id	Changed Log Description	Map Version	Last Modified By	Last Modified Date Time
1	58		1.00	Administrator	2020-08-27 14:13:23.08
2	43	Trial for bug testing	1.00	Administrator	2020-06-08 10:28:46.793
3	42	Testing the flow for a bug.	1.00	Administrator	2020-06-08 10:26:50.783

Viewing Release Information

The release, migration, and audit-related information of a mapping specification are available on the Release Information tab. For more information on releases, refer to the [Release Manager](#) section.

To view release information of mapping specifications, in the **Additional Mapping Information** pane, click the **Release Information** tab.

The release information of the mapping specification appears.

Additional Mapping Information

Spec Docs

Assignment

Specification Artifacts

Level of Effort

Change Log

[Release Information](#)

Release Details

Release

DeltaRelease

Project

ErwinSales

Status

PENDING APPROVAL

Owner

Administrator

Migration Details

From

DEV

To

DEV

Live Date

06/18/2021 HH:MM AM/PM

Migration Date

06/18/2021 HH:MM AM/PM

Audit Details

Created By

Administrator

Created Date

06/18/2021

Last Modified By

Administrator

Last Modified Date

06/18/2021


Adding Tasks

To collaborate on mappings you can create tasks depending on your requirement. By default, you can create to-do tasks, access requests, or issues. Apart from these task types, you can configure custom task types via [Task Type Configuration](#).

To add tasks, follow these steps:


1. In the **Additional Mapping Information** pane, click the **My Action Center** tab.

The My Action Center tab opens. It displays a list of all tasks related to the map.

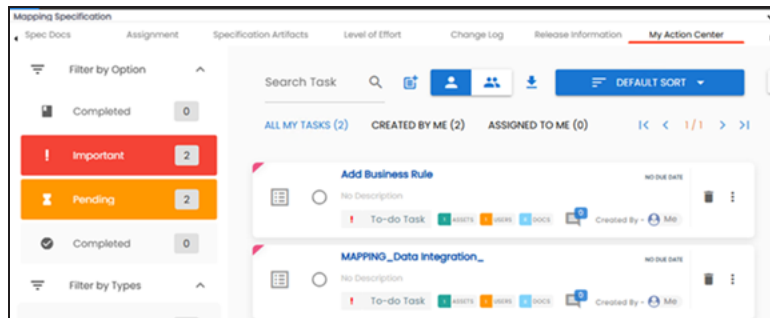

2. Click .

A list of task types appears.

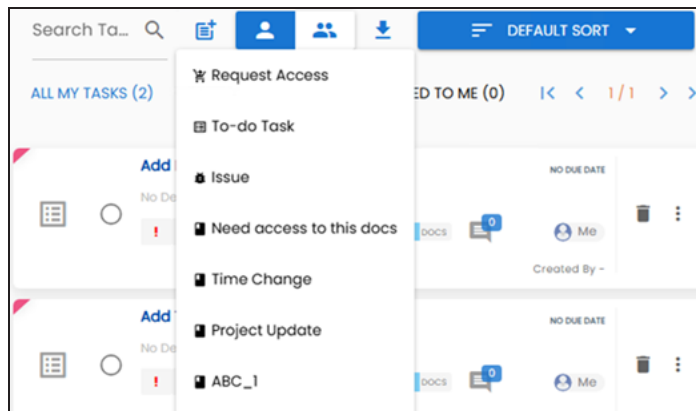

3. Click the required task type.

The Create New Task page appears.

Adding Tasks

Create New Task

TASK DETAILS

Task is being created on Asset

Data Integration

MAPPING

With Task Type as

To-do Task

Name

MAPPING_Data Integration_

25 / 200

Description

0 / 5

Important

YES

NO

Due

Assign Users

Richard Cooper

External user emails

Hit the ENTER key to add a new Email

Self Help

- Enter appropriate values in the fields. Refer to the following table for field descriptions.

Field Name	Description
Task is being created on Asset	Specifies the asset for which the task is created. This field autopopulates with the map name.
With Task Type as	Specifies the task type. For example, To do Task.

Adding Tasks

Field Name	Description
Name	Specifies the name of the task. By default, it autopopulates with a name in the following format: Mapping_<Map_Name>. You can edit it and rename the task. For example, Test Mappings.
Description	Specifies a description of a task. For example: Test all the mappings and record the effort required.
Important	Specifies whether the task is important
Due	Specifies the due date of the task. Use  to set the due date.
Assign Users	Specifies the users assigned to the task. You can assign DI and BU users from the list. For example, Richard Cooper.
External user emails	Specifies the email ID of external users. For example, chris.harris@quest.com

5. Click .

The task is created and saved. Use  to edit the task details and attach relevant documents.

Chat

Use the Chat tab to send messages to the assigned and external users of a task.

On the **Chat** tab, enter your message in the text box and use the following options:


Assigned

Use this option to send messages to the assigned users.

External Users

Use this option to send messages to external users.

Users are notified via Messaging Center.

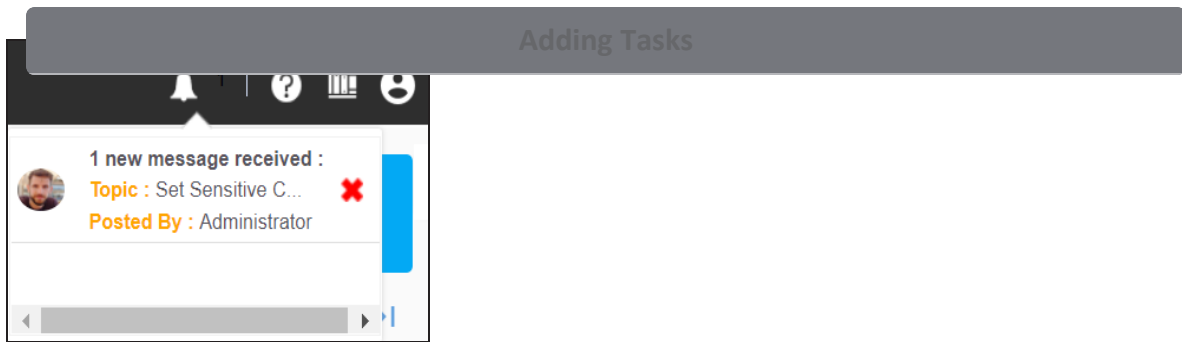

You can manage a task using the options available on the task list. [Managing a task](#) involves:

- Marking tasks complete
- Viewing task details
- Editing task details
- Disabling notifications
- Downloading Chat
- Sharing chat
- Marking tasks as pending
- Deleting tasks

With the My Action Center tab, you can filter and search tasks based on its status and assignments. For more information on search and filter mechanisms, refer to the [Filter and Search](#) topic.


Configuring Task Types

With My Action Center, you can configure task types to collaborate on miscellaneous tasks. By default, three task types, To-Do Task, Request Access, and Issue are available. These task types cannot be edited or deleted.

To add custom task types, follow these steps:

1. In the utility section, click .

The Task Type Configuration pane appears and displays a list of available task types.

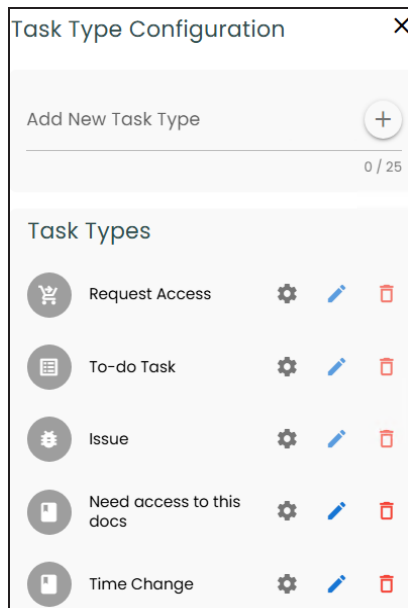


2. In the Add New Task Type box, enter a new task type and then click .

The task type is added to the list of available tasks.

For example, in the following image, a task type, Schedule Job is added.

Configuring Task Types

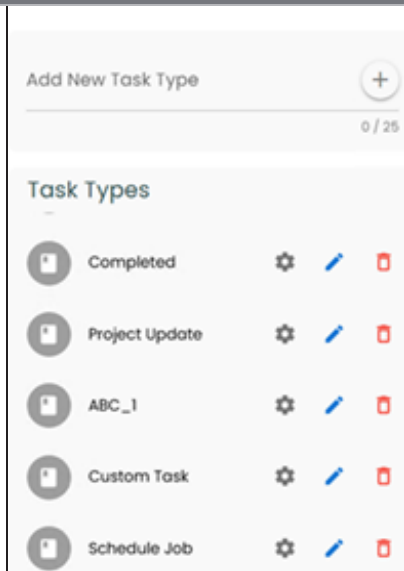

Use the following options to manage task types:

Configure Task Type ()

Use this option to [configure task types](#).

Edit ()

Use this option to edit task types.

Delete ()


Use this option to delete task types.

To configure task types, follow these steps:

1. Click .

The Task Type Configuration page appears. By default, the Extended Properties tab opens.

Configuring Task Types

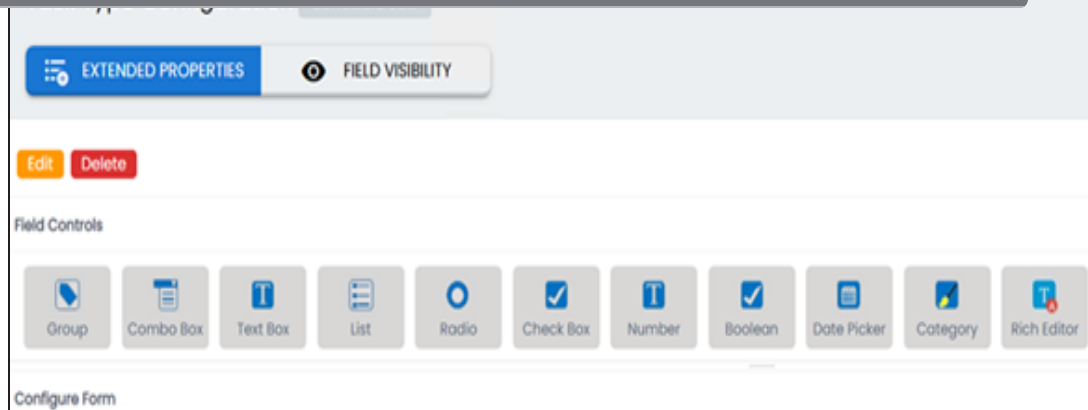

The Extended Properties tab contains the following sections:

- **Field Controls:** This pane displays the available UI elements.
- **Configure Form:** Use this pane to design forms using the UI elements available in the Field Controls pane.
- **Configure Form:** Use this pane to view and edit the properties of the UI element selected in the Configure Form pane.

2. Click **Edit**.
3. Double-click or drag and drop the required UI elements from the Field Controls pane to the Configure Form pane.
4. Select the required UI element one at a time and edit their properties in the Properties pane.

Configuring Task Types

EXTENDED PROPERTIES

FIELD VISIBILITY

Save

Cancel

Delete

Field Controls

Group

Combo Box

Text Box

List

Radio

Check Box

Number

Boolean

Date Picker

Category

Rich Editor

Configure Form

List

Configure Form

Property	Value
Published	ON
Field	List
Type	List
Dependencies	Type or click here
Configure Values	Configure
Mandatory	OFF
Description	

Note: Double click on the field cell to update the field name

 The available properties differ based on the type of UI element.

Refer to the following table for property descriptions:

Property	Description
Published	Switch the Published option to ON to publish the field.
Field	Specifies the field label. To change the field labels, double-click the corresponding Value cell. For example, List.
Type	Specifies the type of the field. To select field types, double-click the corresponding Value cell. For example, List.
Dependencies	Defines the pick list fields that can be used as controlling fields. It

Configuring Task Types	
Property	Description
	works only with the Reference Data Manager connector. To define pick list fields, select the fields from the drop down list.
Configure Values	Specifies the connectors for the field. To enter option values, click Configure . Use the following options: ▪ Default Connector: Use this option to enter option values manually or using an MS Excel file. ▪ Reference Data Manager: Use this option to pull option values from reference tables in the Reference Data Manager.
Mandatory	Specifies whether the field is mandatory. Switch the Mandatory option to ON to make this field mandatory in a form.
Description	Specifies the field description. To enter field descriptions, double-click the corresponding Value cell.
Order	Specifies the order of the field on the Extended Properties tab. To enter the order number, double-click the corresponding Value cell. You can also drag and move fields in the Configure Form pane to change their order.

3. Click **Save**.

The form is saved and available on the Extended Properties tab.

To configure field visibility, follow these steps:

1. Click the **Field Visibility** tab. It displays the default fields available for the task type.

Configuring Task Types

The screenshot shows a configuration window titled 'Configuring Task Types'. It has two tabs: 'EXTENDED PROPERTIES' and 'FIELD VISIBILITY'. The 'FIELD VISIBILITY' tab is active. Below the tabs is an orange 'EDIT' button. A list of fields is displayed, each with a blue toggle switch to its right. The fields are: Description, Assign Users, Requestor, External user emails, Comments, Attachments & URLs, Type, and Important. All toggle switches are currently turned on.

2. Click **Edit**.
3. To make fields visible, switch on the required fields.
4. Click **Save**.

The fields are configured.

Default Connector


When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the default connector to import option values from an MS Excel file or enter them manually.

To configure option values using the default connector, follow these steps:

Ensure that you are in edit mode.


2. In the **Properties** section, click **Configure**.

The Connectors page appears.

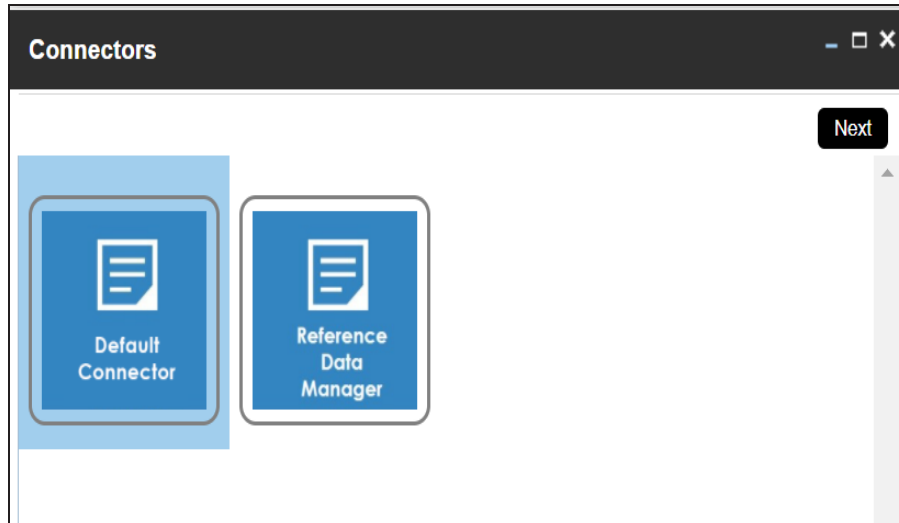

3. On the **Connectors** page, ensure that the Default Connector option is selected. Then, click **Next**.

The <UI_Element> Options page appears. For example, if the UI element is Combo Box, the Combo Box Options page appears.

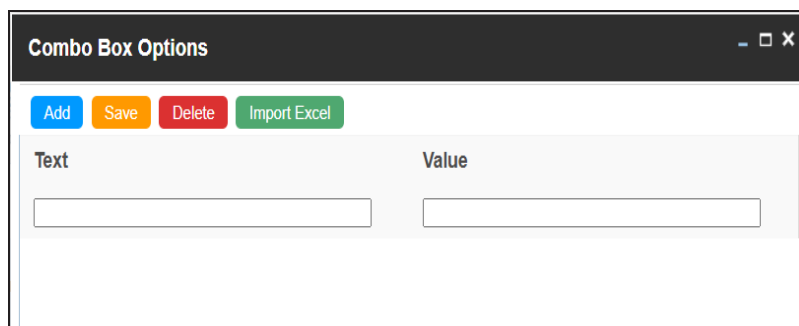

Add

Use this option to enter text and value manually.

Import Excel

Use this option to import options from MS Excel files.

5. After configuring option values, click **Save**.

To add option values manually, follow these steps:


1. Click **Add**.
2. Enter values in the Text and Value fields.

The Text corresponds to options whereas the Value corresponds to underlying value of an option. You can add as many values as needed.

Text	Value
Data Steward_GER	rcooper
Data Steward_ROM	vsmith

3. Click **Save**.

Configuring Task Types

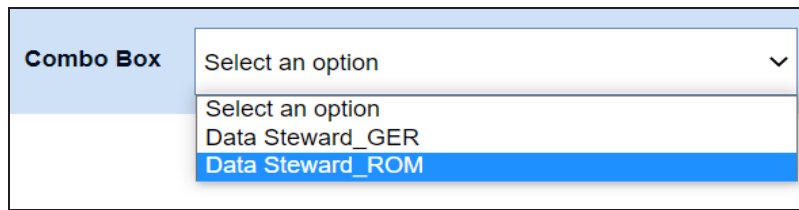


A screenshot of a web interface showing a 'Combo Box' with a dropdown menu. The dropdown menu is open, displaying four options: 'Select an option' (twice), 'Data Steward_GER', and 'Data Steward_ROM'. The 'Data Steward_ROM' option is highlighted in blue.

To import option values from MS Excel files, follow these steps:

1. Click **Import Excel**.

The Upload Excel page appears.

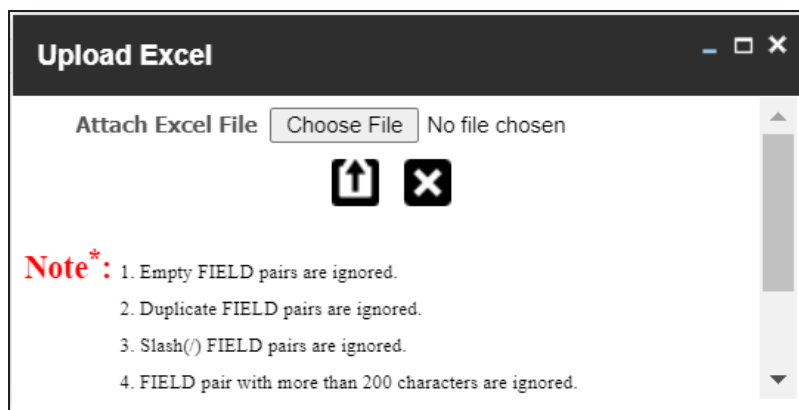

A screenshot of the 'Upload Excel' page. The page has a dark header with the title 'Upload Excel' and window control buttons. Below the header, there is a section 'Attach Excel File' with a 'Choose File' button and the text 'No file chosen'. There are two icons: an upward arrow and a cross. Below this, there is a 'Note*' section with four bullet points: '1. Empty FIELD pairs are ignored.', '2. Duplicate FIELD pairs are ignored.', '3. Slash(/) FIELD pairs are ignored.', and '4. FIELD pair with more than 200 characters are ignored.'

2. Click **Choose File** and select the required MS Excel file.

The Upload Excel page appears. It displays the data in the MS Excel file.

Configuring Task Types

#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards	Data Steward_GER	mmannigan
2	Data Stewards	Data Steward_GER	mmenza
3	Data Stewards	Data Steward_GER	mmannigan

- Double-click the **Select Column To Import** cell in the required column.

The available options appear.

#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import FIELD VALUE Clear Selection	Select Column To Import
1	Data Stewards	Data Steward_GER	mmannigan


- Select the appropriate option.

Field corresponds to options and Value corresponds to value of an option. You can import multiple columns. Use Clear Selection to undo the selection.

- Click .

The <UI_Element> Options page appears. It displays the imported columns. You can delete a row that is not required. To delete rows, click a row and then click **Delete**.


Configuring Task Types

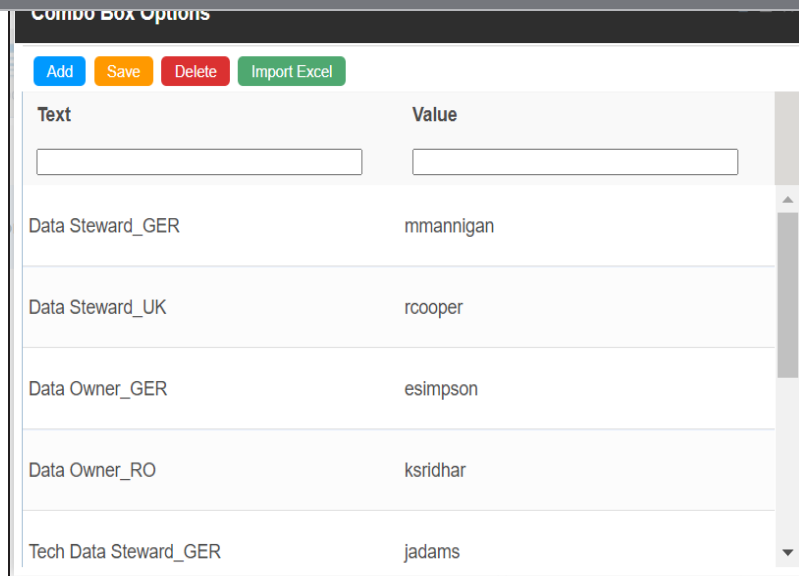

Text	Value
Data Steward_GER	mmannigan
Data Steward_UK	rcooper
Data Owner_GER	esimpson
Data Owner_RO	ksridhar
Tech Data Steward_GER	jadams

6. Click **Save**.

The option values appear in the UI element under the Configure Form section.

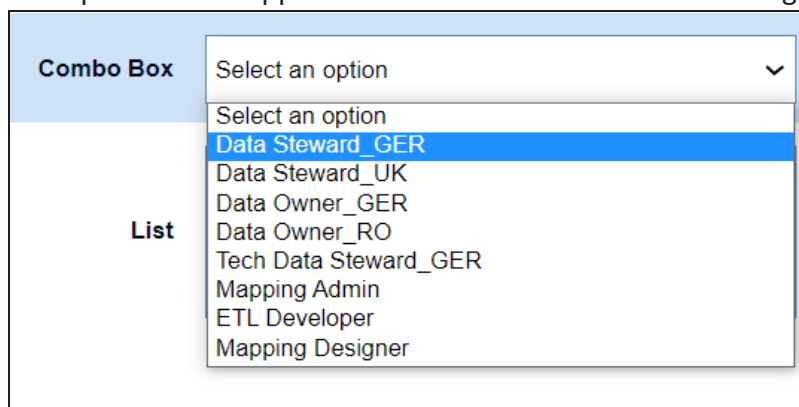

Combo Box

Select an option ▼

List

- Select an option
- Data Steward_GER
- Data Steward_UK
- Data Owner_GER
- Data Owner_RO
- Tech Data Steward_GER
- Mapping Admin
- ETL Developer
- Mapping Designer

Reference Data Manager

When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the Reference Data Manager connector to import option values from tables in the Reference Data Manager.


steps:

1. In the **Configure Form** section, click the required UI element.

Ensure that you are in edit mode.


2. In the **Properties** section, click **Configure**.

The Connectors page appears.

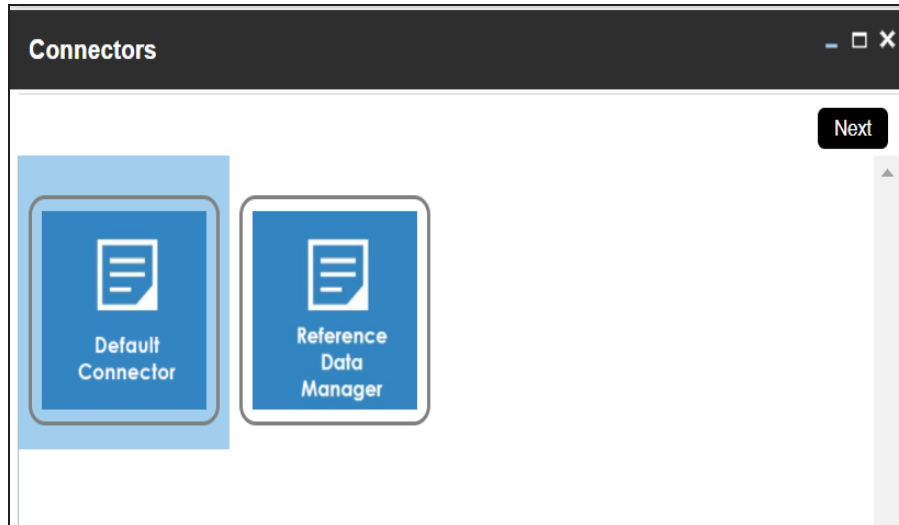


3. On the **Connectors** page, click **Reference Data Manager** and then click **Next**.

The Reference Data Manager page appears. It displays the reference folders in the Connector View pane.

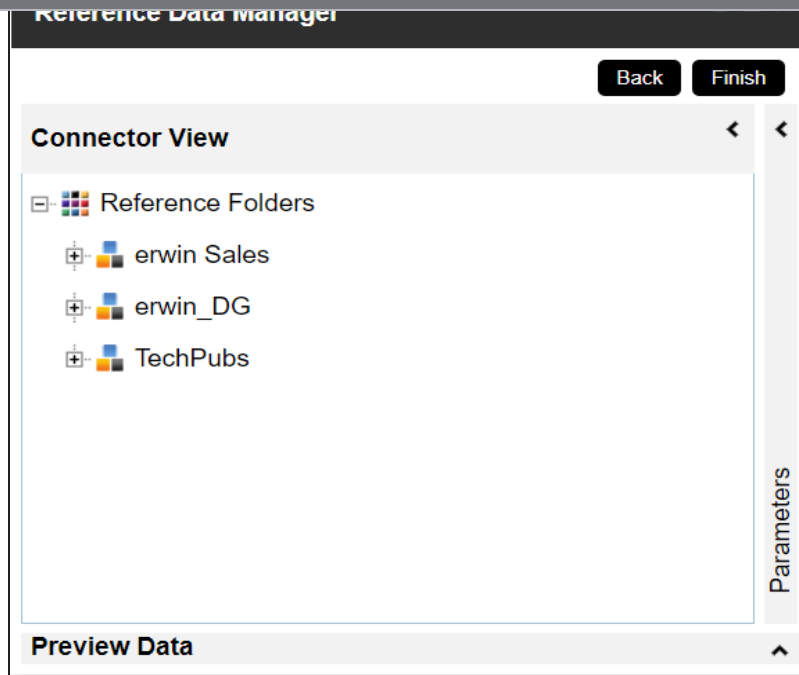

4. In the **Connector View** pane, expand a reference folder and select a reference table.

The Parameters pane displays the columns in the reference table. You can also click Preview to view the data in the reference table.

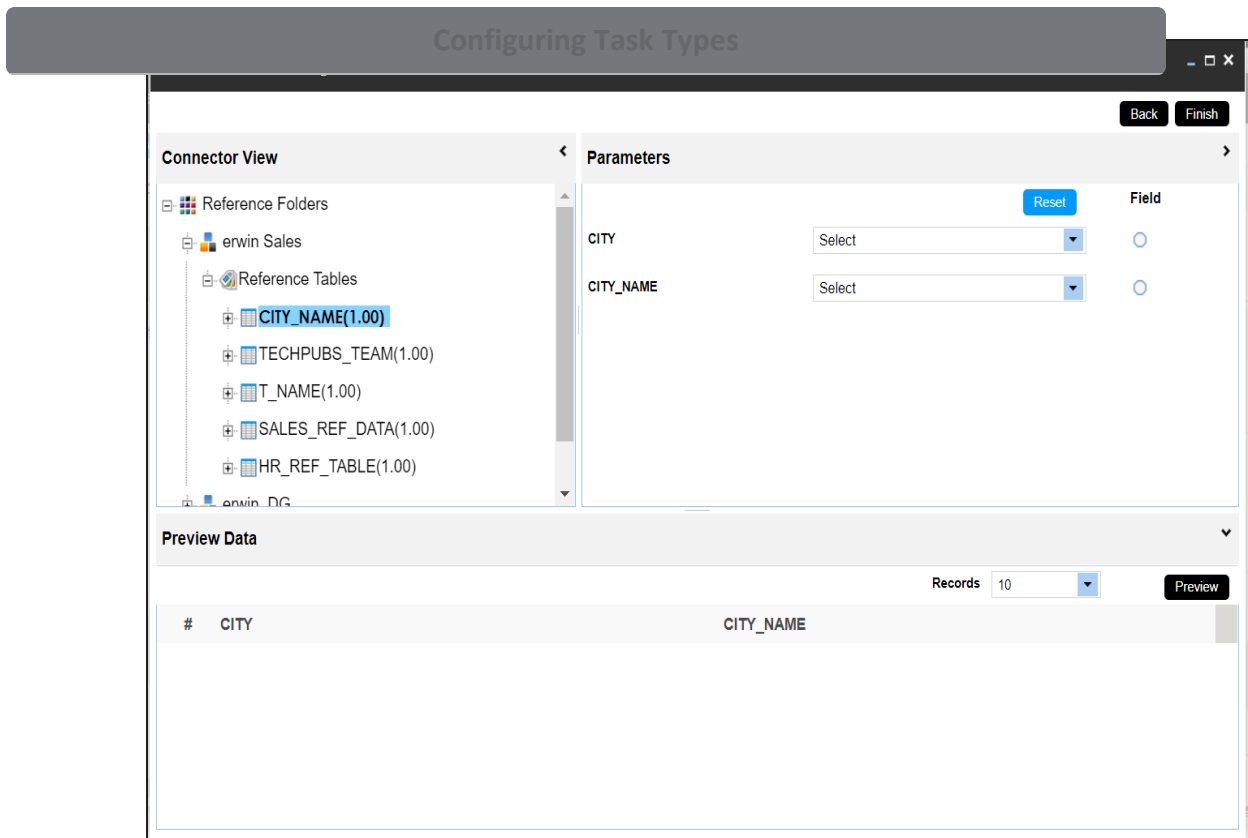

5. In the **Parameters** pane, click the radio button next to the required column.
You can select the controlling field from the drop down option. Ensure that you define the required dependencies in the Properties pane and that the option values for controlling field are configured using the same reference column.
6. Click **Finish**.
The Extended Properties Configuration page appears.

Configuring Task Types

The screenshot shows the 'Configuring Task Types' interface. At the top, there are 'Save', 'Cancel', and 'Delete' buttons. Below them is the 'Field Controls' section with icons for Group, Text Box, Combo Box, List, Radio, Check Box, Number, Boolean, Date Picker, and Category. The 'Configure Form' section on the left shows a form with a 'Selected Roles Group' dropdown set to 'Compliance Officer' and a 'List of Cities' dropdown with options 'Mumbai', 'Los Angeles', and 'New Delhi'. A 'Radio' button is at the bottom. The 'Properties' section on the right has a table with 'Property' and 'Value' columns. The 'Load On Startup' property is set to 'Off' and the 'Visible in Extended Properties' property is set to 'On'.

Property	Value
Description	
Load On Startup	Off
Visible in Extended Properties	On

7. Under the **Properties** section, switch **Load on Startup** to **ON**.
8. Click **Save**.

The option values are configured. For example, in the following form the List of Cities is the controlling field for Selected City. Both the fields get their option values from the same reference column.

The screenshot shows the 'Configure Form' interface with the following fields: 'Governance Responsibilities' (dropdown set to 'Compliance Officer'), 'Selected Roles Group' (dropdown set to 'Compliance Officer'), 'List of Cities' (dropdown with options 'Mumbai', 'Los Angeles', 'New Delhi'), and 'Selected City' (radio button set to 'Los Angeles').

Managing Tasks


Managing tasks involves:

- Marking tasks complete
- Viewing task details
- Editing task details
- Disabling notifications
- Downloading Chat
- Sharing chat
- Marking tasks as pending
- Deleting tasks

To mark tasks complete, on the task list, for the required task, click the radio button.

The task is moved to the list of completed task.

For example, in the following image, the task, Add Business rule is marked complete.

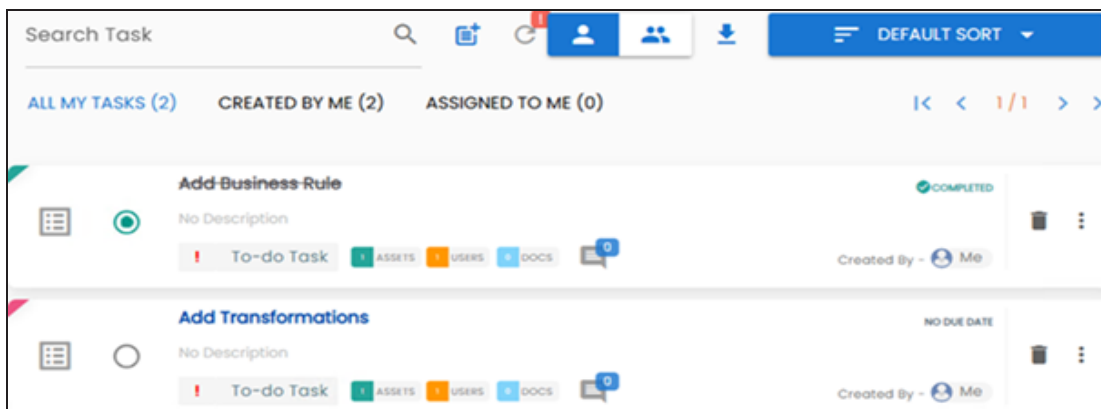


To manage tasks, follow these steps:

1. In the task list, for the required task, click ⋮.

The available options appear.

Managing Tasks

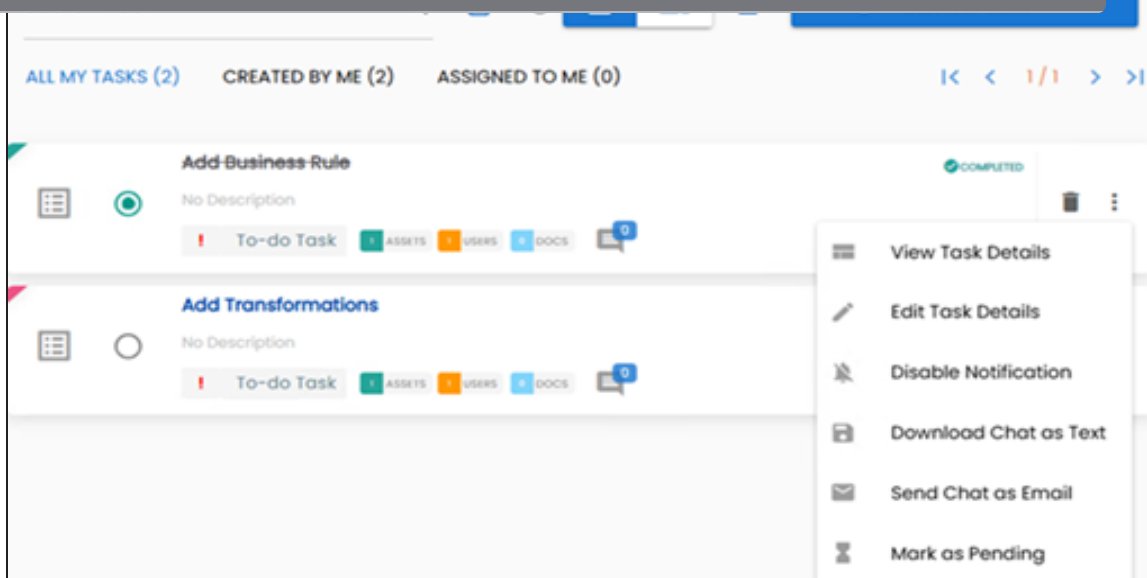

2. Use the following options to work on tasks:

View Task Details

Use this option to view task details. These details include task name, description, assigned assets, attached documents, and so on.

Edit Task Details

Use this option to update task details.

Disable Notification

Use this option to stop receiving notifications related to a task. By default, notifications are enabled, and users assigned to task receive notifications.

Download Chat as Text

Use this option to download chat related to a task in the TXT format.

Send Chat as Email

Use this option to share the chat related to a task via an email. Click **Send Chat as Email**.

The Email Selection page appears. It displays a list of users assigned to the task.

Managing Tasks

☐	Select All	
	Administrator	☐
	rcooper	☐
	lmichal	☐

Select the required users, and then click . An email is sent to the selected users.

Mark as Pending

This option is available for a completed task. Use this option to mark a task as pending.

To delete a task, in the task list, for the required task, click .



You can delete a task only if you have created the task.

Configuring Extended Properties

You can configure user-defined properties of a mapping specification under the **Extended Properties** tab.

First, you need to set up a form and then use it to configure the user-defined extended properties.

To configure extended properties of mapping specifications, follow these steps:

1. In the **Additional Mapping Information** pane, click the **Extended Properties** tab.

Additional Mapping Information

User Defined1 User Defined2 User Defined3 User Defined4 User Defined5 **Extended Properties**

Configure Edit Delete Import From Excel Export To Excel

Form Values

No Data Found

2. Click **Configure**.

Extended Properties Configuration

Edit Delete

Field Controls

Group Text Box Combo Box List Radio Check Box Number Boolean Date Picker Category

Configure Form

Radio

Text Box

Combo Box Select an option

Module Links

Resource Manager <https://erwin.com/bookshelf/10.2D/ISBookshelf/Conte>

Metadata Manager <https://erwin.com/bookshelf/10.2D/ISBookshelf/Conte>

Properties

Property	Value
Published	ON
Field	Radio
Type	Radio
Configure Values	Configure
Description	
Visible in Extended Properties	ON

Configuring Extended Properties

- **Field Controls:** Use this pane to get the required UI elements.
 - **Configure Form:** Use this pane to design forms using the UI elements available in the **Field Controls** pane.
 - **Properties:** Use this pane to view the properties of the UI element selected in the **Configure Form** pane.
3. Click **Edit**. Then, double-click or drag and drop the required UI elements from the **Field Controls** pane to the **Configure Form** pane.
 4. Select UI elements, one at a time, and configure their properties in the **Properties** pane.

Extended Properties Configuration

Field Controls

Text Box, Check Box, Number, Boolean, Date Picker, Category, Rich Editor

Configure Form

Check Box ☐

Rich Editor

Configure Form

Property	Value
Published	ON
Field	Rich Editor
Type	Rich Editor
Dependencies	Type or click here
Configure Values	Configure
Mandatory	OFF
Regular Expression	

Note: 1. Double click on the field cell to update the field name
2. Select the field name to update its properties



The available properties differ based on the type of UI element.

Refer to the following table for property descriptions:

Property	Description
Published	Switch Published to ON to publish the field.

Configuring Extended Properties

Property	Description
Field	Specifies the field label. To change the field labels, double-click the corresponding Value cell. For example, Mapping Specification Approved On.
Type	Specifies the type of the field. To select field types, double-click the corresponding Value cell. For example, Date Picker.
Dependencies	Defines the pick list fields that can be used as controlling fields. It works only with the Reference Data Manager connector. To define pick list fields, select the fields from the drop down option.
Configure Values	Specifies the connectors for the field. To enter option values, click Configure Values. Use the following options: ▪ Default connector: Use this option to enter option values manually or using an MS Excel file. ▪ Reference Data Manager : Use this option to pull option values from reference tables in the Reference Data Manager.
Mandatory	Specifies whether the field is mandatory.
Description	Specifies the field description. To enter field descriptions, double-click the corresponding Value cell.
Visible in Extended Properties	Switch Visible in Extended Properties to ON to make it visible on the Extended Properties tab.
Order	Specifies the order of the field on the Extended Properties tab. To enter the order number, double-click the corresponding Value cell. You can also drag and move fields in the Configure Form pane to change its order.

5. Click **Save**.

Configuring Extended Properties

You can download extended properties in the XLSX format and use it as a template to [import extended properties](#). To download extended properties, on the **Extended Properties** tab, click **Export To Excel**.

Default Connector

When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the default connector to import option values from an MS Excel file or enter them manually.


To configure option values using the default connector, follow these steps:

1. In the **Configure Form** section, click the required UI element.

Ensure that you are in edit mode.

2. In the **Properties** section, click **Configure**.

The Connectors page appears.

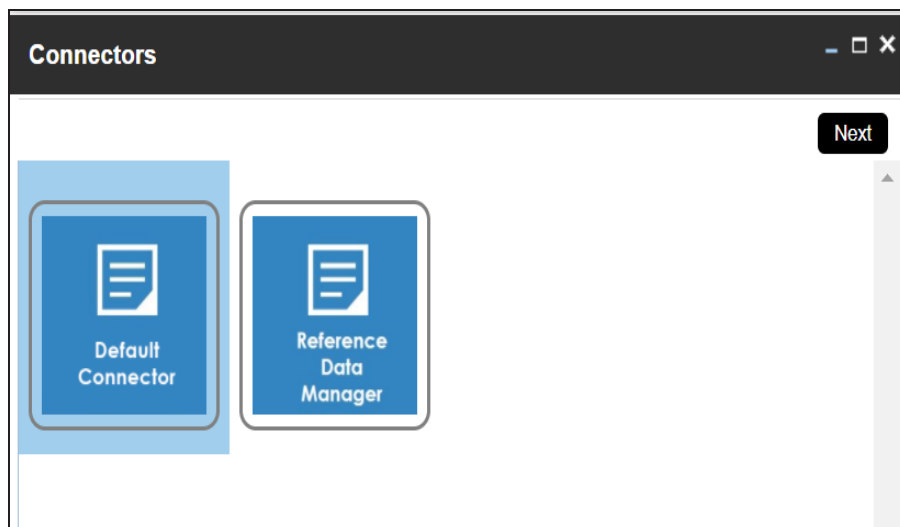

3. On the **Connectors** page, ensure that the Default Connector option is selected. Then, click **Next**.

The <UI_Element> Options page appears. For example, if the UI element is Combo Box, the Combo Box Options page appears.

Default Connector

Combo Box Options

Add Save Delete Import Excel

Text	Value

4. Use the following options:

Add

Use this option to enter text and value manually.

Import Excel

Use this option to import options from MS Excel files.

5. After configuring option values, click **Save**.

To add option values manually, follow these steps:

1. Click **Add**.
2. Enter values in the Text and Value fields.

The Text corresponds to options whereas the Value corresponds to underlying value of an option. You can add as many values as needed.

Default Connector

Combo Box Options

Add Save Delete Import Excel

Text	Value
Data Steward_GER	rcooper
Data Steward_ROM	vsmith

3. Click **Save**.

The option values appear in the UI element under the Configure Form section.

Combo Box

Select an option

Select an option
Data Steward_GER
Data Steward_ROM

To import option values from MS Excel files, follow these steps:

1. Click **Import Excel**.

The Upload Excel page appears.

Upload Excel

Attach Excel File No file chosen

Note*:

1. Empty FIELD pairs are ignored.
2. Duplicate FIELD pairs are ignored.
3. Slash(/) FIELD pairs are ignored.
4. FIELD pair with more than 200 characters are ignored.

2. Click **Choose File** and select the required MS Excel file.

The Upload Excel page appears. It displays the data in the MS Excel file.

Upload Excel			
 			
#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards	Data Steward_GER	mmannigan
2	Data Stewards	Data Steward_GER	mmenza
3	Data Stewards	Data Steward_GER	mmannigan

3. Double-click the **Select Column To Import** cell in the required column.


The available options appear.

 			
#	GROUP NAME	ROLE NAME	USER ID
#	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards	Select Column To Import FIELD VALUE Clear Selection	mmannigan

Field corresponds to options and Value corresponds to value of an option. You can import multiple columns. Use Clear Selection to undo the selection.

5. Click .


The <UI_Element> Options page appears. It displays the imported columns. You can delete a row that is not required. To delete rows, click a row and then click **Delete**.

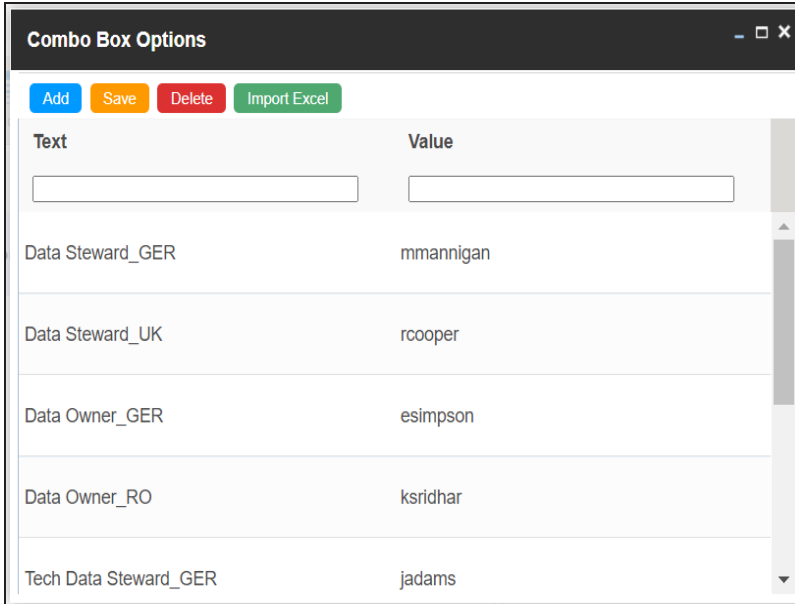

Text	Value
Data Steward_GER	mmannigan
Data Steward_UK	rcooper
Data Owner_GER	esimpson
Data Owner_RO	ksridhar
Tech Data Steward_GER	jadams

6. Click **Save**.

The option values appear in the UI element under the Configure Form section.

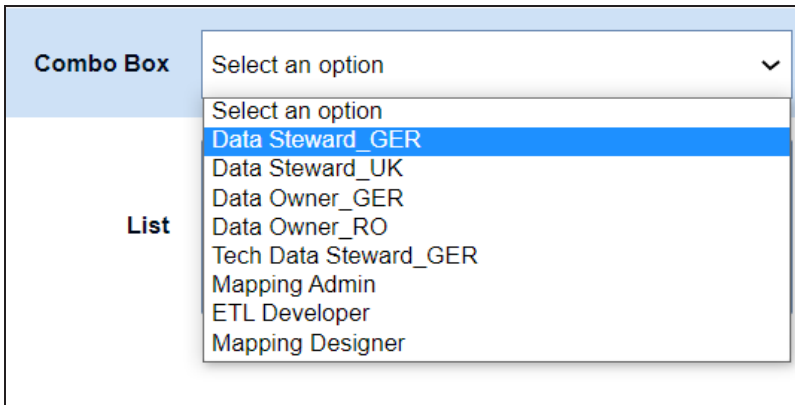

Combo Box	List
Select an option	Select an option Data Steward_GER Data Steward_UK Data Owner_GER Data Owner_RO Tech Data Steward_GER Mapping Admin ETL Developer Mapping Designer

Reference Data Manager

When you configure extended properties using UI elements, such as combo box, radio button, and list, you also need to configure their option values. You can use the Reference Data Manager connector to import option values from tables in the Reference Data Manager.


To configure option values using reference data manager connector, follow these steps:

1. In the **Configure Form** section, click the required UI element.

Ensure that you are in edit mode.


2. In the **Properties** section, click **Configure**.

The Connectors page appears.

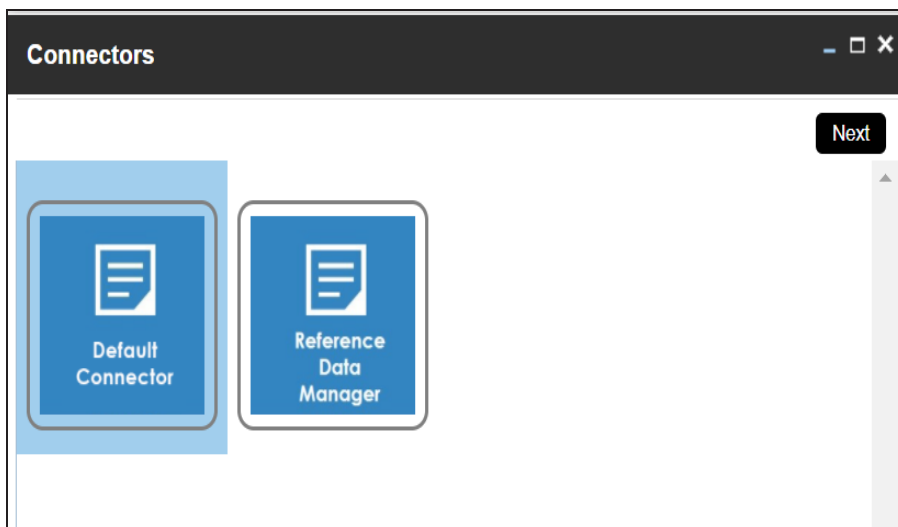


3. On the **Connectors** page, click **Reference Data Manager** and then click **Next**.

The Reference Data Manager page appears. It displays the reference folders in the Connector View pane.

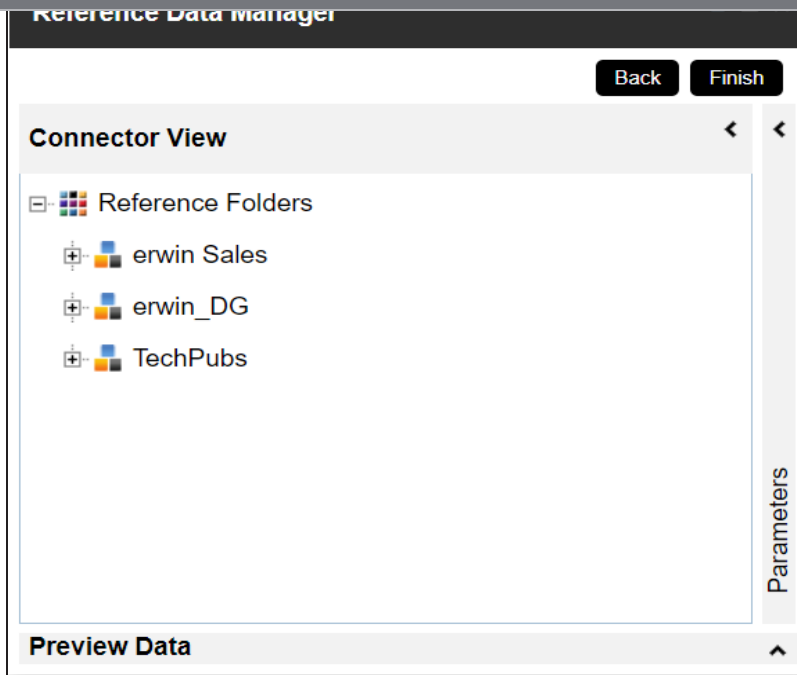

4. In the **Connector View** pane, expand a reference folder and select a reference table. The Parameters pane displays the columns in the reference table. You can also click Preview to view the data in the reference table.

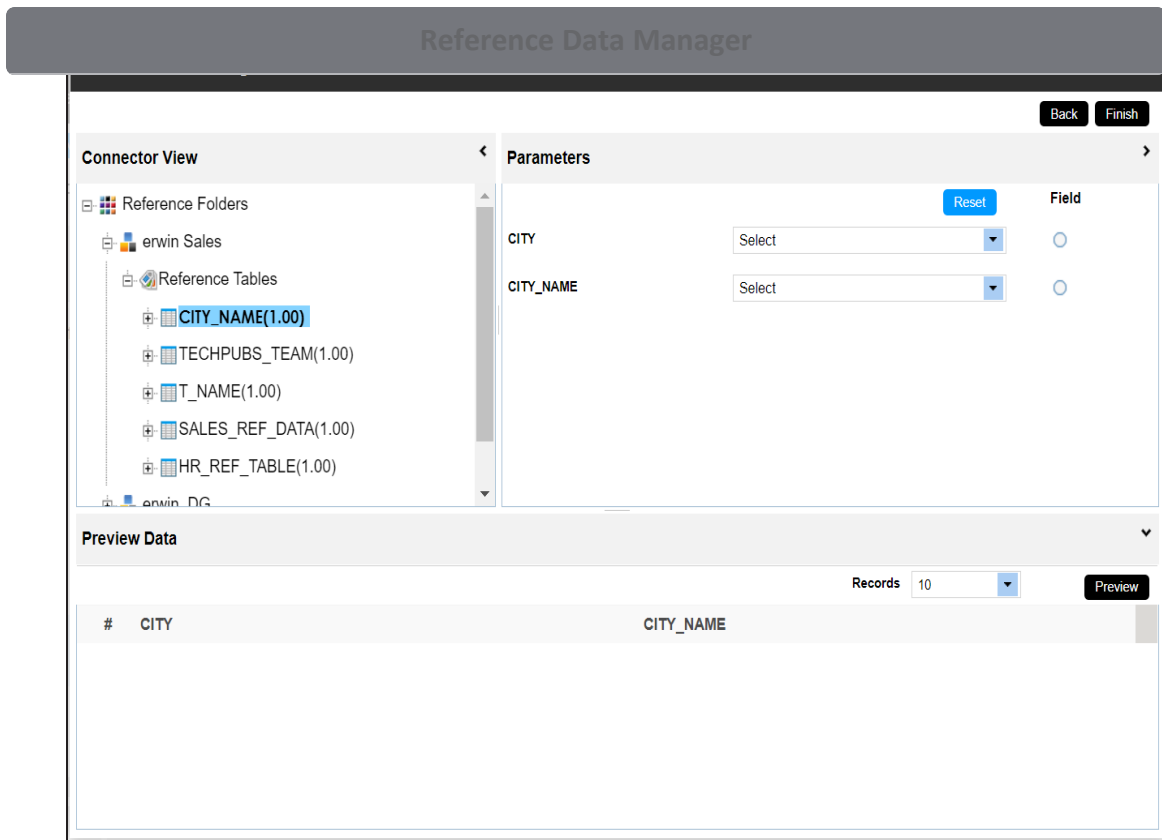

5. In the **Parameters** pane, click the radio button next to the required column.

You can select the controlling field from the drop down option. Ensure that you define the required dependencies in the Properties pane and that the option values for controlling field are configured using the same reference column.

6. Click **Finish**.

The Extended Properties Configuration page appears.

Reference Data Manager

The screenshot shows the 'Reference Data Manager' interface. At the top, there are 'Save', 'Cancel', and 'Delete' buttons. Below them is the 'Field Controls' section with icons for Group, Text Box, Combo Box, List, Radio, Check Box, Number, Boolean, Date Picker, and Category. The main area is divided into 'Configure Form' and 'Properties'.

Configure Form:

- Selected Roles Group:** A dropdown menu showing 'Compliance Officer'.
- List of Cities:** A list box showing 'Mumbai', 'Los Angeles' (highlighted), and 'New Delhi'.
- Radio:** A radio button at the bottom.

Properties:

Property	Value
Description	
Load On Startup	☐ OFF
Visible in Extended Properties	☒ ON

7. Under the **Properties** section, switch **Load on Startup** to **ON**.
8. Click **Save**.

The option values are configured. For example, in the following form the List of Cities is the controlling field for Selected City. Both the fields get their option values from the same reference column.

The screenshot shows the 'Configure Form' interface. It has a light blue header bar with the text 'Governance Responsibilities' and 'Compliance Officer'. Below this, there are three main sections:

- Selected Roles Group:** A dropdown menu showing 'Compliance Officer'.
- List of Cities:** A list box showing 'Mumbai', 'Los Angeles' (highlighted), and 'New Delhi'.
- Selected City:** A radio button labeled 'Los Angeles'.

Importing from Excel

You can import user-defined properties of a mapping specification from an XLSX file. You can either use an existing XLSX file or download a extended properties file from a mapping specification. Ensure that the XLSX file follows the correct template.

To import extended properties from XLSX files, follow these steps:


1. On the **Extended Properties** tab, click **Import From Excel**.

The Upload Excel page appears.



2. Click **Choose File**.
3. Browse and select the XLSX file.
4. Click .

The Upload Excel page appears. It displays the data in the XLSX file.

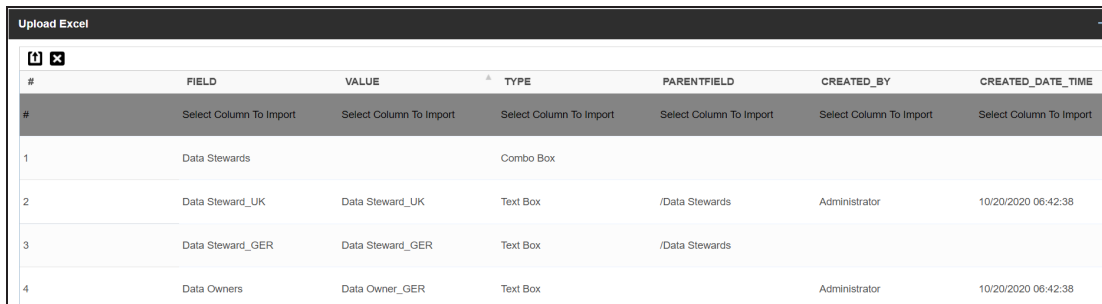

#	FIELD	VALUE	TYPE	PARENTFIELD	CREATED_BY	CREATED_DATE_TIME
#	Select Column To Import	Select Column To Import	Select Column To Import	Select Column To Import	Select Column To Import	Select Column To Import
1	Data Stewards		Combo Box			
2	Data Steward_UK	Data Steward_UK	Text Box	/Data Stewards	Administrator	10/20/2020 06:42:38
3	Data Steward_GER	Data Steward_GER	Text Box	/Data Stewards		
4	Data Owners	Data Owner_GER	Text Box		Administrator	10/20/2020 06:42:38

5. Double-click the **Select Column To Import** cell in the required column.

The available options appear.

Importing from Excel

#	FIELD	VALUE	TYPE	PARENTFIELD
#	Select Column To Import FIELD VALUE TYPE PARENTFIELD Clear Selection	Select Column To Import	Select Column To Import	Select Column To Import
1			Combo Box	
2	Data Steward_UK	Data Steward_UK	Text Box	/Data Stewards
3	Data Steward_GER	Data Steward_GER	Text Box	/Data Stewards

6. Select an appropriate option.

For example, if you select Field, then the selected column is imported as Field.

Similarly, you can also select the Value, Type, and Parentfield columns. Ensure that you at least select a Field column.

7. Click .

The extended properties are imported.

Configure
Edit
Delete
Import From Excel
Export To Excel

Form Values

Data Stewards

Select an option

Data Owners

Data Owner_GER

Technical Data Steward

Tech Data Steward_GER

Compliance Officer

Mapping Designer

Self Help

Branching and Merging Maps

Branching a map enables multiple users to work on a mapping specification. You can create multiple branches of a parent map depending on the number of users. Different users can work on these branches and make changes in the mapping specification. These branches can then be merged into the parent map.

Branching and merging maps involves:


- [Branching maps](#)
- [Merging changes into parent maps](#)

Branching Maps

Branching a map means copying the map and pasting it in another subject area or a project. The copied map acts as a child map and the original map is called the parent map.


To branch maps, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a map and hover over the **Copy Map**.

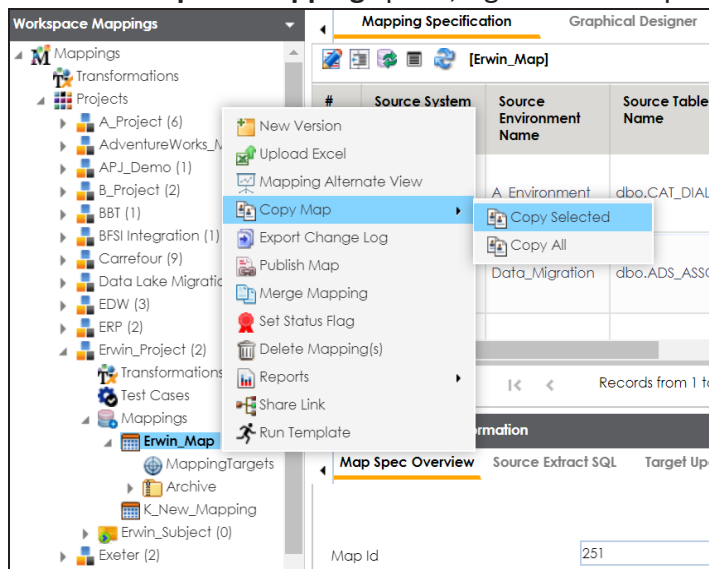


3. Click **Copy Selected**.
4. Right-click the **Mappings** node under the required project or subject area.

Branching Maps

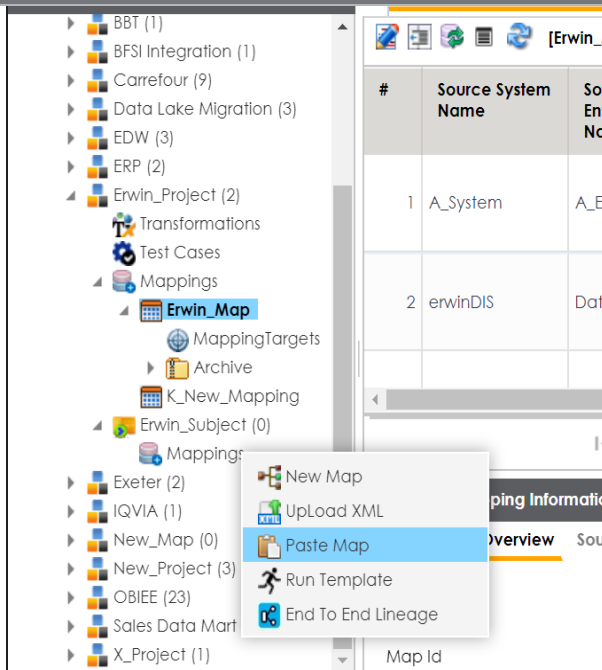

5. Click **Paste**.

The mail comments page appears.

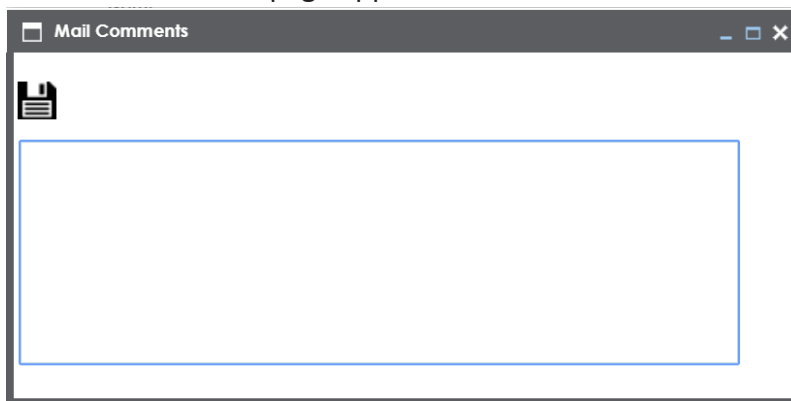

6. Enter **Mail Comments** and click .

The map is copied successfully into the subject area or the project. You can rename the child map and modify as needed. For example, you can change the reference

mappings, refer to the [Updating Map Spec Overview](#) topic.


If you enable notifications in Mapping Manager Settings, project users receive an email notification when the map is copied to a project. For more information on configuring notifications, refer to the [Configuring Notifications](#) topic.

Merging Changes into Parent Maps

After making the required changes in a child map you can merge it with a parent map. You can also notify project users about the merge through email notifications.

To merge child maps with parent maps, follow these steps:


1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a parent map.

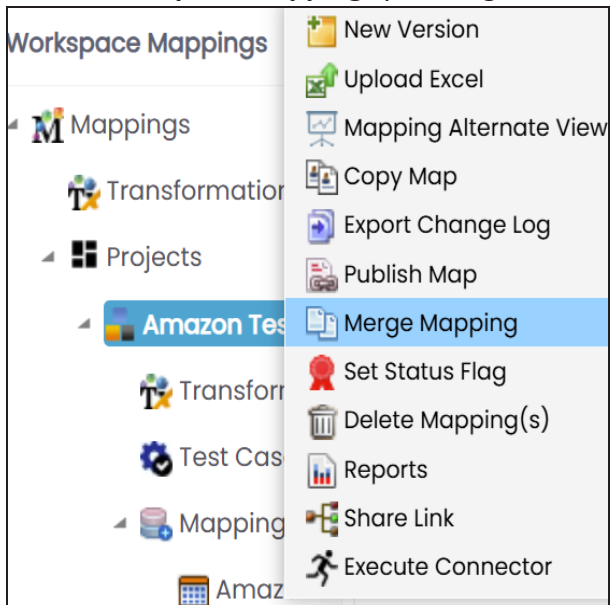

3. Click **Merge Mapping**.

The Merge Map page appears.

Merging Changes into Parent Maps

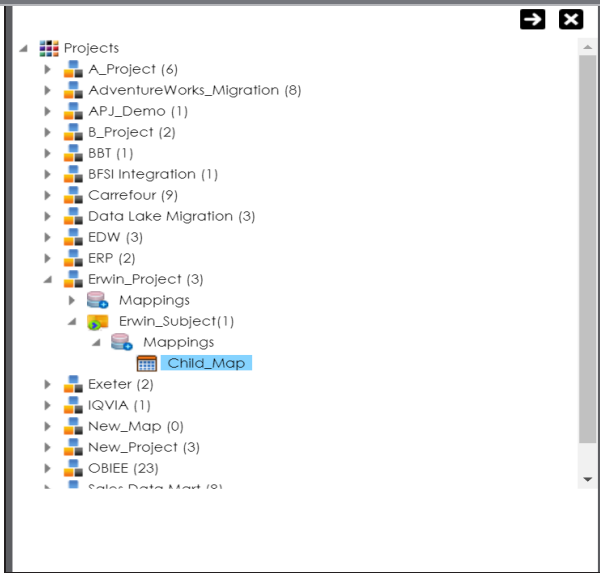

4. Select a child map.

5. Click .

The Merge Map page shows the changed data with respect to the parent map.

Merge Map

☒ Overwrite existing version ☐ Create New version

Select	Title/Map Name	Target System Name	Target Environment Name	Target Table Name	Target Column Name
☒	Changed Data				
☐	Erwin_Map(1.07) [Erwin_Project]				
☒	Child_Map(1.00) [Erwin_Project/ Erwin_Su]				
☐	Erwin_Map(1.07) [Erwin_Project]	erwinDIS	Data_Migration	dbo.ADS_New_ASSOCIATIONS	ID_New
☒	Child_Map(1.00) [Erwin_Project/ Erwin_Su]	erwinDIS	Data_Migration	dbo.ADS_New_ASSOCIATIONS	ID_New
☒	Unchanged Data				
☒	Erwin_Map(1.07) [Erwin_Project]				
☒	Erwin_Map(1.07) [Erwin_Project]				
☒	Erwin_Map(1.07) [Erwin_Project]				
☒	Erwin_Map(1.07) [Erwin_Project]				

Records from 1 to 18 of 18

Mail Comments

Mail Comments

Overwrite existing version

Use this option to overwrite the existing version.

Create New Version

Use this option to create new version of the parent map.

7. Enter relevant **Mail Comments**.

8. Click .

The child map is merged with the parent map.


If you enable notifications in the Mapping Manager Settings the project users receive mail comments through an email notification. For more information on configuring notifications, refer to the [Configuring Notifications](#) topic.

Deleting Maps

You can delete maps that are not required in a project. You can also opt to delete all the versions of a map.

To delete maps, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, select a map or multiple maps.
You can use shift key to select multiple maps.
3. Right-click the selection.

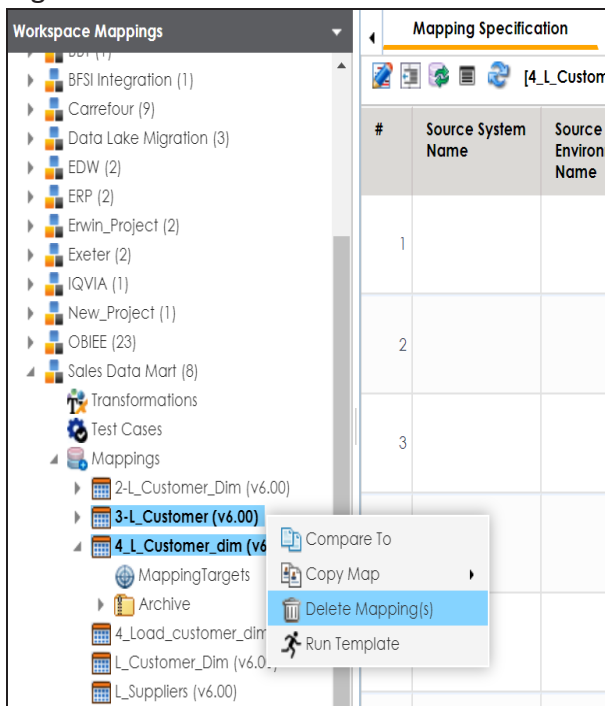

4. Click **Delete Mapping(s)**.

The Delete Mappings-Selected Mappings List page appears.

Deleting Maps

#	Project Hierarchy	Map Name	Current Version	All Versions	
			☐	☐	
1	Sales Data Mart	4-L_Customer_dim	☐	☐	✖
2	Sales Data Mart	3-L_Customer	☐	☐	✖

5. Use the following options:

Remove Mapping from Current Selection (✖)

Use this option to remove mappings from the current selection.

Delete all Versions

Use this option to delete all versions of the mappings.

Delete Current Version

Use this option to delete current version of the maps.

Viewing Workflow Logs


A default workflow, Mapping_Manager_Default_Workflow is assigned to all projects in the Mapping Manager. You can also create a workflow and assign it to your project. For more information on assigning workflow to projects, refer to the [Managing Mapping Manager Workflows](#) section.

You can view the flow of actions of the workflow assigned to a map. Along with other information, the workflow displays the current state of the map in the workflow.

To view workflow logs, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.


By default, the Mapping Specification tab opens.

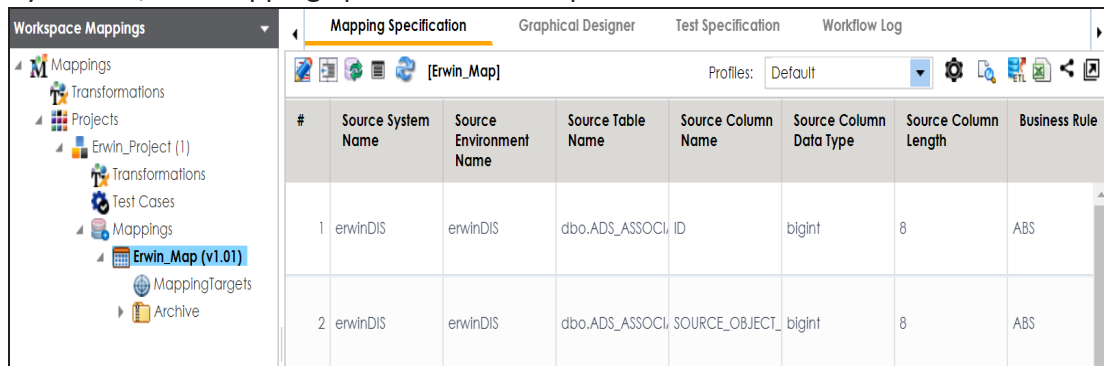

#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	erwinDIS	erwinDIS	dbo.ADS_ASSOCI	ID	bigint	8	ABS
2	erwinDIS	erwinDIS	dbo.ADS_ASSOCI	SOURCE_OBJECT_	bigint	8	ABS

3. Click the **Workflow Log** tab.

The workflow log of the map appears. The current workflow stage blinks in the diagram.

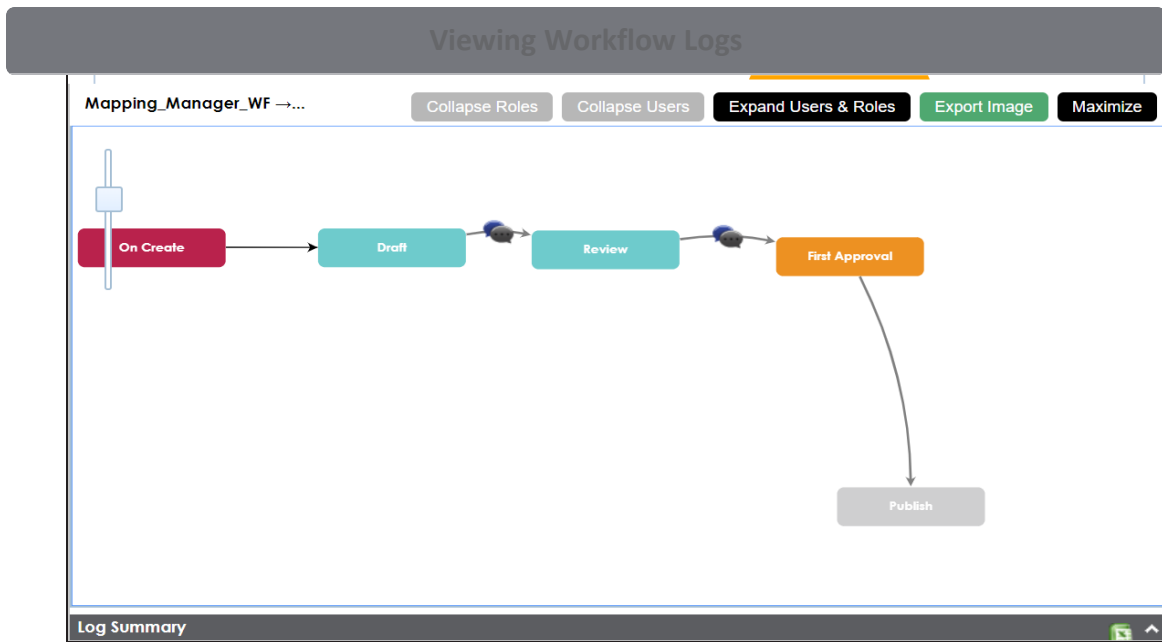

Use the following options:

User Comments (🗨️)

Use this option to view users and their comments in each stage.

Expand/Hide Users and Roles

Use this option to view or hide users and roles assigned to workflow stages.

Collapse/Expand Roles

Use this option to switch between the collapsed and expanded roles view. This option is enabled when you are in the Expand Users and Roles view.

Collapse/Expand Users

Use this option to switch between the collapsed and expanded users view. This option is enabled when you are in the Expand Users and Roles view.

Export Image

Use this option to download the workflow in the JPG format.

Analyzing Mappings

This section walks you through the multiple ways of analyzing source to target mappings.

Analyzing mappings involves:

- Data preview
 - [Generating virtual preview of target](#)
 - [Previewing data through Metadata Tree View](#)
- Gap analysis
 - [Performing table gap analysis](#)
 - [Performing column gap analysis](#)
- Impact analysis
 - [Running impact analysis for tables and columns](#)
- Lineage analysis
 - [Running dual, forward, or reverse lineage analysis](#)
 - [Running end to end lineage](#)
- [Business view](#)
- [Mapping statistics](#)

Generating Virtual Preview of Targets

When you create a mapping specification, source column values undergo modifications based on the applied transformations. These modified values are updated in target columns based on the target update strategy. You can generate a virtual preview of targets to view the updated target columns.



Mapping specifications involving multiple source or target systems do not support virtual preview of targets.

To generate a virtual preview of targets, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.

The Mapping Specification grid appears.

Mapping Specification							
[Integration]							
#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEID	int	4	FLOOR
2	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCENAME	varchar	100	REVERSE
3	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEDESC	varchar	150	

3. Click


Mapping Preview page appears, displaying the virtual preview of the target based on the source and transformations.

Generating Virtual Preview of Targets



Mapping preview is currently supported for RDBMS only. Here is the list of transformation supported in Mapping Preview:

CONCAT, LTRIM, RTRIM, TRIM, CEIL, FLOOR, RPAD, LPAD, ROUND, SQRT, SUBSTR, UPPER, LOWER, TRUNC, SIN, COS, TAN, SINH, TANH, REVERSE, IS_DATE, IS_NUMBER, IS_SPACES, ISNULL, IIF, ISEMPY, NVL, DECODE.

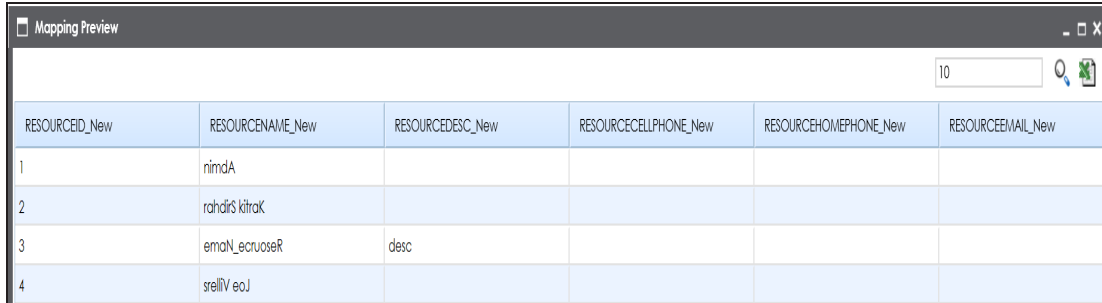

RESOURCEID_New	RESOURCENAME_New	RESOURCEDESC_New	RESOURCECELLPHONE_New	RESOURCEHOMEPHONE_New	RESOURCEEMAIL_New
1	nimdA				
2	rahdiS kItak				
3	emaN_eoruoeR	desc			
4	steliV eoJ				

You can download the mapping preview details in the XLSX format. To download the mapping preview details, click  .

Previewing Data

You can preview data in a table using the Metadata Tree View pane. You can also enter SQL queries to preview the required data in the database.

To preview data from databases, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a project.


The Metadata Tree View pane appears on the right.

The screenshot shows the Mapping Manager interface. On the left, the 'Workspace Mappings' pane is expanded, showing a tree view of mappings. The 'Projects' folder is selected, and the 'Project (4)' item is highlighted. On the right, the 'Mapping Summary' tab is active, displaying a table of mapping details.

#	Project Name	Subject Hierarchy	Map Name	Lock Status
1	Project		Data Integration	
2	Project		DragDrop	
3	Project		SalesforceIntegration	
4	Project		TechPubs	

3. In the **Metadata Tree View** pane, right-click a table and hover over **Preview Data**.

Metadata Tree View

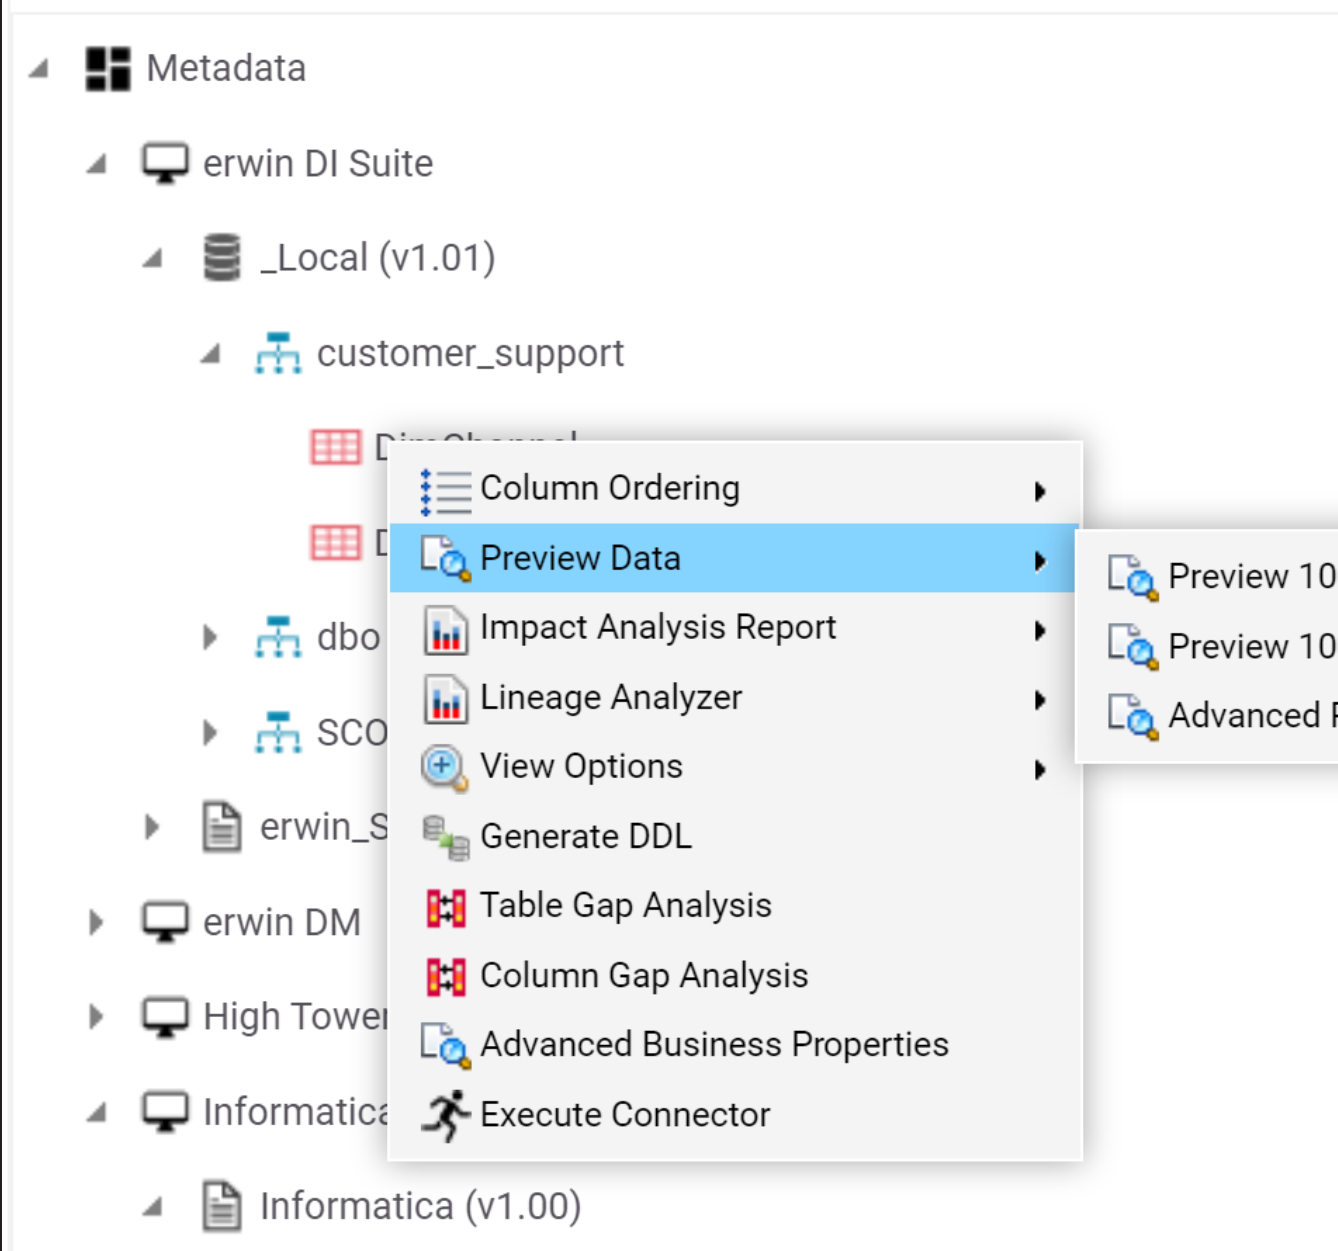

4. Click any one of the following:

Preview 100 Records

Previewing Data


Preview 1000 Records

Click this option to preview the first 1000 records.

Advanced Preview

Click this option to preview data based on a SQL query.


For example, if you click **Preview 100 Records**, then the User Credentials page appears.

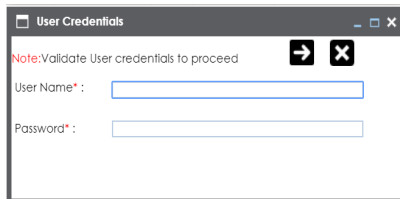

A dialog box titled "User Credentials" with a "Note: Validate User credentials to proceed" message. It contains two input fields: "User Name*" and "Password*", each with a red asterisk indicating a required field. There are also "OK" and "Cancel" buttons.

5. Enter **User Name** and **Password** to connect with the database.

You can preview the data based on the options you selected.

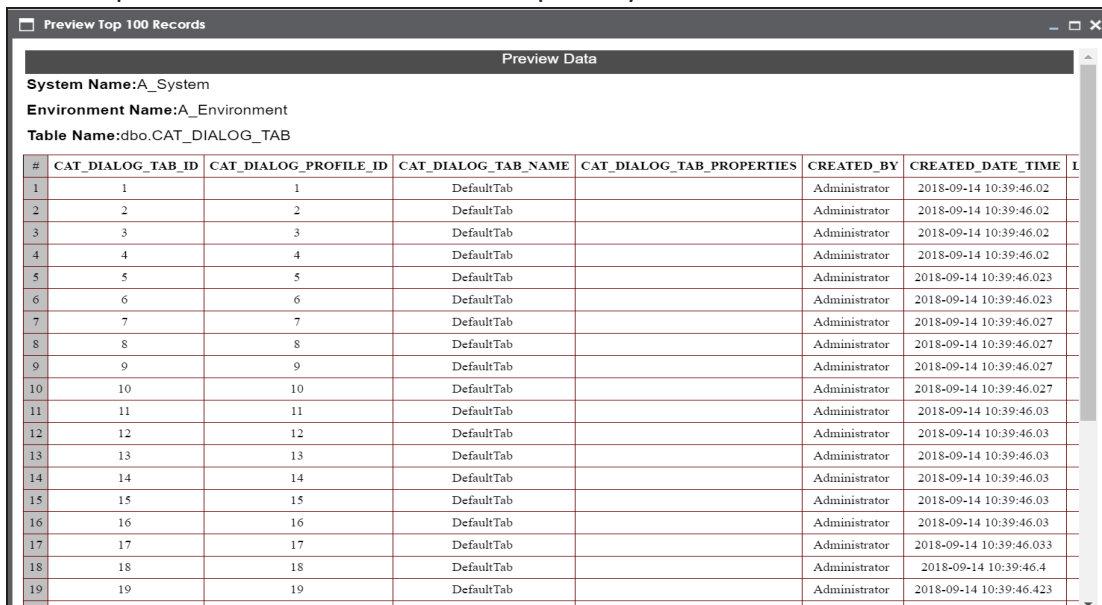

A dialog box titled "Preview Top 100 Records" showing a table of data. The table has columns: #, CAT_DIALOG_TAB_ID, CAT_DIALOG_PROFILE_ID, CAT_DIALOG_TAB_NAME, CAT_DIALOG_TAB_PROPERTIES, CREATED_BY, and CREATED_DATE_TIME. The data shows 19 rows of records, all with "DefaultTab" as the CAT_DIALOG_TAB_NAME and "Administrator" as the CREATED_BY.

#	CAT_DIALOG_TAB_ID	CAT_DIALOG_PROFILE_ID	CAT_DIALOG_TAB_NAME	CAT_DIALOG_TAB_PROPERTIES	CREATED_BY	CREATED_DATE_TIME
1	1	1	DefaultTab		Administrator	2018-09-14 10:39:46.02
2	2	2	DefaultTab		Administrator	2018-09-14 10:39:46.02
3	3	3	DefaultTab		Administrator	2018-09-14 10:39:46.02
4	4	4	DefaultTab		Administrator	2018-09-14 10:39:46.02
5	5	5	DefaultTab		Administrator	2018-09-14 10:39:46.023
6	6	6	DefaultTab		Administrator	2018-09-14 10:39:46.023
7	7	7	DefaultTab		Administrator	2018-09-14 10:39:46.027
8	8	8	DefaultTab		Administrator	2018-09-14 10:39:46.027
9	9	9	DefaultTab		Administrator	2018-09-14 10:39:46.027
10	10	10	DefaultTab		Administrator	2018-09-14 10:39:46.027
11	11	11	DefaultTab		Administrator	2018-09-14 10:39:46.03
12	12	12	DefaultTab		Administrator	2018-09-14 10:39:46.03
13	13	13	DefaultTab		Administrator	2018-09-14 10:39:46.03
14	14	14	DefaultTab		Administrator	2018-09-14 10:39:46.03
15	15	15	DefaultTab		Administrator	2018-09-14 10:39:46.03
16	16	16	DefaultTab		Administrator	2018-09-14 10:39:46.03
17	17	17	DefaultTab		Administrator	2018-09-14 10:39:46.033
18	18	18	DefaultTab		Administrator	2018-09-14 10:39:46.4
19	19	19	DefaultTab		Administrator	2018-09-14 10:39:46.423



If you use Advanced Preview then you need to enter a SQL query in the space provided and click  to preview the data.

Previewing Data

```
SELECT [CAT_DIALOG_TAB_ID],[CAT_DIALOG_PROFILE_ID],[CAT_DIALOG_TAB_NAME],[CAT_DIALOG_TAB_PROPERTIES],[CREATED_BY],[CREATED_DATE_TIME],[LAST_MODIFIED_BY],[LAST_MODIFIED_DATE_TIME] FROM dbo.CAT_DIALOG_TAB
```



Preview Data

System Name:A_System

Environment Name:A_Environment

#	CAT_DIALOG_TAB_ID	CAT_DIALOG_PROFILE_ID	CAT_DIALOG_TAB_NAME	CAT_DIALOG_TAB_PROPERTIES	CREATED_BY	CREATED_DATE_TIME	
1	1	1	DefaultTab		Administrator	2018-09-14 10:39:46.02	
2	2	2	DefaultTab		Administrator	2018-09-14 10:39:46.02	
3	3	3	DefaultTab		Administrator	2018-09-14 10:39:46.02	
4	4	4	DefaultTab		Administrator	2018-09-14 10:39:46.02	
5	5	5	DefaultTab		Administrator	2018-09-14 10:39:46.023	
6	6	6	DefaultTab		Administrator	2018-09-14 10:39:46.023	
7	7	7	DefaultTab		Administrator	2018-09-14 10:39:46.027	
8	8	8	DefaultTab		Administrator	2018-09-14 10:39:46.027	
9	9	9	DefaultTab		Administrator	2018-09-14 10:39:46.027	
10	10	10	DefaultTab		Administrator	2018-09-14 10:39:46.027	
11	11	11	DefaultTab		Administrator	2018-09-14 10:39:46.03	
12	12	12	DefaultTab		Administrator	2018-09-14 10:39:46.03	
13	13	13	DefaultTab		Administrator	2018-09-14 10:39:46.03	

Performing Table Gap Analysis

You can perform a table gap analysis and find:

- Tables not being used in mappings
- Tables existing on mapping without valid source or target

You can perform table gap analysis at the following levels:

- System
- Environment
- Table

To perform table gap analysis, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a project.

The Metadata Tree View pane appears on the right.

The screenshot shows the Mapping Manager interface. On the left is the 'Workspace Mappings' pane with a tree view of projects. The main area displays a table of mappings. On the right is the 'Metadata Tree View' pane showing a hierarchy of metadata.


#	Project Name	Subject Hierarchy	Map Name	Lock Status	Locked By	Locked Date	Workflow Status	Mapping State	Mapping Description
1	Project		Data Integration				Preliminary Draft	In Progress	
2	Project		DragDrop				Preliminary Draft	In Progress	
3	Project		SalesforceIntegration		Administrator	23-05-2020 17:37:33	Preliminary Draft	In Progress	
4	Project		TechPubs				Preliminary Draft	In Progress	Drag&Drop Trial

The Metadata Tree View on the right lists the following metadata items:

- erwin DI Suite
- erwin DM
- High Tower
- Informatica
- Oracle
- Salesforce
- SAP
- Snowflake
- SQL System
- SQLTechPubs
- TABLEAU
- TALEND
- To be deleted

3. In the **Metadata Tree View** pane, you can right-click a:
 - System: Use this option to run the analysis on all the tables under a system.
 - Environment: Use this option to run the analysis on all the tables under an environment.
 - Table: Use this option to run the analysis on a table.


system.

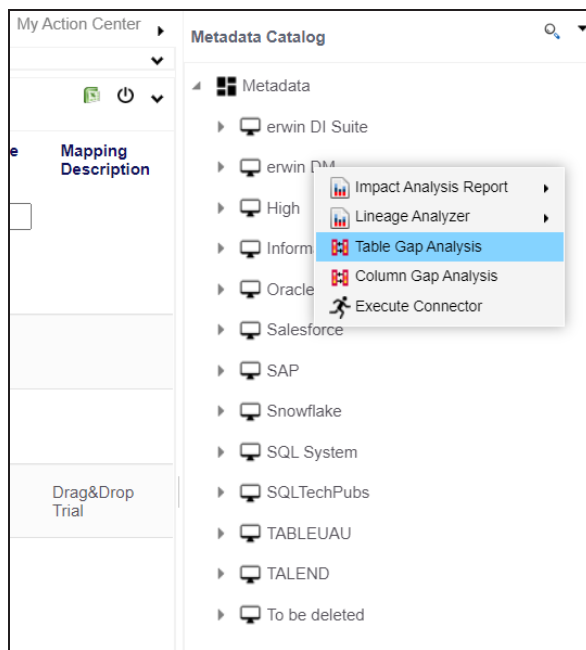

4. Click **Table Gap Analysis**.

The Table Gap Analysis page appears.

Performing Table Gap Analysis

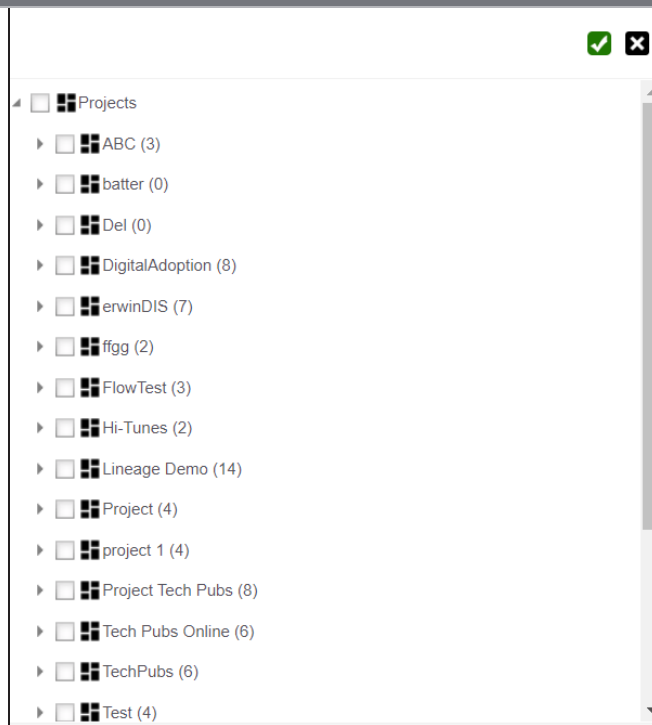

5. Select projects and mappings.

6. Click .

The Table Gap Analysis Report for the selected projects and mappings appears.

Performing Table Gap Analysis

Development Team

Export:     

Table Gap Analysis Report						
Table Gap Analysis Result For PROJECT(S) : AdventureWorks_Migration						
Tables not being used on any mapping						
#	System Name	Environment Name	Table Name			
1	Erwin_Sales	Integration	dbo.RM_RESOURCE			
2	Erwin_Sales	Integration_Target	dbo.RM_RESOURCE			
3	Erwin_Sales	N_Environment	dbo.RM_PROJECT			
4	Erwin_Sales	N_Environment	dbo.RM_RESOURCE			
Tables existing on Mapping without valid Source (or) Target						
#	System Name	System Env Name	Table Name	Project Name	Map Name	Usage
No Records Found						

Performing Column Gap Analysis

A column gap analysis enables you to find:

- Columns not existing in mappings
- Source columns existing on mappings without valid target
- Target columns listed on mappings without business rule and source column

You can perform column gap analysis at the following levels:

- System
- Environment
- Table

To perform column gap analysis, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a project.

The Metadata Tree View pane appears on the right.


The screenshot shows the Mapping Manager interface. On the left is the 'Workspace Mappings' pane with a tree view containing 'Mappings', 'Transformations', and 'Projects'. Under 'Projects', several projects are listed with their counts in parentheses: ABC (3), batter (0), Del (0), dgfd (0), DigitalAdoption (4), erwinDIS (7), ffgg (2), FlowTest (3), Hi-Tunes (2), Lineage Demo (14), and a selected 'Project (4)'. On the right is the 'Mapping Summary' pane, which has tabs for 'Mapping Summary', 'Project Details', 'Project Documents', 'Project Users', and 'Project Roles'. The 'Mapping Summary' tab is active, showing a 'Mapping Search' bar and a 'Mapping Details' table. The table has columns for '#', 'Project Name', 'Subject Hierarchy', 'Map Name', and 'Lock Status'. It contains four rows of data, each representing a project mapping.

#	Project Name	Subject Hierarchy	Map Name	Lock Status
1	Project		Data Integration	
2	Project		DragDrop	
3	Project		SalesforceIntegration	
4	Project		TechPubs	

Performing Column Gap Analysis

- System: Use this option to run the analysis on all the columns under a system.
- Environment: Use this option to run the analysis on all the columns under an environment.
- Table: Use this option to run the analysis on all the columns under a table.


For example, the following image displays the available options when you click a system.

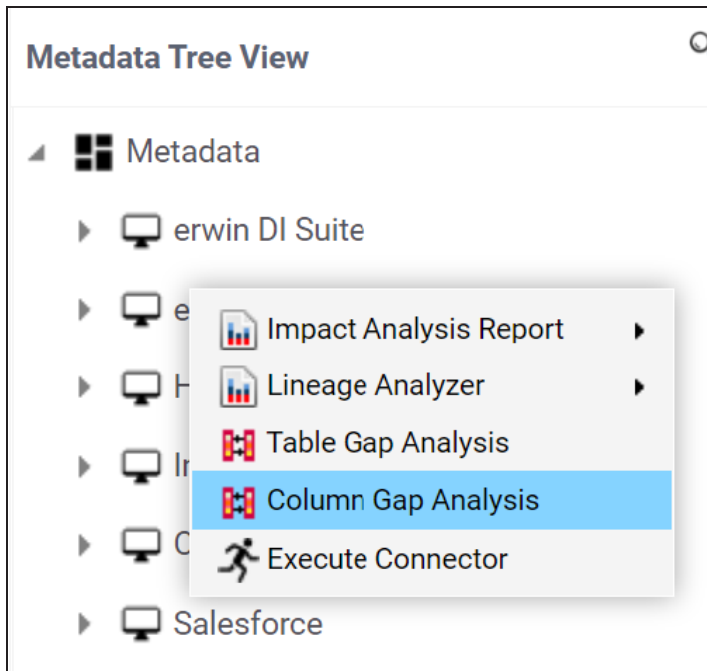

4. Click **Column Gap Analysis**.

The Column Gap Analysis page appears.

Performing Column Gap Analysis

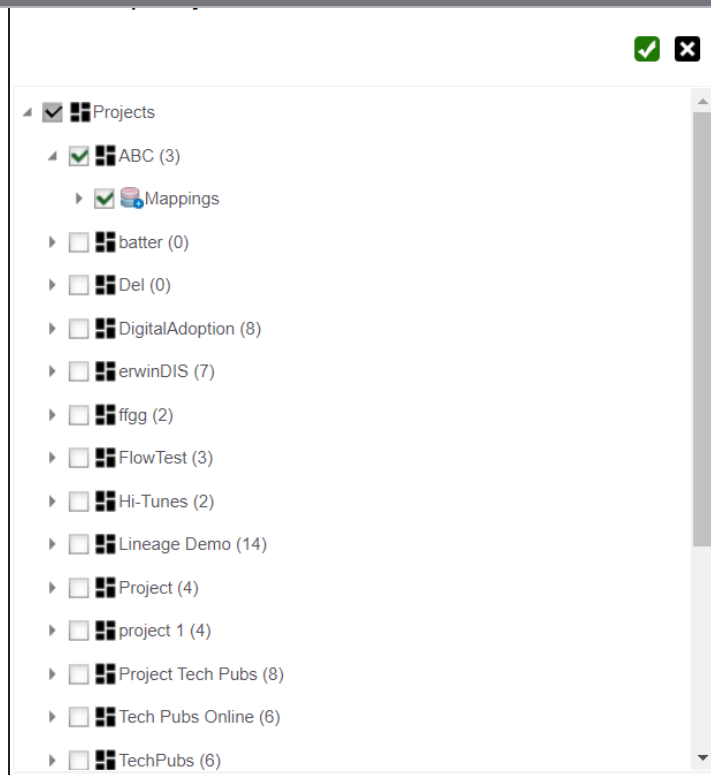

5. Select projects and mappings.

6. Click .

The Column Gap Analysis Report for the selected projects and mappings appears.

Performing Column Gap Analysis

Development Team

Export:     

Column Gap Analysis Report							
Column Gap Analysis Result For PROJECT(S) : Erwin_Sales							
Columns not existing on any Mapping							
#	System Name	Environment Name	Table Name	Column Name			
1	Erwin_Sales	Integration_Target	dbo.RM_RESOURCE	RESOURCEID			
2	Erwin_Sales	Integration_Target	dbo.RM_RESOURCE	RESOURCENAME			
3	Erwin_Sales	Integration_Target	dbo.RM_RESOURCE	RESOURCEDESC			
4	Erwin_Sales	Integration_Target	dbo.RM_RESOURCE	RESOURCECELLPHONE			
5	Erwin_Sales	Integration_Target	dbo.RM_RESOURCE	RESOURCEHOMEPHONE			
6	Erwin_Sales	Integration_Target	dbo.RM_RESOURCE	RESOURCEEMAIL			
7	Erwin_Sales	N_Environment	dbo.RM_PROJECT	PROJECTID			
8	Erwin_Sales	N_Environment	dbo.RM_PROJECT	RESOURCEID			
9	Erwin_Sales	N_Environment	dbo.RM_PROJECT	PROJECTNAME			
10	Erwin_Sales	N_Environment	dbo.RM_PROJECT	PROJECTDESC			
11	Erwin_Sales	N_Environment	dbo.RM_RESOURCE	RESOURCE_ID			
12	Erwin_Sales	N_Environment	dbo.RM_RESOURCE	RESOURCENAME			
13	Erwin_Sales	N_Environment	dbo.RM_RESOURCE	RESOURCEDESC			
14	Erwin_Sales	N_Environment	dbo.RM_RESOURCE	RESOURCECELLPHONE			
15	Erwin_Sales	N_Environment	dbo.RM_RESOURCE	RESOURCEHOMEPHONE			
16	Erwin_Sales	N_Environment	dbo.RM_RESOURCE	RESOURCEEMAIL			
Source Columns existing on Mapping without valid Target (with or without BR) (or) Target Columns listed on Mapping without BR (Without Source Col)							
#	System Name	Environment	Table Name	Column Name	Project Name	Map Name	Usage
No Records Found							

© 2018 erwin, Inc. All rights reserved

Page 1 of 1

Running Impact Analysis

A technical asset may act as a source, target, or both in mappings. After mapping source metadata to target metadata, you can run impact analysis on the technical assets. Impact analysis helps you understand upstream and downstream dependencies of technical assets and their impacts linked to business assets. It helps you assess the impact of transformations and source or target-level changes. Apart from this, you can also, view lineages based on selected assets and export its impact analysis.

You can run impact analysis at the following levels:

- [System](#)
- [Environment](#)
- [Table](#)
- [Column](#)

Running Lineage Analysis

After mapping source metadata with target metadata, you can run the lineage analyzer on the mapping through the Mapping Specification grid. The generated data lineage report helps you trace the data's origin, its transformations, and its destination after source to target mappings.

You can run the lineage at the following levels:

- [System](#)
- [Environment](#)
- [Table](#)
- [Column](#)

System

You can run forward and reverse lineage analysis to trace metadata at the system level. Forward lineage analysis generates lineage with the system as source. And, reverse lineage analysis generates lineage with the system as target. The Dual-Combined View lineage analysis generates a lineage, which includes both forward and reverse lineage.

This topic walks you through the following:

- [Viewing Lineage](#)
- [Working on Lineage](#)

Viewing Lineage

To run lineage at the system level, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click the required mapping.

The Mapping Specification grid appears.

Mapping Specification									
[Data Integration]									
#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable Flag
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0	0	☐
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nvarchar	40	0	0	☐
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nvarchar	30	0	0	☒
4	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactTitle	nvarchar	30	0	0	☒
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60	0	0	☒
6	SQLTechPubs	SQLTechPubs	dbo.Customers	City	nvarchar	15	0	0	☒

3. Select a row.

The options available for Lineage Analyzer appear.

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nvarchar	40
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nvarchar	30
4	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60


Font Color
Font Styles
Background Color
Font Size
Clear Formatting
Impact Analysis Report
Lineage Analyzer
Extended Properties
Share Link

Forward
Reverse
Dual - Combined View

5. Hover over any one of the following:

- **Forward:** Use this option to view forward lineage.
- **Reverse:** Use this option to view reverse lineage.
- **Dual - Combined View:** Use this option to view combined forward and reverse lineage.

For example, when you hover over Forward, All Projects and By Project appear as options.

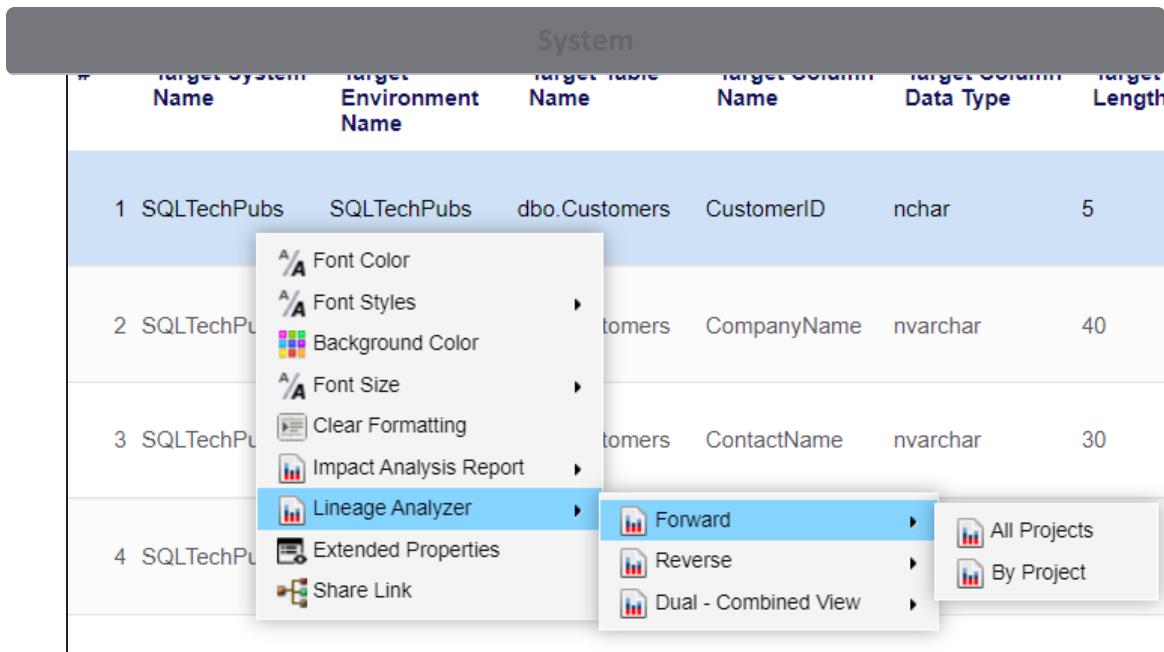


6. Use the following options:

All Projects

Use this option to include all the projects in lineage analysis.


By Project

Use this option to select projects for lineage analysis.

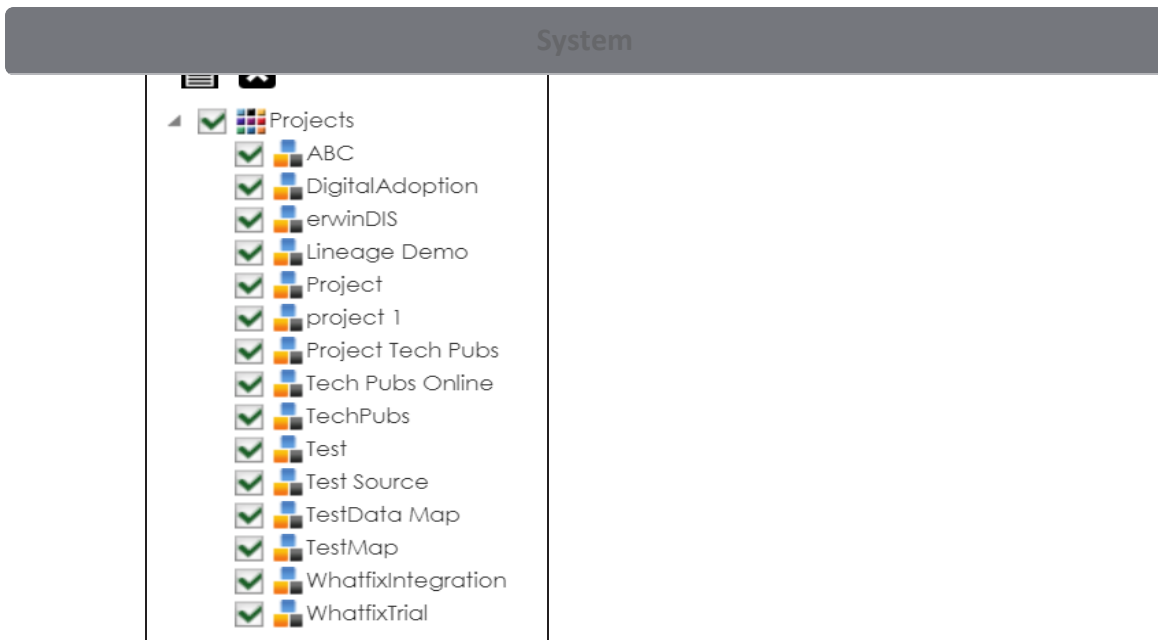


By default, all projects are selected. Clear the check boxes for the projects that are not required. Then, click .

The system's forward lineage is generated based on the options you selected. Similarly, you can generate reverse, and dual lineage for a system. By default, the lineage appears in Graphical View.

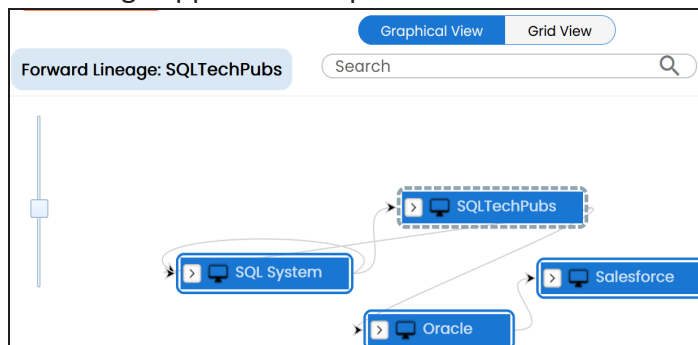

7. You can click **Graphical View** or **Grid View** to switch between them:

- **Graphical View:** The graphical view displays the lineage of a system in a graphical format. Selecting a system on the graphical view displays its Legends. Hovering over a system displays an  icon. Clicking this icon opens the object's

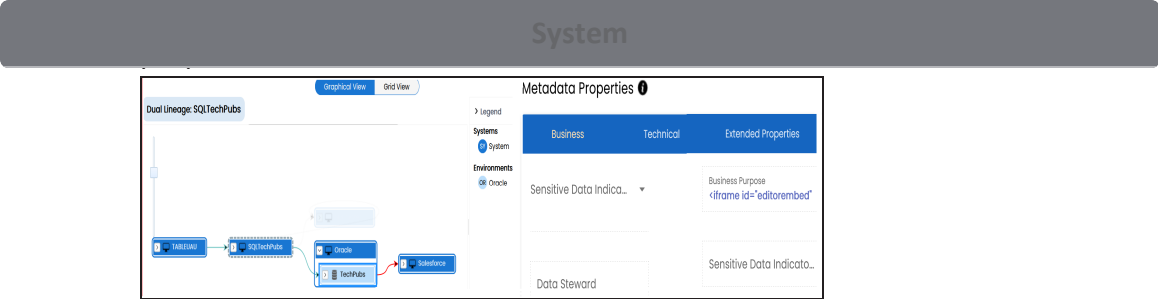

Grid View: The grid view displays the lineage of a system in a tabular format. You can view the source and target system associated with the selected system.

The screenshot shows the 'Grid View' for 'SQLTechPubs'. At the top, there is a search bar and two tabs: 'Graphical View' and 'Grid View'. Below the tabs, the title 'Dual Lineage: SQLTechPubs' is displayed. The main content is a table with three columns: '#', 'Source System Name', and 'Target System Name'. The table contains six rows of data, each representing a system and its lineage.


#	Source System Name	Target System Name
1	TABLEUAU	SQLTechPubs
2	Informatica	Informatica
3	SQL System	SQL System
4	SQL System	SQLTechPubs
5	erwin DM	erwin DM
6	SAP	SAP

Use the following options to work on the lineage in graphical view:

Search (🔍)

Use this option to search for systems that you want to see on the lineage.

Type in the search box to see a list of related systems that are available on the lineage.

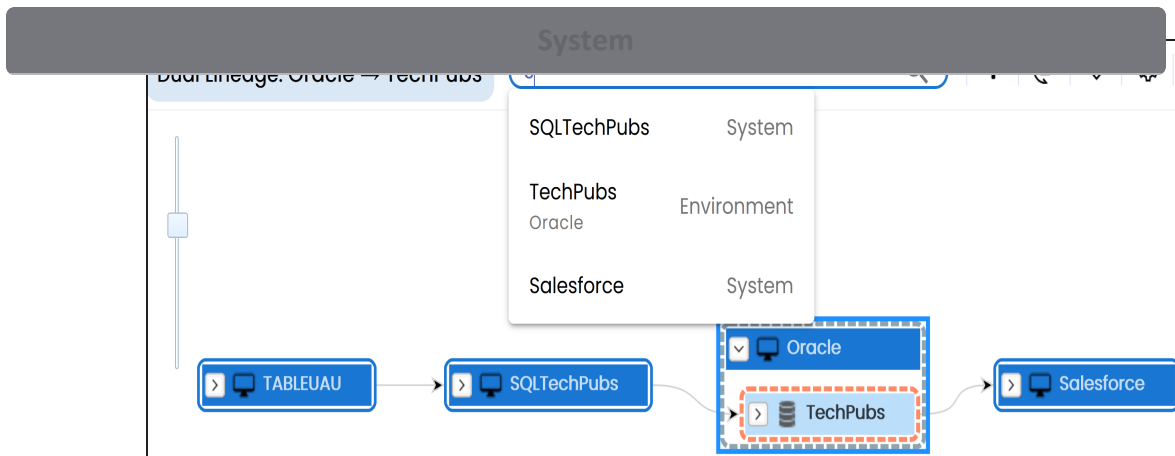

Filter Objects ()

Use this option to filter and display required systems in the lineage view.

Filter Objects





- ☒ TABLEUAU
- ☐ SQLTechPubs
- ☐ Oracle
- ☒ Salesforce

The unselected objects are replaced with black dots on the lineage diagram.




Switch View ()

Double-click an object to see Switch View option. Use this option to switch the level of objects displayed and see the system, environment, or table in which the object is located.

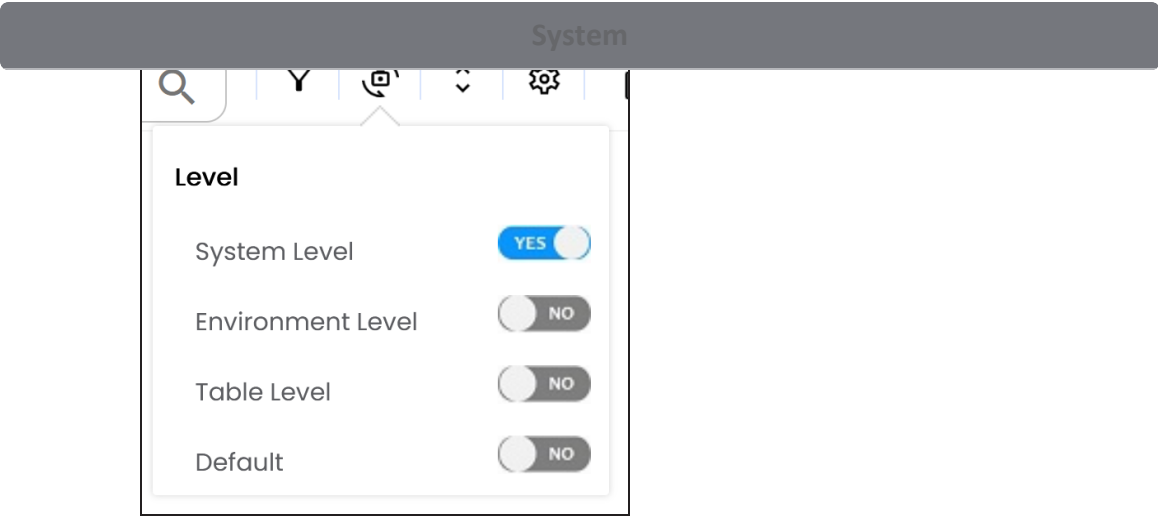

Options (⚙️)

Use this option to view lineage types, business properties, and customizations options. For more information on lineage options, refer to the [Working on Lineage](#) section.

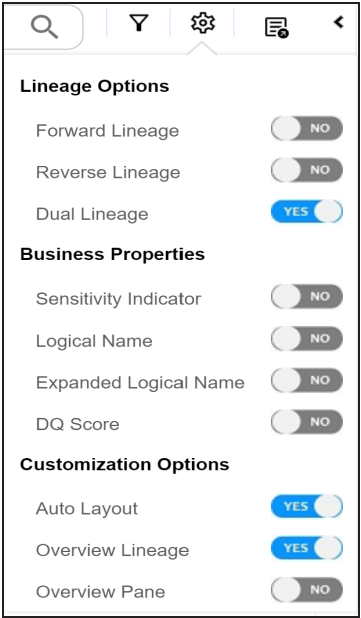


Export (📄)

System

Use this option to export the lineage. Click  and use the following options:

- **Image** (): Use this option to download the lineage as an image, in the .JPG format. Ensure that you expand the required nodes in a lineage before downloading the lineage as image.
- **PDF** (): Use this option to download the lineage report in the .PDF format. Ensure that you expand the required nodes in a lineage before downloading the lineage report as PDF.
- **Excel** (): Use this option to download the lineage report in the .XLSX format. Ensure that you expand the required nodes in a lineage before downloading the report.

On the lineage, expand a system node, and select an environment to view its lineage path. The environment is highlighted in orange color, its forward lineage path appears in red, and its reverse lineage path appears in blue. Systems that are not part of a lineage path disappear.

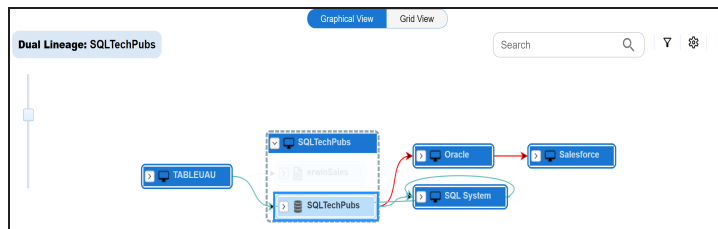

Right-click a path around the selected object to highlight its path of the source or target in the lineage.


Working on Lineage

Lineage of a system shows how metadata moves through systems. It provides a summary of environments used as source and target in a graphical view. Also, it gives you information about the systems and environments involved in the lineage.

Use the following options to work on lineage:


Forward Lineage

Use this option to view forward lineage of the system.

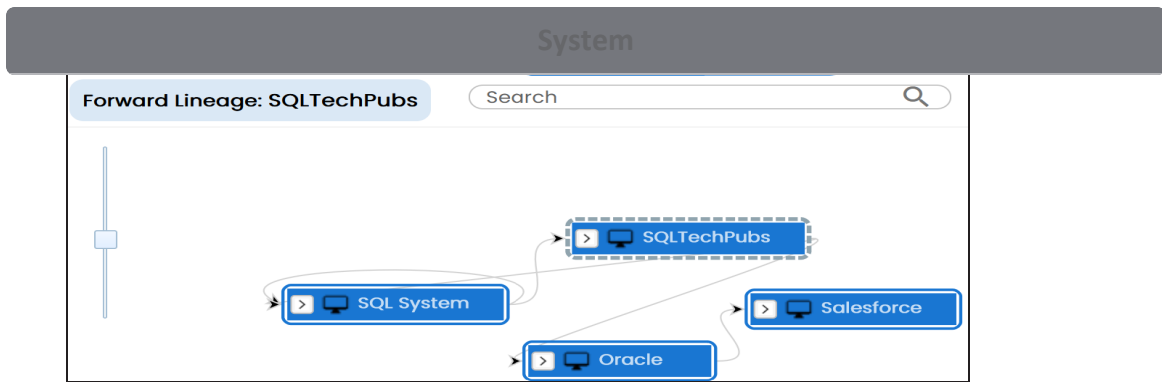


Reverse Lineage

Use this option to view reverse lineage of the system.

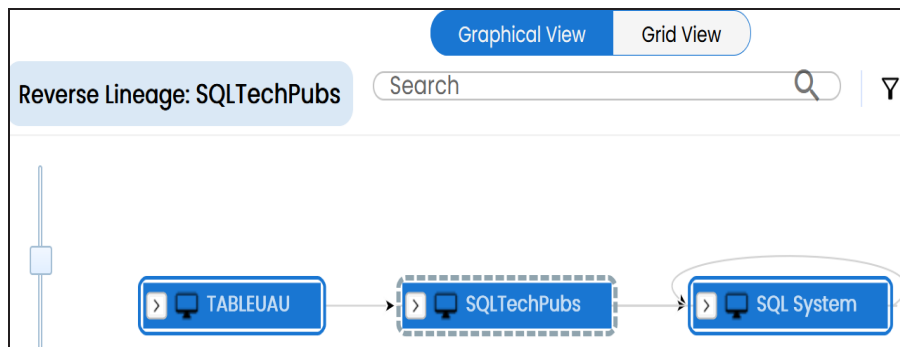

Dual Lineage


Use this option to view dual lineage, which includes both forward and reverse lineage of the system.

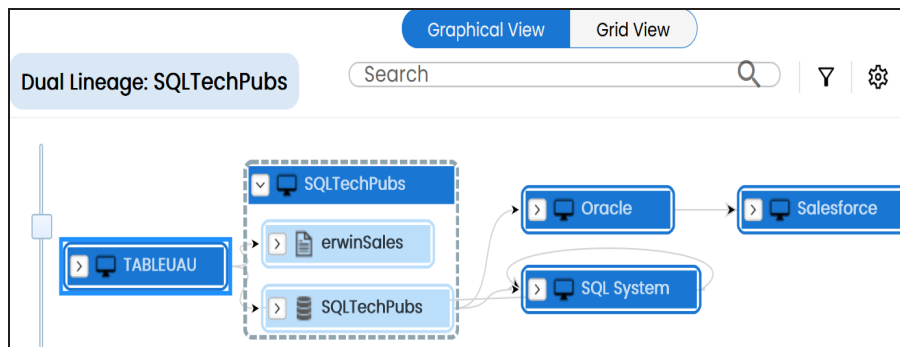

Sensitivity Indicator

System


a system node to view sensitive environments. The sensitive system and environments are indicated using .

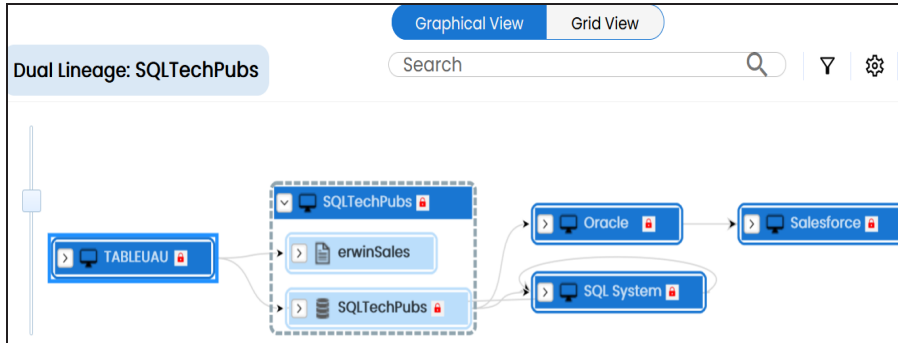

Logical Name

Use this option to view expanded logical names of the tables and columns in an environment in the lineage. You can expand a system node to view environments and tables.


For example, the following image displays the table's logical name in the lineage.

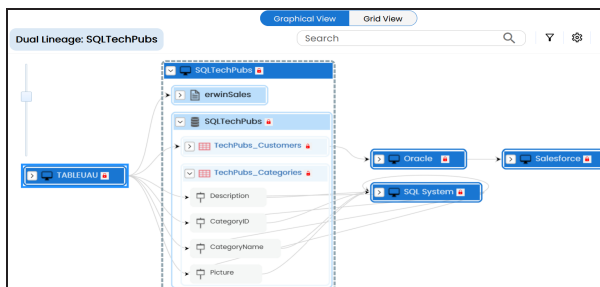

Expanded Logical Name

Use this option to view expanded logical names of the tables and columns in an environment in the lineage. You can expand a system node to view environments, tables, and columns. For more information, on configuring extended properties of a system, refer to the [System](#) topic


For example, the following image displays the table's expanded logical name in the lineage.

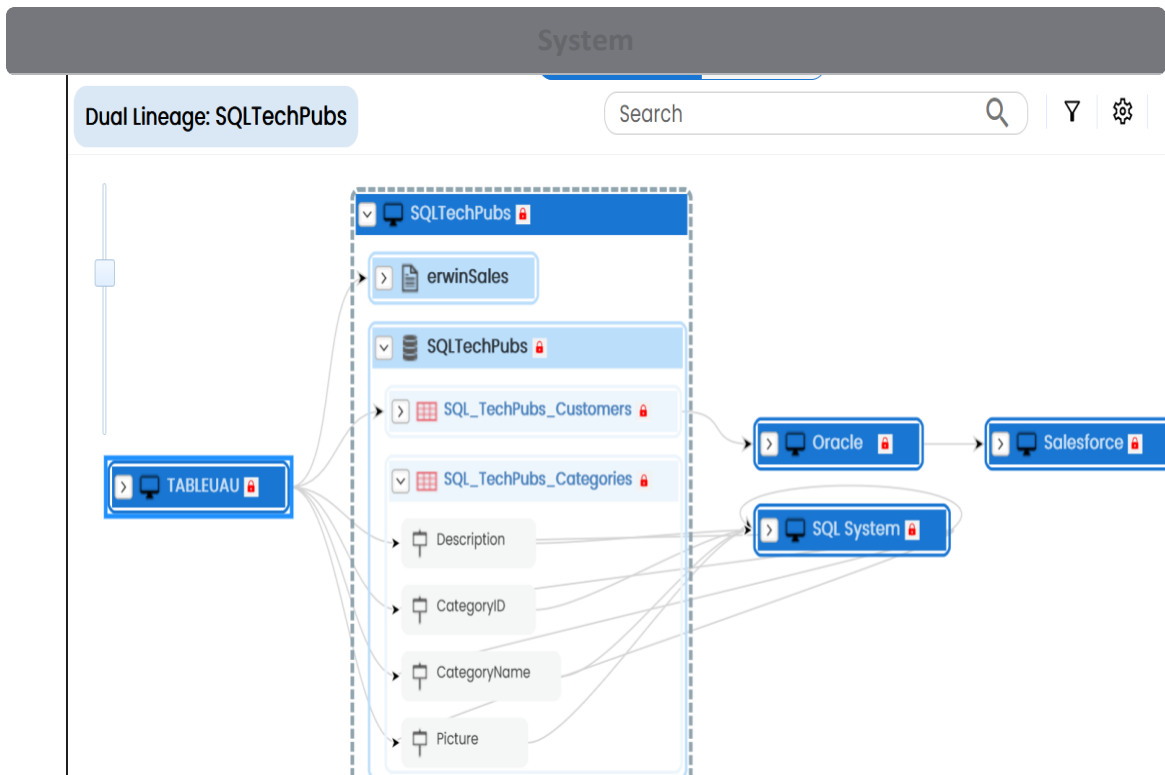

DQ Tool Score

Use this option to view the data quality score of the environments, tables, and columns in the lineage. You can expand a system node to view data quality scores for environments, tables, and columns.


For example, the following image displays the data quality score in the lineage.

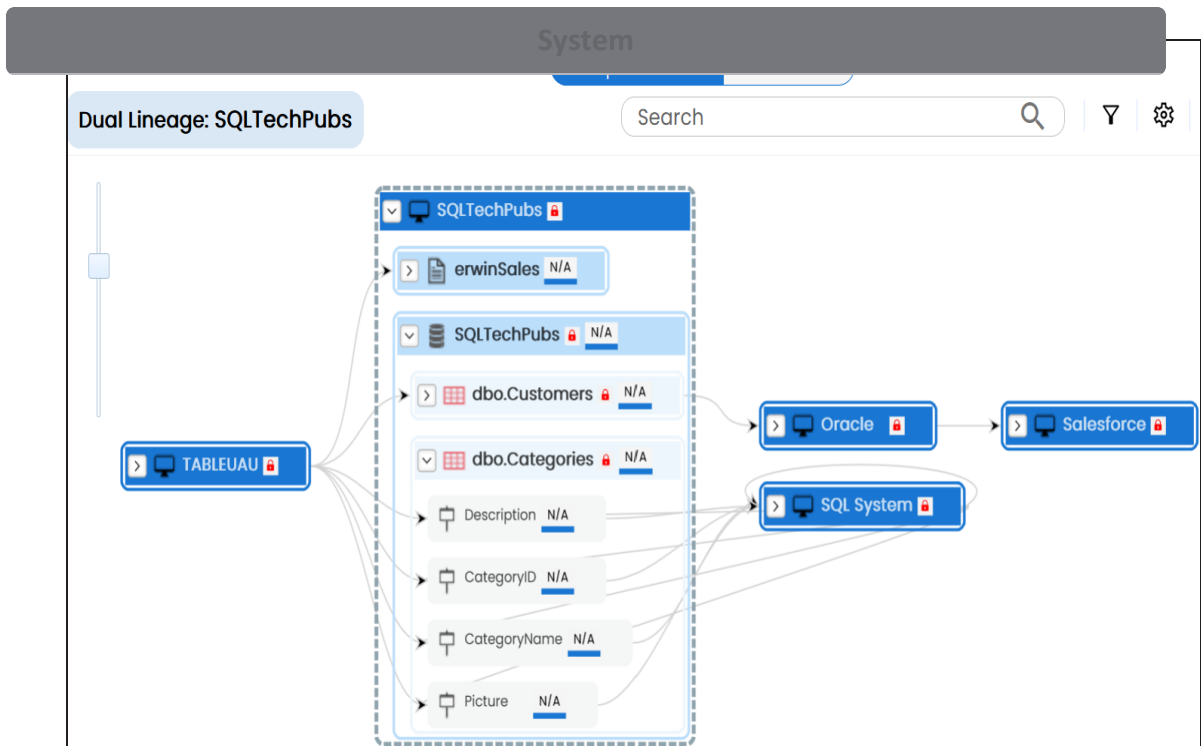

Auto Layout

Use this option to rearrange the layout of the lineage automatically.


For example, the following image displays the rearranged object layout with respect to the previous screenshot.

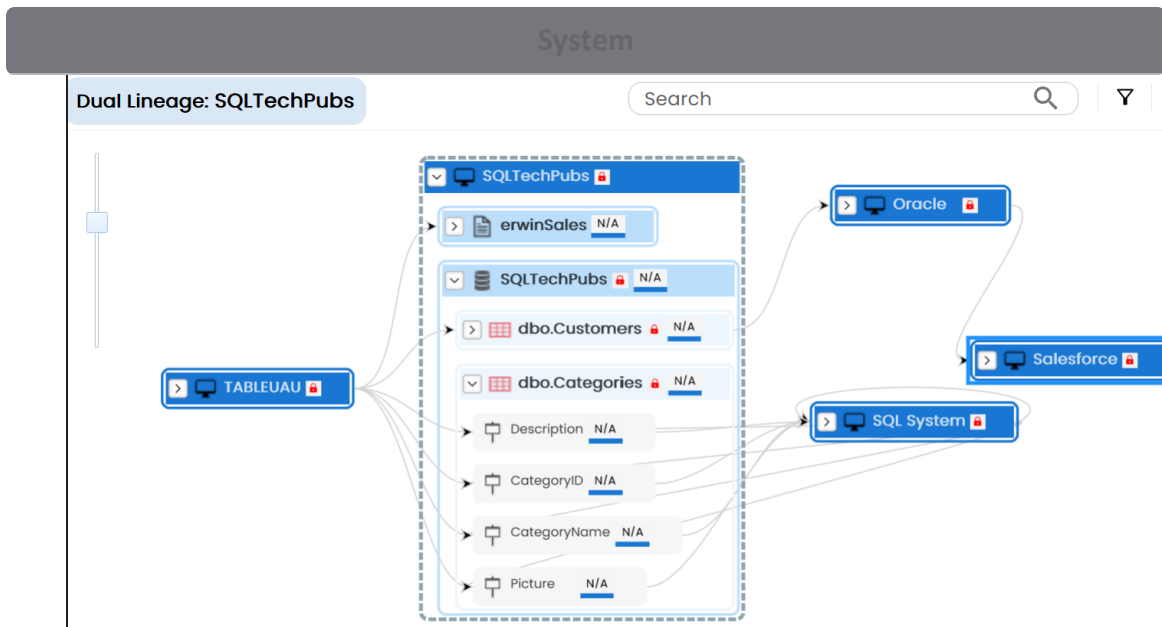

Overview Lineage

Use this option to view the lineage excluding systems and environments that do not exist in the Metadata Manager. When this option is switched off, the views include systems and environments, that do not exist in the Metadata Manager.

For example, the following image displays lineage excluding assets that do not exist in Metadata Manager.

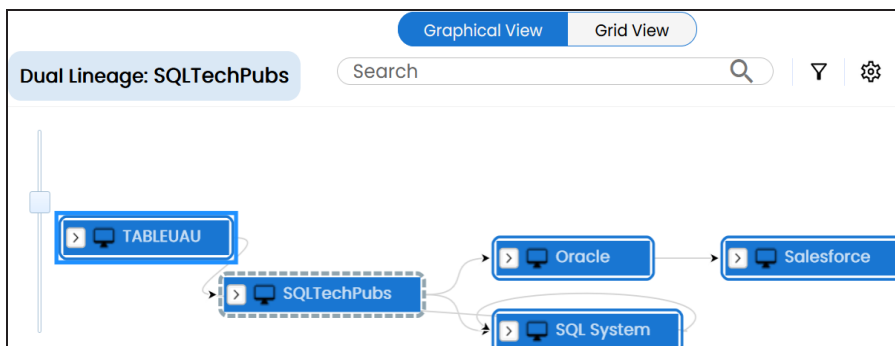

Overview Pane

Use this option to remove the lineage overview pane from the graphical view.

Environment

You can run forward and reverse lineage analysis to trace metadata at the environment level. Forward lineage analysis generates lineage with the environment as source. And, reverse lineage analysis generates lineage with the environment as target. The Dual-Combined View lineage analysis generates a lineage, which includes both forward and reverse lineage.

This topic walks you through the following:

- [Viewing Lineage](#)
- [Working on Lineage](#)

Viewing Lineage

To run lineage at the environment level, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click the required mapping.

The Mapping Specification grid appears.

Mapping Specification										Graphical Designer	Test Specification	Workflow Log
										Profiles: Mapping_Designer_Profile		
#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable Flag			
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0	0	☐			
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nvarchar	40	0	0	☐			
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nvarchar	30	0	0	☒			
4	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactTitle	nvarchar	30	0	0	☒			
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60	0	0	☒			
6	SQLTechPubs	SQLTechPubs	dbo.Customers	City	nvarchar	15	0	0	☒			

3. Select a row.

The options available for Lineage Analyzer appear.

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Length
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5
2	SQLTechPubs	SQLTechPu		yName	nvarchar	40
3	SQLTechPubs	SQLTechPu		ame	nvarchar	30
4	SQLTechPubs	SQLTechPu				


Font Color
 Font Styles
 Background Color
 Font Size
 Clear Formatting
 Impact Analysis Report
 Lineage Analyzer
 Extended Properties
 Share Link

Forward
 Reverse
 Dual - Combined View

5. Hover over any one of the following:

- **Forward:** Use this option to view forward lineage.
- **Reverse:** Use this option to view reverse lineage.
- **Dual - Combined View:** Use this option to view combined forward and reverse lineage.

For example, when you hover over Reverse, All Projects and By Project appear as options.

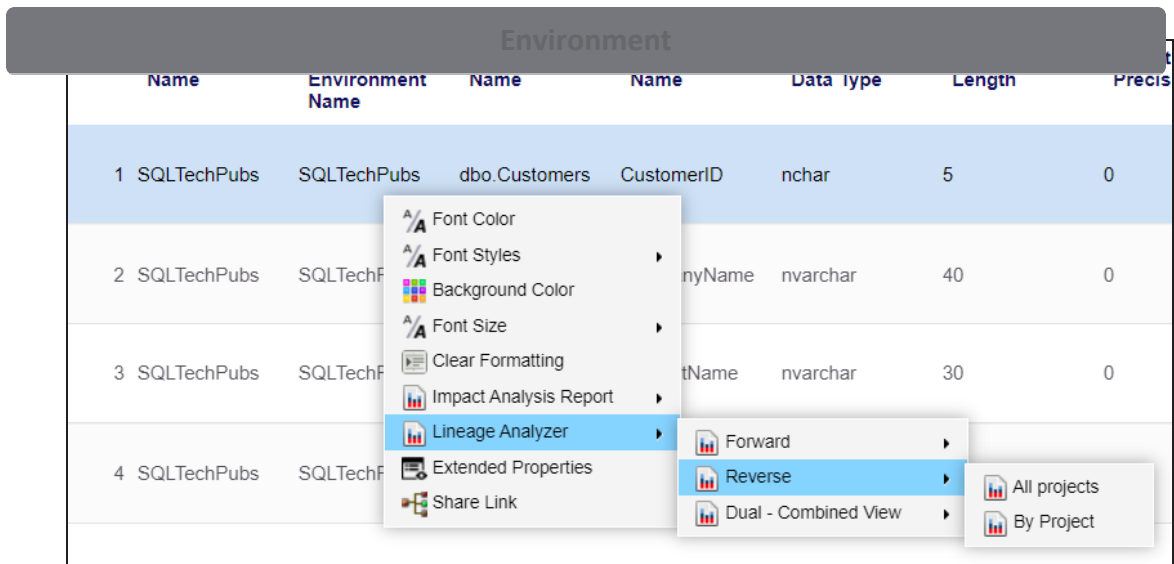


6. Use the following options:

All Projects

Use this option to include all the projects in lineage analysis.


By Project

Use this option to select projects for lineage analysis.

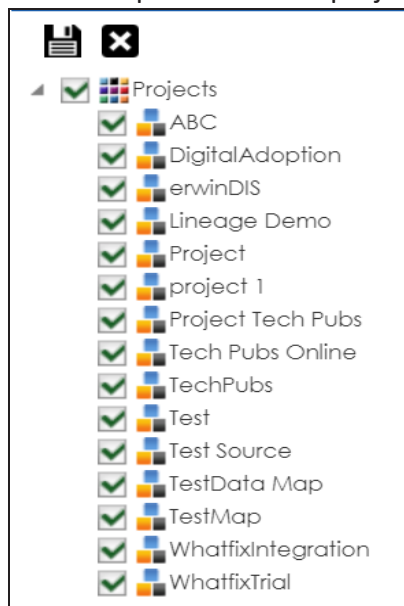


are not required. Then, click .

The environment's reverse lineage is generated based on the options you selected. Similarly, you can generate forward, and dual lineage for an environment. By default, the lineage appears in Graphical View.

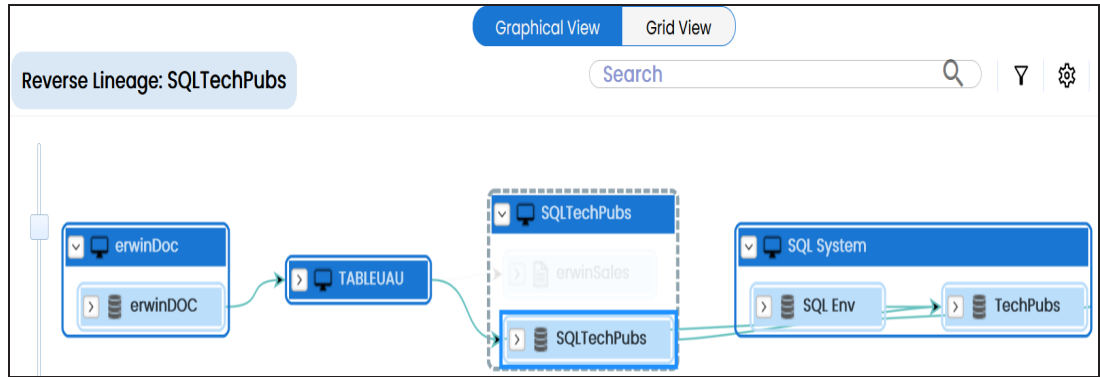

7. You can click **Graphical View** or **Grid View** to switch between them:

- **Graphical View:** The graphical view displays the lineage of the environment in a graphical format. Selecting an environment on the graphical view displays its Legends. Hovering over an environment displays an  icon. Clicking this icon opens the object's properties.

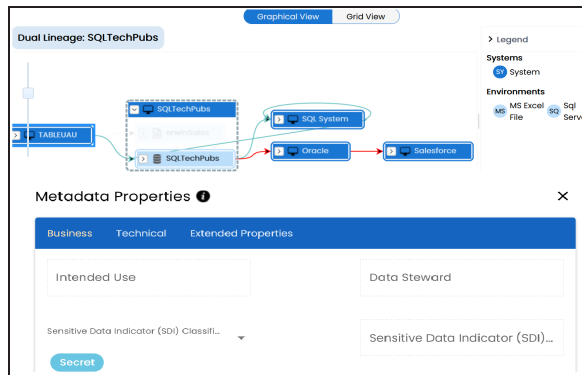

- **Grid View:** The grid view displays the lineage of the environment system in a tabular format. You can view the source and target system and environment


Environment

SQLTechPubs			
Graphical View Grid View			
Dual Lineage: SQLTechPubs → SQLTechPubs			
#	Source System Name	Source Environment Name	Target System Name
1	SQLTechPubs	SQLTechPubs	SQL System
2	SQL System	Northwind	SQL System
3	SQL System	TechPubs	SQL System
4	SQLTechPubs	SQLTechPubs	Oracle
5	TABLEUAU		SQLTechPubs
			SQLTechPubs

Use the following options to work on the lineage in graphical view:

Search (🔍)

Use this option to search for environments that you want to see on the lineage. Type in the search box to see a list of related environments that are available on the lineage.

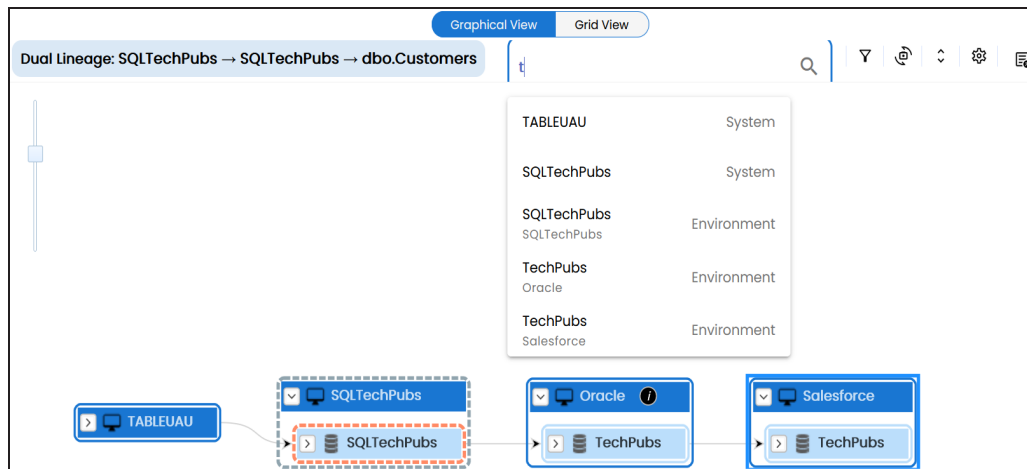


Filter Objects (⌵)

Use this option to filter and display required environments in the lineage view.




The unselected objects are replaced with black dots on the lineage diagram.

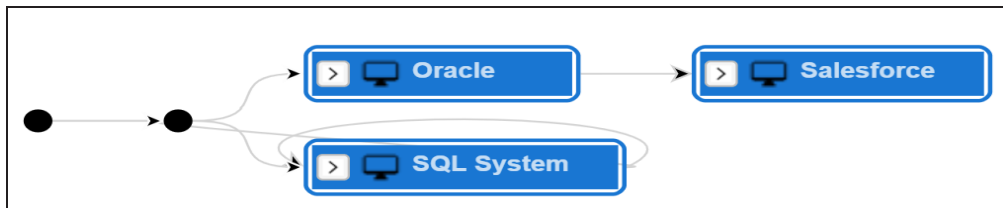

Switch View ()

Double-click an object to see Switch View option. Use this option to switch the level of objects displayed and see the system, environment, or table in which the object is located.

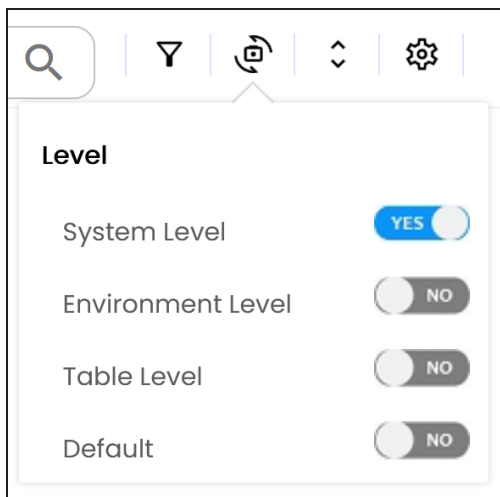

Options ()

options. For more information on lineage options, refer to the [Working on Lineage](#) section.

Lineage Options	
Forward Lineage	☐ NO
Reverse Lineage	☐ NO
Dual Lineage	☒ YES
Business Properties	
Sensitivity Indicator	☐ NO
Logical Name	☐ NO
Expanded Logical Name	☐ NO
DQ Score	☐ NO
Customization Options	
Auto Layout	☒ YES
Overview Lineage	☒ YES
Overview Pane	☐ NO


Export (📄)

Use this option to export the lineage. Click and use the following options:

- **Image (🖼️)**: Use this option to download the lineage as an image, in the .JPG format. Ensure that you expand the required nodes in a lineage before downloading the lineage as image.
- **PDF (📄)**: Use this option to download the lineage report in the .PDF format. Ensure that you expand the required nodes in a lineage before downloading the lineage report as PDF.
- **Excel (📊)**: Use this option to download the lineage report in the .XLSX format. Ensure that you expand the required nodes in a lineage before downloading the report.

On the lineage, expand a system node, and select a table to view its lineage path. The environment is highlighted in blue color, its forward lineage path appears in red, and its reverse lineage path appears in blue. Systems and

Environment

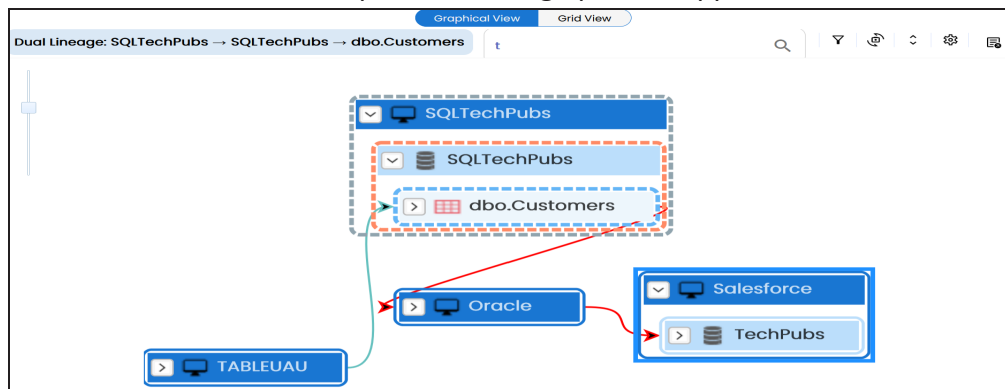

Right-click a path around the selected object to highlight its path of the source or target in the lineage.


Working on Lineage

Lineage of an environment shows how metadata moves through environments. It provides a summary of tables used as source and target. Also, it gives information about the environments and tables involved in the lineage.

Use the following options to work on lineage:


Forward Lineage

Use this option to view forward lineage of the environment.

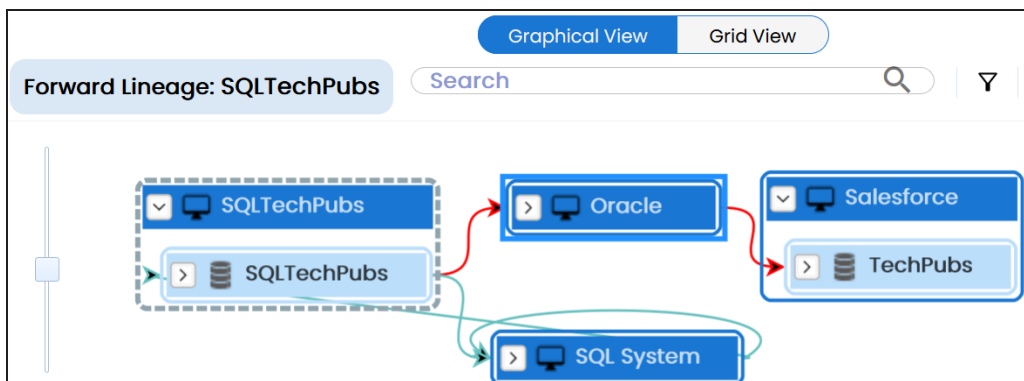


Reverse Lineage

Use this option to view reverse lineage of the environment.

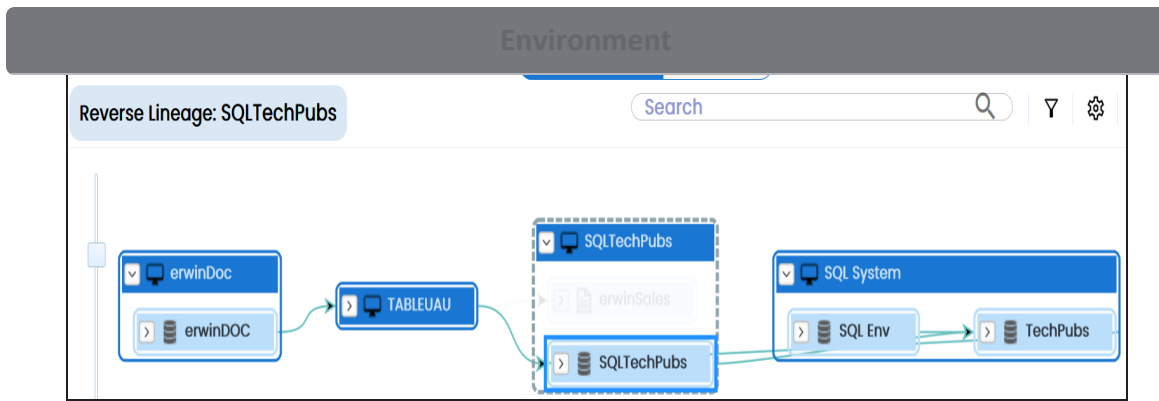


Dual Lineage

Use this option to view dual lineage, which includes both forward and reverse lineage of the environment.

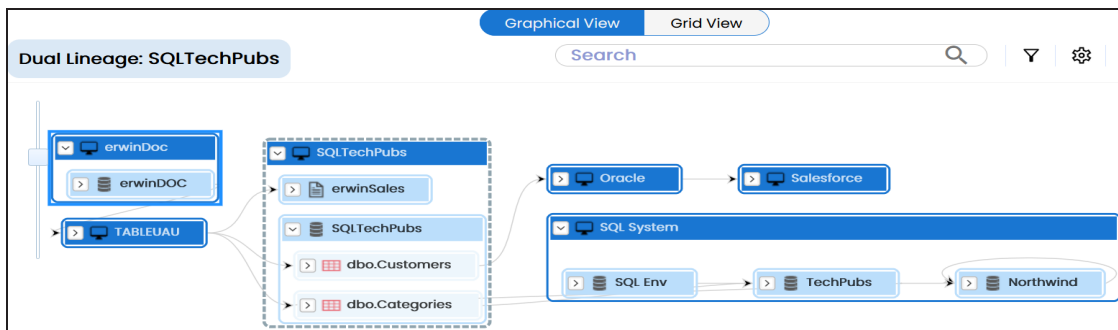

Sensitivity Indicator


Use this option to view sensitivity of the environments in the lineage. You can expand the environment node to view sensitive tables. The sensitive assets are indicated using .

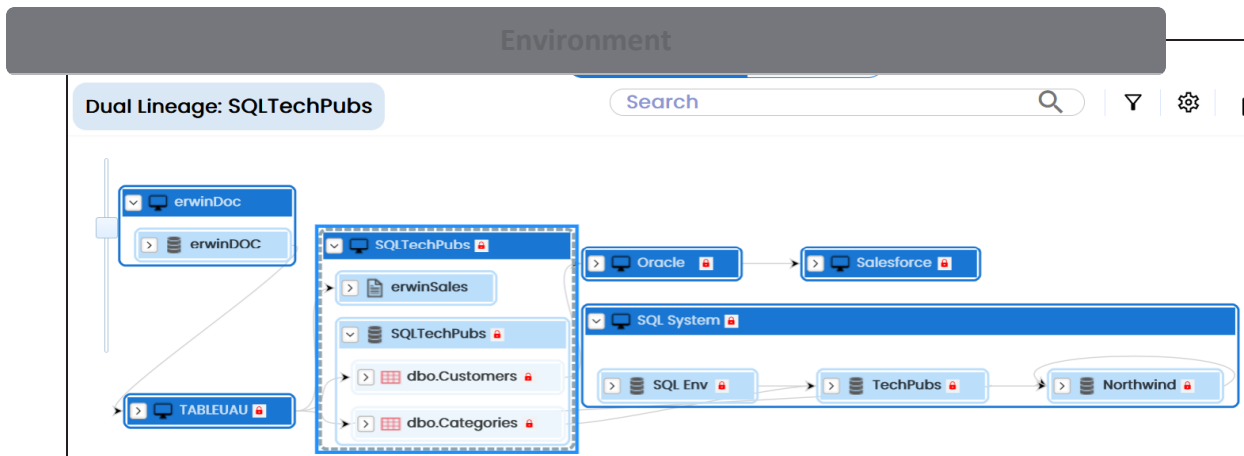

Logical Name

Use this option to view expanded logical names of the tables and columns in an environment in the lineage. You can expand a system node to view environments and tables.

For example, the following image displays the table's logical name in the lineage.

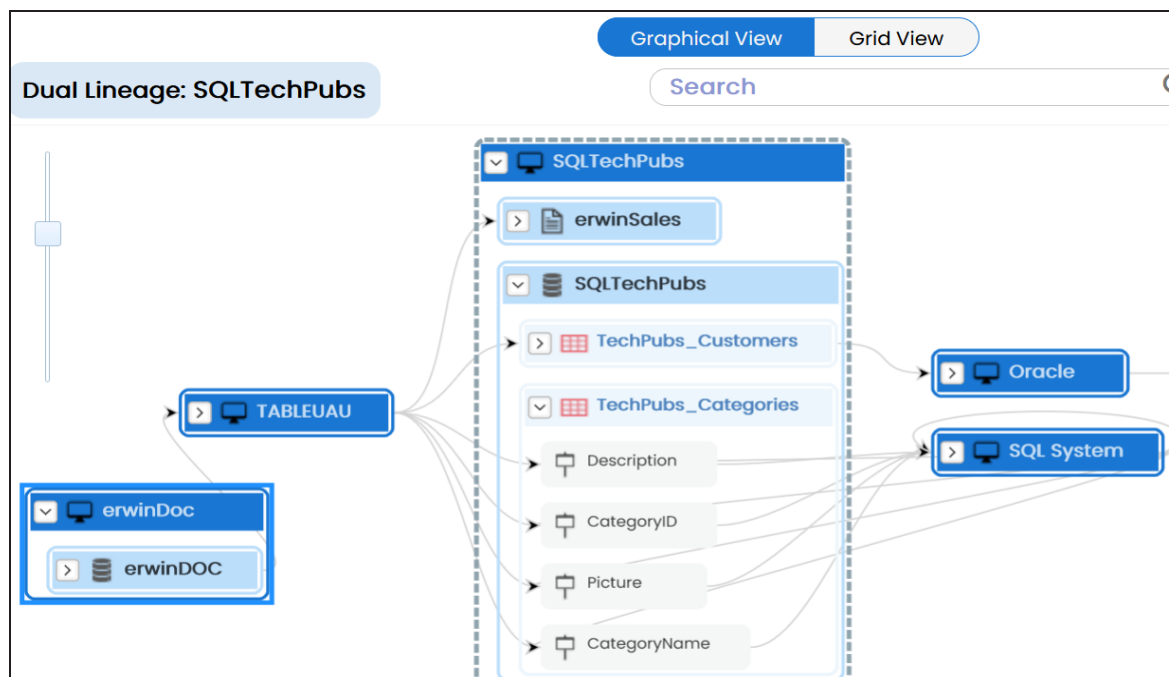


Expanded Logical Name

Environment

onment in the lineage. You can expand a system node to view environments, tables, and columns.


For example, the following image displays the table's expanded logical name in the lineage.

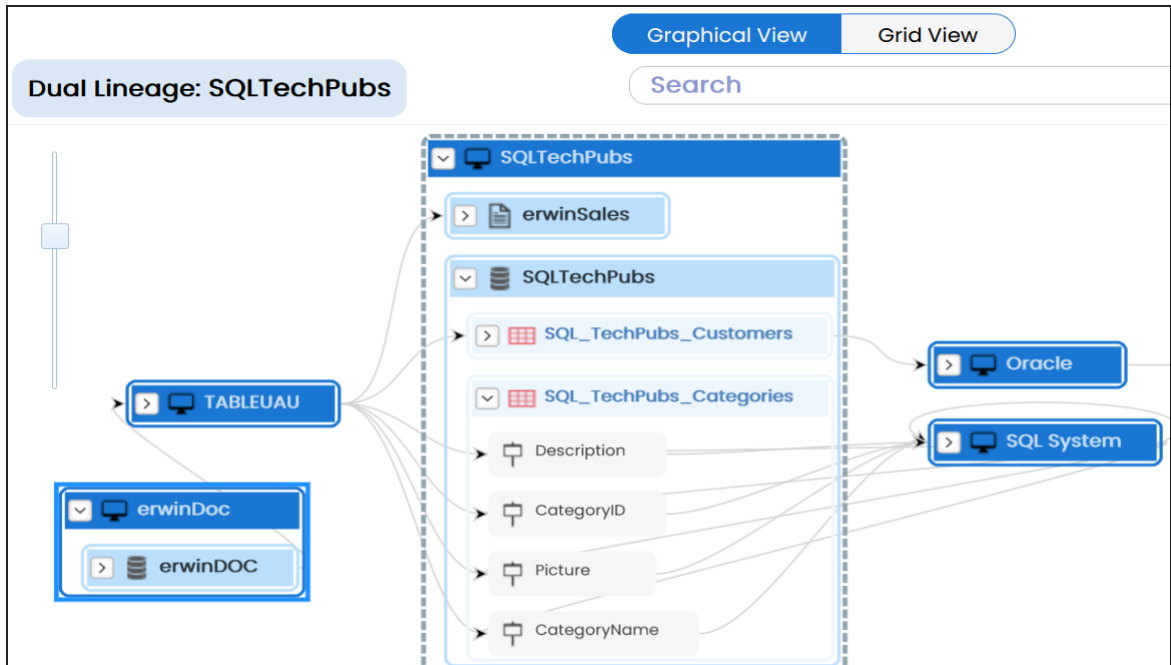

DQ Tool Score

Use this option to view the data quality score of the environments, tables, and columns in the lineage. You can expand a system node to view data quality scores for environments, tables, and columns.


For example, the following image displays the data quality score in the lineage.

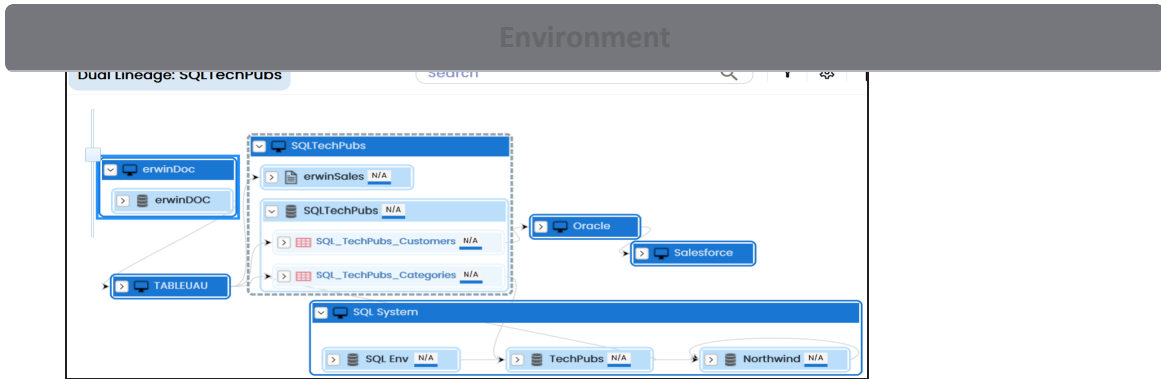

Auto Layout

Use this option to rearrange the layout of the lineage automatically.


For example, the following image displays the rearranged object layout with respect to the previous screenshot.

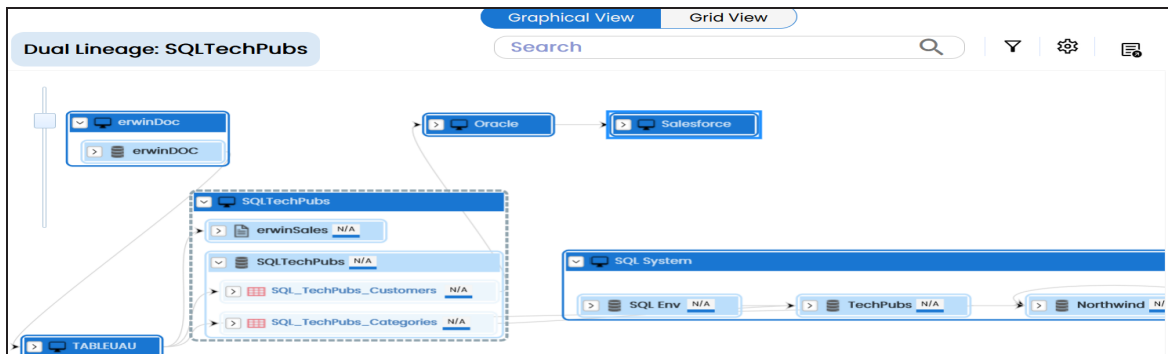

Overview Lineage

Use this option to view the lineage excluding systems and environments that do not exist in the Metadata Manager. When this option is switched off, the views include systems and environments, that do not exist in the Metadata Manager.

For example, the following image displays lineage excluding assets that do not exist in Metadata Manager.

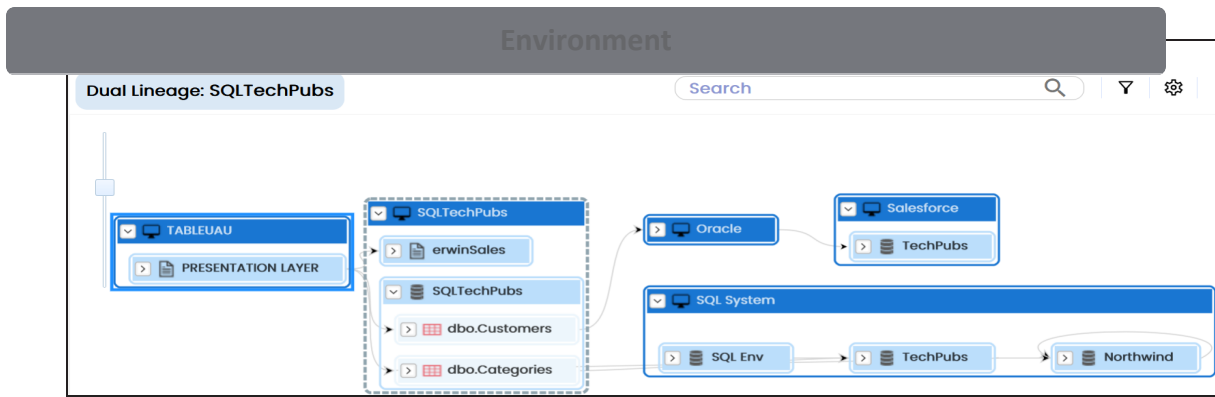

Overview Pane

Use this option to remove the overview pane from the graphical view.

Table

You can run forward and reverse lineage analysis to trace metadata at the table level. Forward lineage analysis generates lineage with the table as source. And, reverse lineage analysis generates lineage with the table as target. The Dual-Combined View lineage analysis generates a lineage, which includes both forward and reverse lineage.

This topic walks you through the following:

- [Viewing Lineage](#)
- [Working on Lineage](#)

Viewing Lineage

To run lineage at the table level, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click the required mapping.

The Mapping Specification grid appears.

Mapping Specification										
[Data Integration]										
#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable Flag	Test Value
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0	0	☐	
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nvarchar	40	0	0	☐	
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nvarchar	30	0	0	☒	
4	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactTitle	nvarchar	30	0	0	☒	
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60	0	0	☒	
6	SQLTechPubs	SQLTechPubs	dbo.Customers	City	nvarchar	15	0	0	☒	

3. Select a row.

Table

The options available for Lineage Analyzer appear.

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0
2	SQLTechPubs	SQLTechPubs	dbo.Customer			40	0
3	SQLTechPubs	SQLTechPubs	dbo.Customer			30	0
4	SQLTechPubs	SQLTechPubs	dbo.Customer				

Font Color
Font Styles
Background Color
Font Size
Clear Formatting
Impact Analysis Report
Lineage Analyzer
Extended Properties
Share Link

Forward
Reverse
Dual - Combined View

5. Hover over any of the following:

- **Forward:** Use this option to view forward lineage.
- **Reverse:** Use this option to view reverse lineage.
- **Dual - Combined View:** Use this option to view combined forward and reverse lineage.

For example, when you hover over Dual - Combined View, All Projects and By Project appear as options.

Table								
	Name	Environment Name	Name	Name	Data type	Length	Precision	Scale
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0	0
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerName	nchar	40	0	0
3	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerAddress	nvarchar	30	0	0
4	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerCity	nchar	30	0	0
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60	0	0


6. Use the following options:

All Projects

Use this option to include all the projects in lineage analysis.


By Project

Use this option to select projects for lineage analysis.

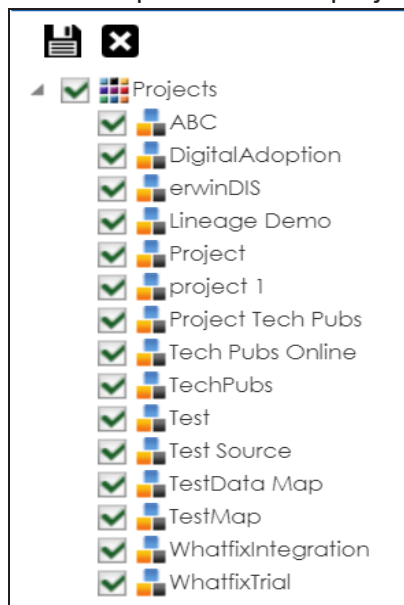


By default, all projects are selected. Clear the check boxes for the projects that are not required. Then, click .

ilarly, you can generate forward, and reverse lineage for tables. By default, the lineage appears in Graphical View.

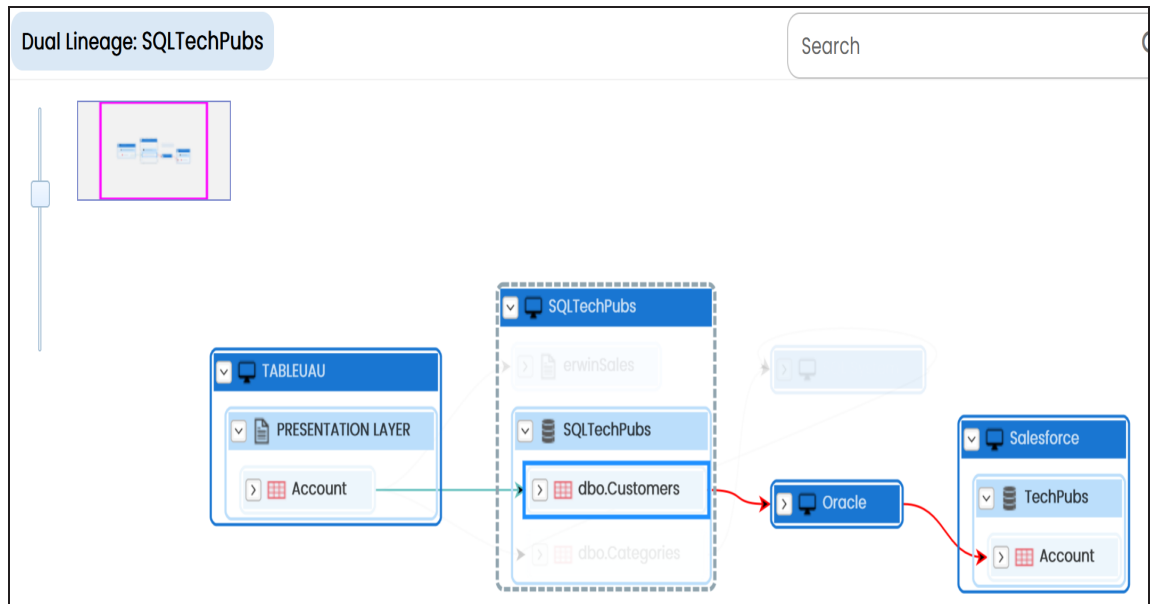

7. You can click **Graphical View** or **Grid View** to switch between them:

- Graphical View:** The graphical view displays the lineage of the table in a graphical format. Selecting a table on the graphical view displays its Legends. Hovering over a table displays an **i** icon. Clicking this icon opens the object's properties. For more information on updating table properties, refer to the [Updating Table Properties](#) topic.

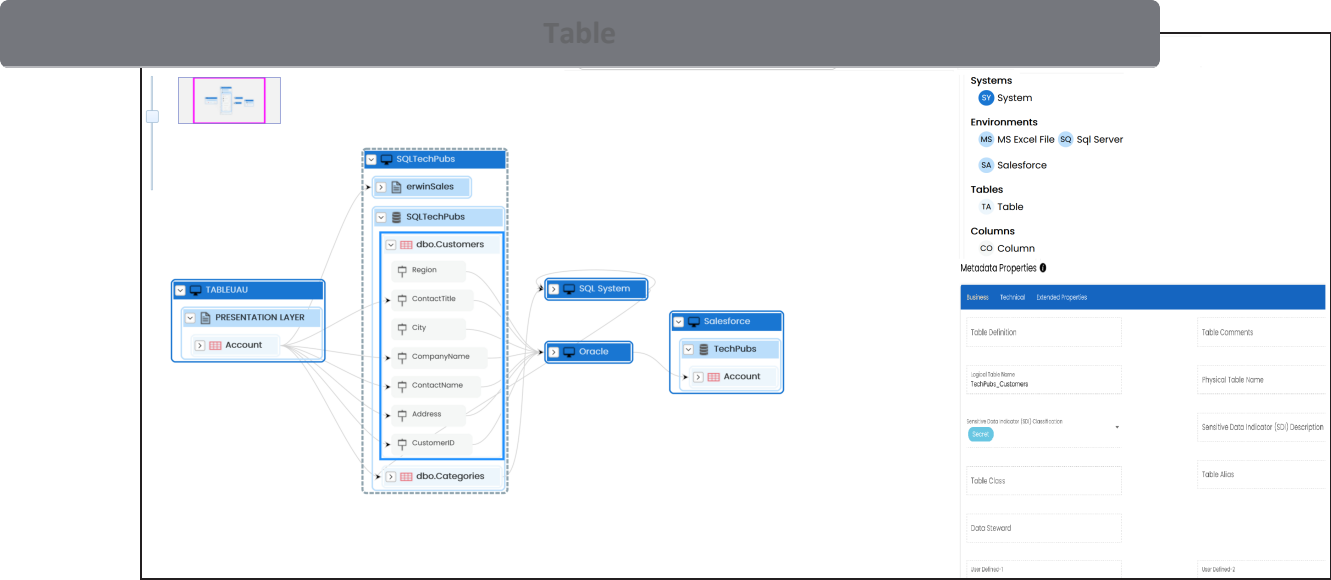

Grid View: The grid view displays the lineage of the table in a tabular format. You can view the source and target system, environment, table, and column associated with the selected table.

dbo.Customers

Graphical View Grid View

Dual Lineage: SQLTechPubs → SQLTechPubs → dbo.Customers


#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Target System Name	Target Environment Name	Target Table Name	Target Column
1	erwinDoc	erwinDOC	CustDetails		TABLEUAU			
2	Oracle				Salesforce	TechPubs	Account	
3	SQLTechPubs	SQLTechPubs	dbo Customers	Address	Oracle			
4	TABLEUAU				SQLTechPubs	SQLTechPubs	dbo Customers	ContactName
5	SQLTechPubs	SQLTechPubs	dbo Customers	ContactName	Oracle			
6	SQLTechPubs	SQLTechPubs	dbo Customers	Region	Oracle			
7	TABLEUAU				SQLTechPubs	SQLTechPubs	dbo Customers	CompanyName

Use the following options to work on the lineage in graphical view:

Search (🔍)

Use this option to search for tables that you want to see on the lineage.

eeage.

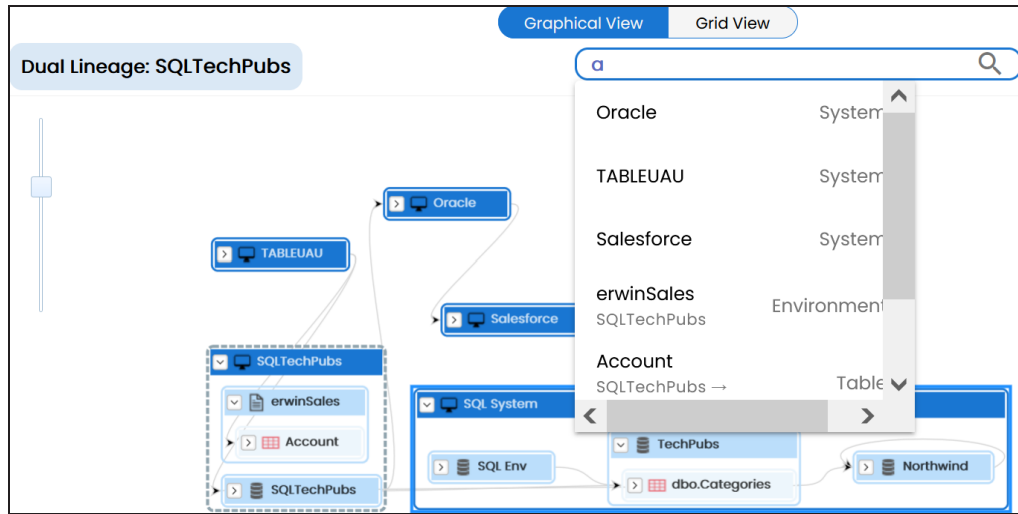

Filter Objects ()


Use this option to filter and display required tables in the lineage view.

Filter Objects





- ▶ ☒ SQLTechPubs
- ☒ Oracle
- ▶ ☒ SQL System
- ☒ TABLEUAU
- ▶ ☒ erwinDoc
- ☒ Salesforce
- ▼ ☐ Table Business Entity Types
 - ☐ TABLE

The unselected objects are replaced with black dots on the lineage diagram.

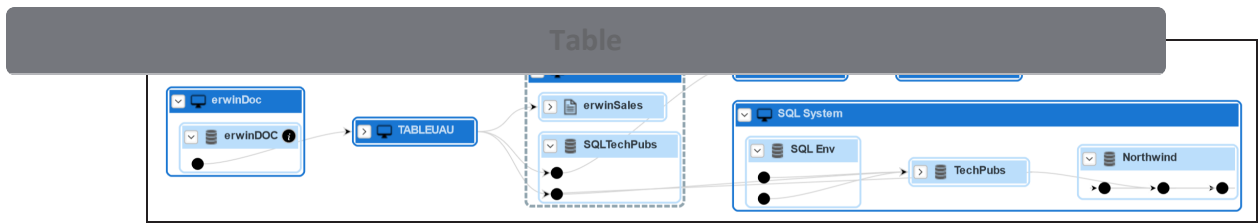

Switch View ()

Double-click an object to see Switch View option. Use this option to switch the level of objects displayed and see the system, environment, or table in which the object is located.

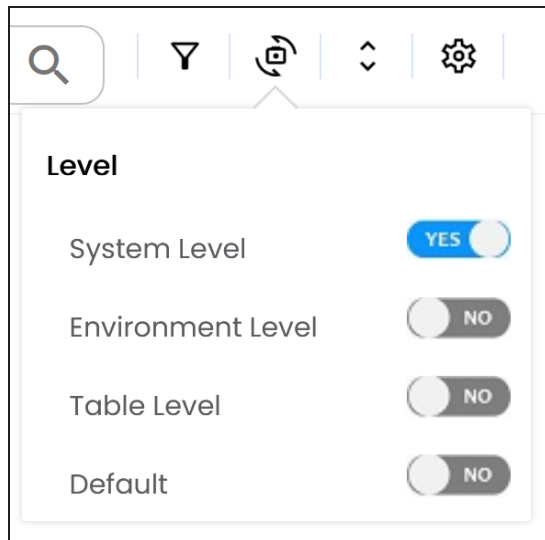

Options ()

Use this option to view lineage types, business properties and customizations options. For more information on lineage options, refer to the [Working on Lineage](#) section.

Table

Lineage Options	
Forward Lineage	☐ NO
Reverse Lineage	☐ NO
Dual Lineage	☒ YES
Business Properties	
Sensitivity Indicator	☐ NO
Logical Name	☐ NO
Expanded Logical Name	☐ NO
DQ Score	☐ NO
Customization Options	
Auto Layout	☒ YES
Overview Lineage	☒ YES
Overview Pane	☐ NO


Export (📄)

Use this option to export the lineage. Click 📄 and use the following options:

- **Image (🖼️)**: Use this option to download the lineage as an image, in the .JPG format. Ensure that you expand the required nodes in a lineage before downloading the lineage as image.
- **PDF (📄)**: Use this option to download the lineage report in the .PDF format. Ensure that you expand the required nodes in a lineage before downloading the lineage report as PDF.
- **Excel (📊)**: Use this option to download the lineage report in the .XLSX format. Ensure that you expand the required nodes in a lineage before downloading the report.

On the lineage, expand a table node, and select a column to view its lineage path. The column is highlighted in blue color, its forward lineage path appears in red, and its reverse lineage path appears in blue. The assets that are not part of a lineage path disappear.


Table

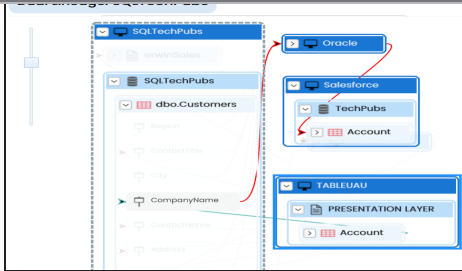

Click a path around the selected object to highlight its path of the source or target in the lineage.

Viewing Transformations

Transformations between columns are indicated using  in the lineage. Hover over  to view transformation rules for the columns on a pop-up. Or, click the path between the columns to highlight it to view detailed transformations between them in the Transformation Details pane.

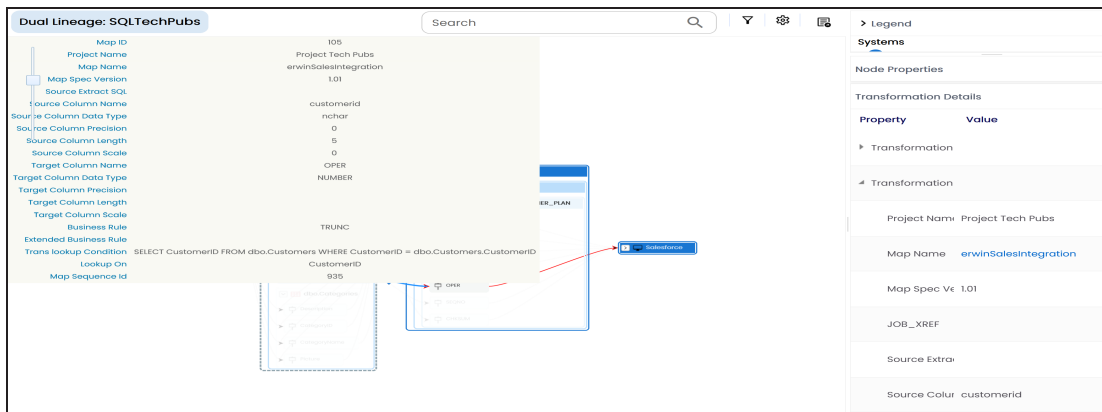


You can expand the transformation node to view the transformation details that includes Business Rule, Extended Business Rule, Trans lookup Condition, Lookup On, and more relevant properties.

Working on Lineage

Lineage of a table shows how metadata moves through tables. It provides a summary of columns used as source and target. Also, it gives you information about the technical and business properties of columns involved in the lineage.


Forward Lineage

Use this option to view forward lineage of the table.

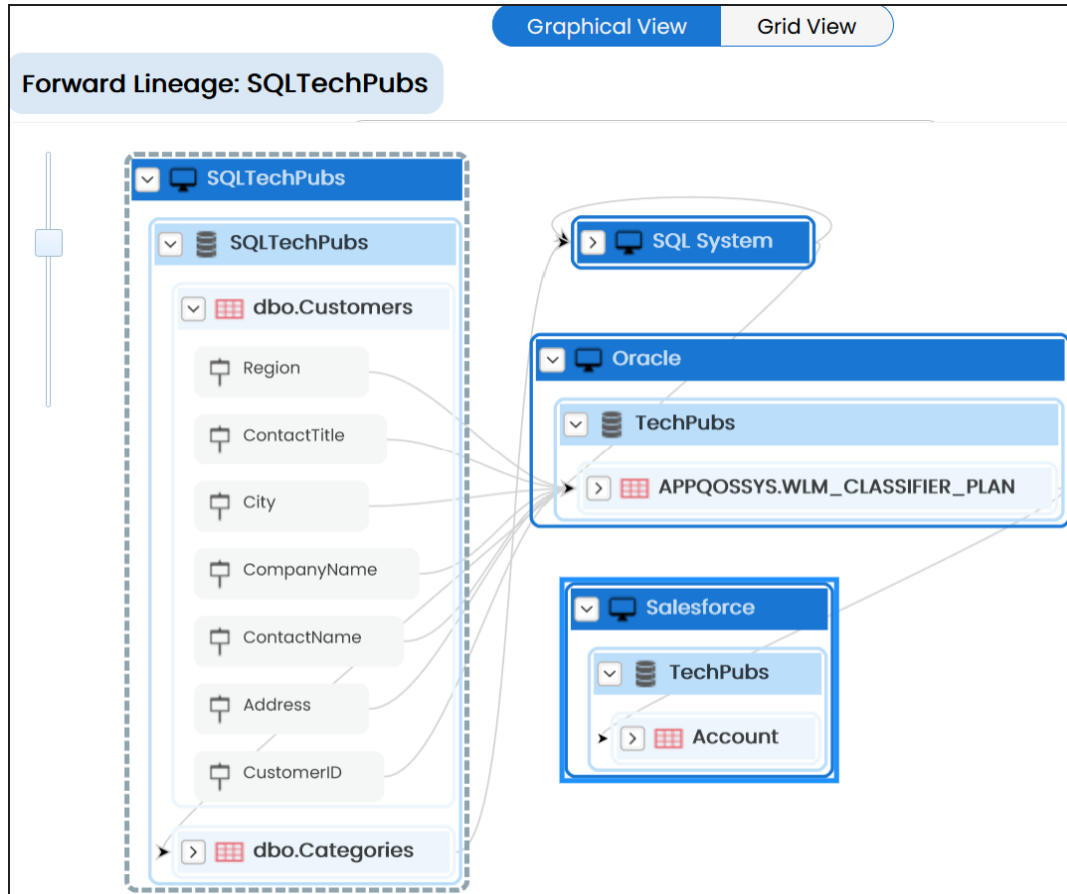


Reverse Lineage

Use this option to view reverse lineage of the table.

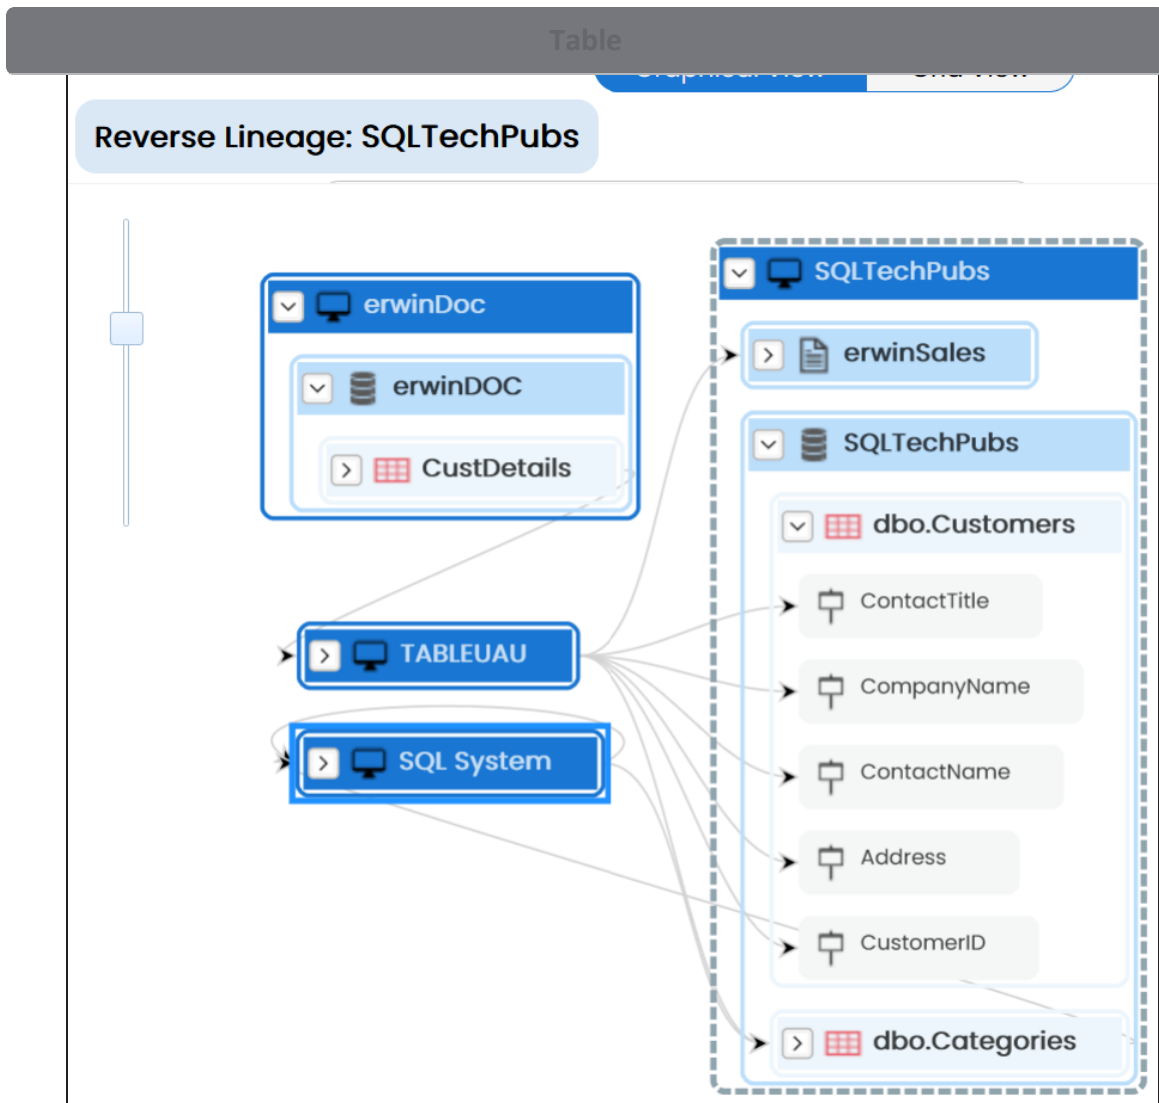

Dual Lineage


Use this option to view dual lineage, which includes both forward and reverse lineage of the table.

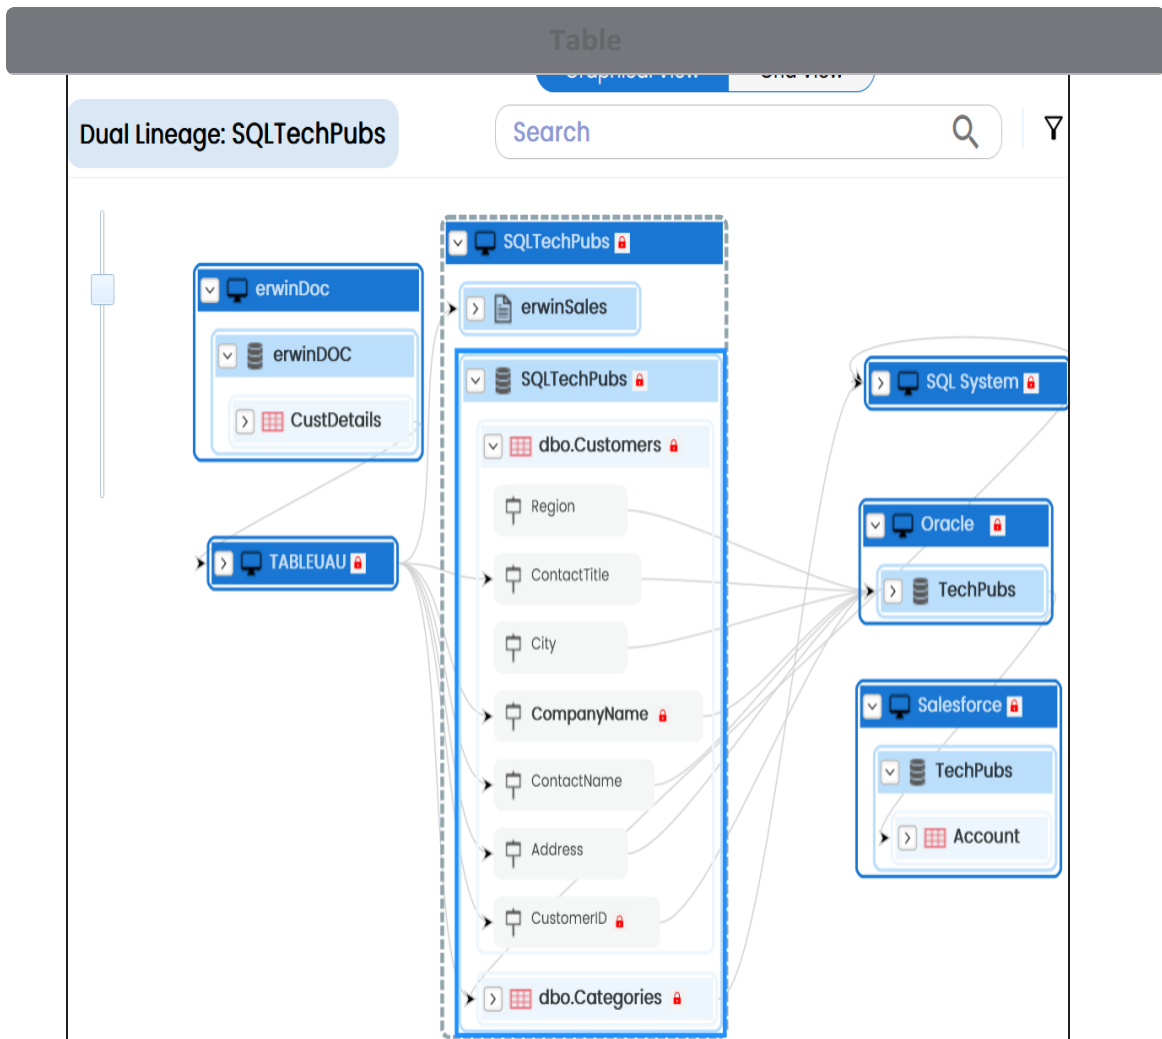

Sensitivity Indicator

Use this option to view sensitivity of the table in the lineage. You can expand the table node to view sensitive columns. The sensitive assets are indicated using 🔒.


Table

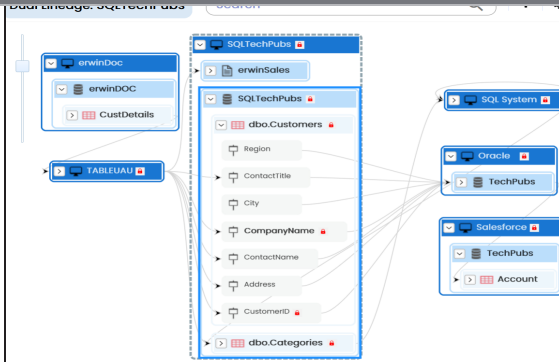

Logical Name

Use this option to view expanded logical names of the tables and columns in an environment in the lineage. You can expand a system node to view environments and tables.

For example, the following image displays the table's logical name in the lineage.

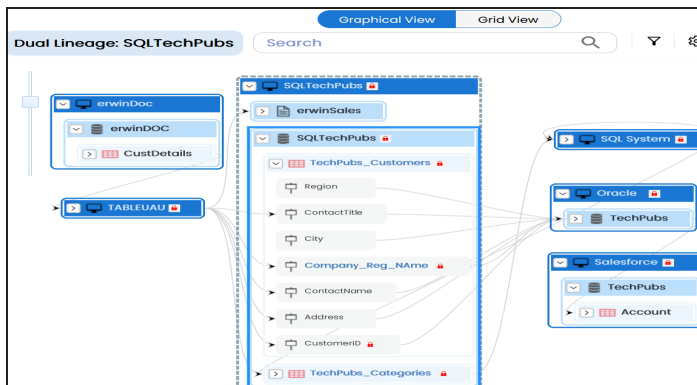


Expanded Logical Name

Use this option to view expanded logical names of the tables and columns in an environment in the lineage. You can expand a system node to view environments, tables, and columns. For more information on configuring extended properties of tables, refer to the [Configuring Extended Properties](#) topic.

For example, the following image displays the table's expanded logical name in the lineage.


Table

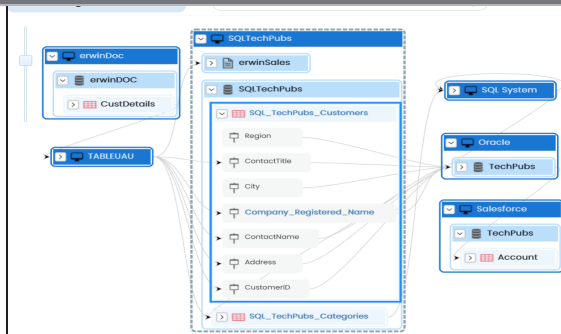

DQ Tool Score

Use this option to view the data quality score of the environments, tables, and columns in the lineage. You can expand a system node to view data quality scores for environments, tables, and columns.

For example, the following image displays the data quality score in the lineage.

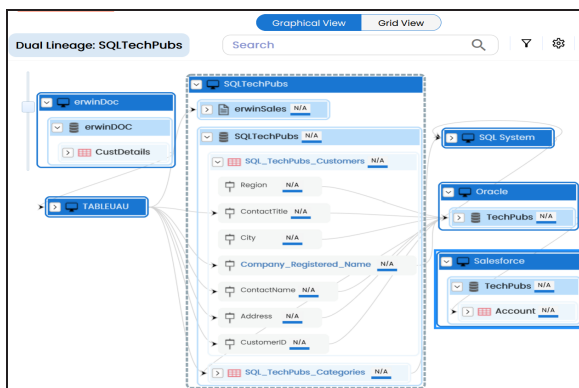


Auto Layout

Use this option to rearrange the layout of the lineage automatically.

For example, the following image displays the rearranged object layout with respect to the previous screenshot.


Table

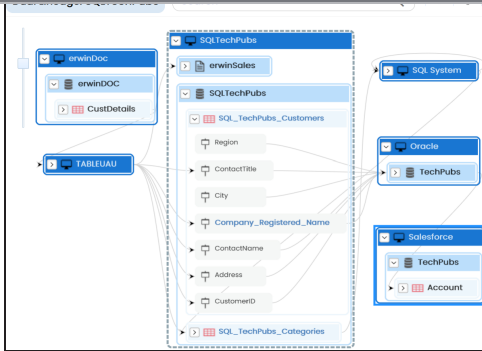

Overview Lineage

Use this option to view the lineage excluding systems and environments that do not exist in the Metadata Manager. When this option is switched off, the views include systems and environments, that do not exist in the Metadata Manager.

For example, the following image displays lineage excluding assets that do not exist in Metadata Manager.

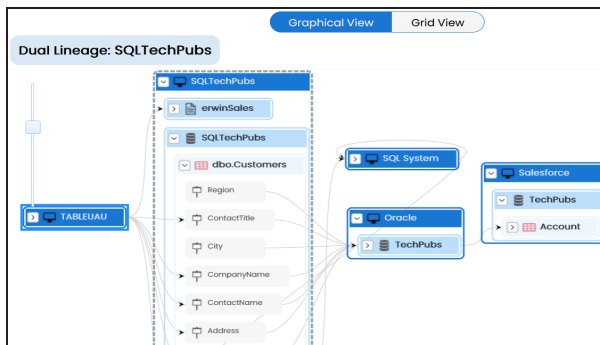

Overview Pane

Use this option to remove the lineage overview pane from the graphical view.

Column

You can run forward and reverse lineage analysis to trace metadata at the column level. Forward lineage analysis generates a lineage with the column as source. And, reverse lineage analysis generates a lineage with the column as target. The Dual-Combined View lineage analysis generates a lineage, which includes both forward and reverse lineage.

This topic walks you through the following:


- [Viewing Lineage](#)
- [Working on Lineage](#)

Viewing Lineage

To run lineage at the column level, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click the required mapping.

The Mapping Specification grid appears.

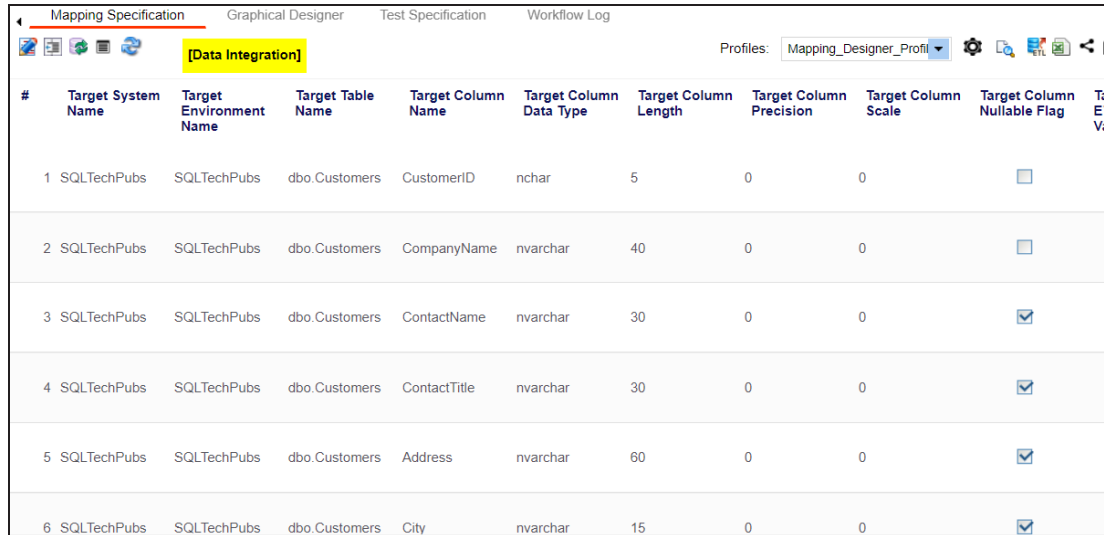

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable Flag
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0	0	☐
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nvarchar	40	0	0	☐
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nvarchar	30	0	0	☒
4	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactTitle	nvarchar	30	0	0	☒
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60	0	0	☒
6	SQLTechPubs	SQLTechPubs	dbo.Customers	City	nvarchar	15	0	0	☒

3. Select a row.

Column

The options available for Linear Analyzer appear.

#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0	0
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nchar	40	0	0
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nchar	30	0	0
4	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactTitle	nchar	60	0	0
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60	0	0

5. Hover over any one of the following:

- **Forward:** Use this option to view forward lineage.
- **Reverse:** Use this option to view reverse lineage.
- **Dual - Combined View:** Use this option to view forward and reverse lineage of the column combined together.

For example, when you hover over the Reverse, All Projects and By Project appear as options.


#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5	0	0
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nchar	40	0	0
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nchar	30	0	0
4	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactTitle	nchar	60	0	0

All Projects

Use this option to include all the projects in lineage analysis.


By Project

Use this option to select projects for lineage analysis.

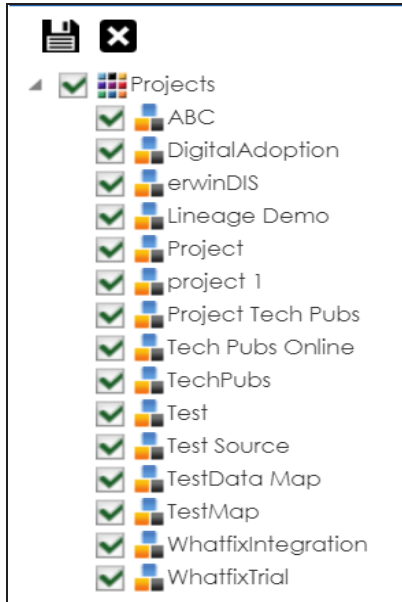


By default, all the projects are selected. Clear the check boxes for the projects that are not required. Then, click .

The column's reverse lineage is generated based on the options you selected. Similarly, you can generate forward, and dual lineage for columns. By default,

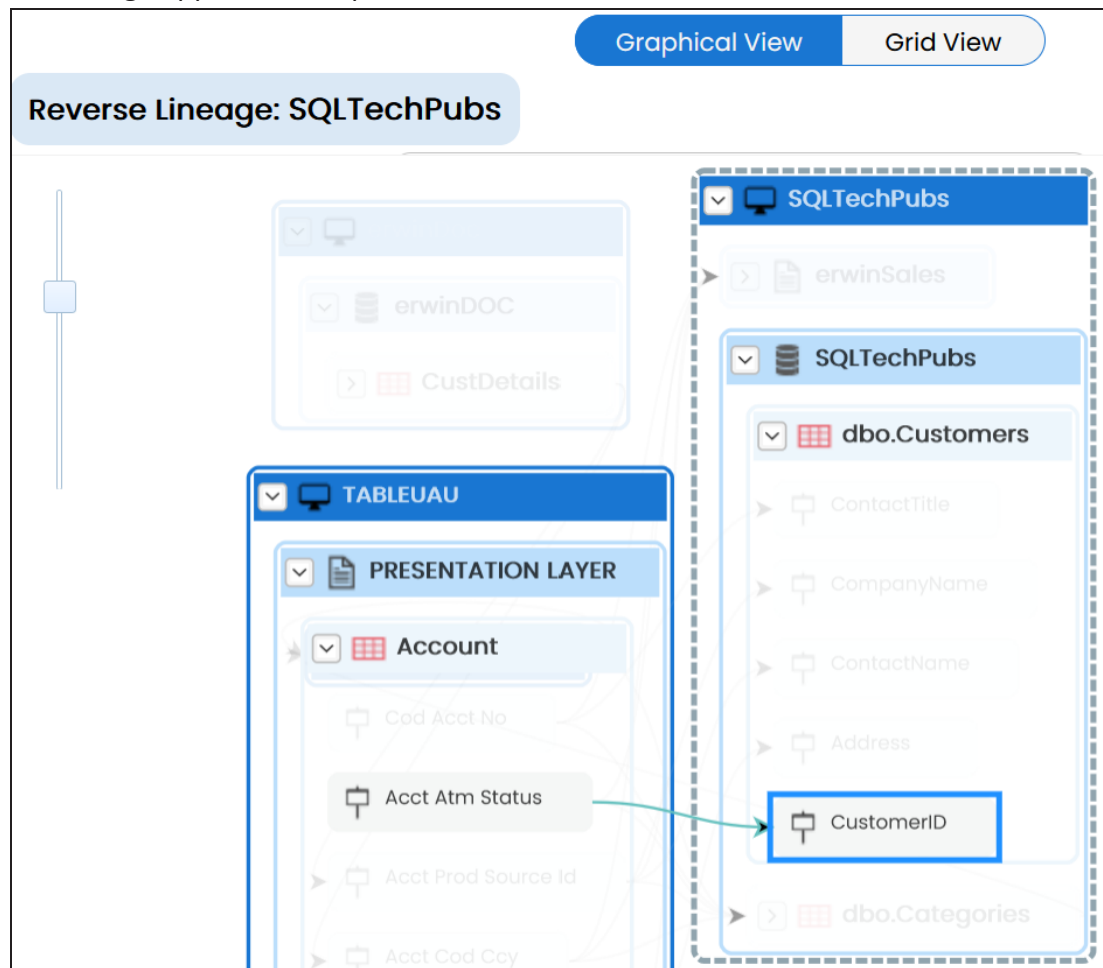

7. You can click **Graphical View** or **Grid View** to switch between them:
- Graphical View:** The graphical view displays the lineage of the column in a graphical format. Selecting a column on the graphical view displays its Legends. Hovering over a column displays an **i** icon. Clicking this icon opens the object's properties. For more information on updating column properties, refer to the [Updating Column Properties](#) topic.

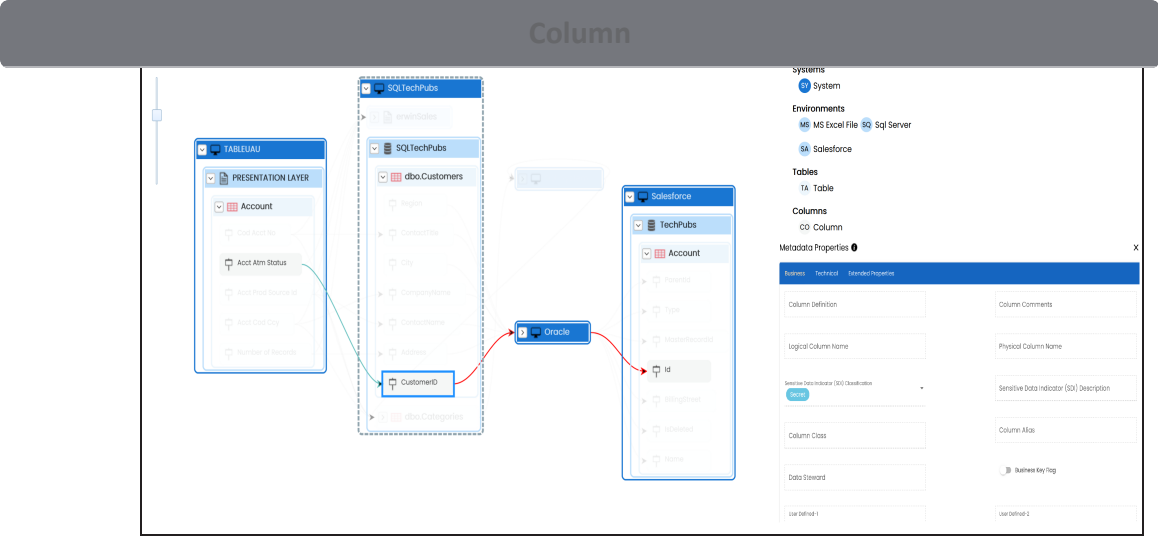

Grid View: The grid view displays the lineage of the environment system in a tabular format. You can view the source and target system, environment, table, and column associated with the selected column.

CustomerID

Graphical ViewGrid View

Dual Lineage: SQLTechPubs → SQLTechPubs → dbo.Customers → CustomerID


#	Info	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Target System Name	Target Environment Name
1		TABLEUAU	PRESENTATION LAYER	Account	Acct Atm Status	SQLTechPubs	SQLTechPubs
2		SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	Oracle	TechPubs
3		Oracle	TechPubs	APPQOSSYS.WLM_CLA SSIFIER_PLAN		Salesforce	TechPubs

Use the following options to work on the lineage in graphical view:

Search (🔍)


Use this option to search for columns that you want to see on the lineage.

Type in the search box to see a list of related columns that are available on the lineage.

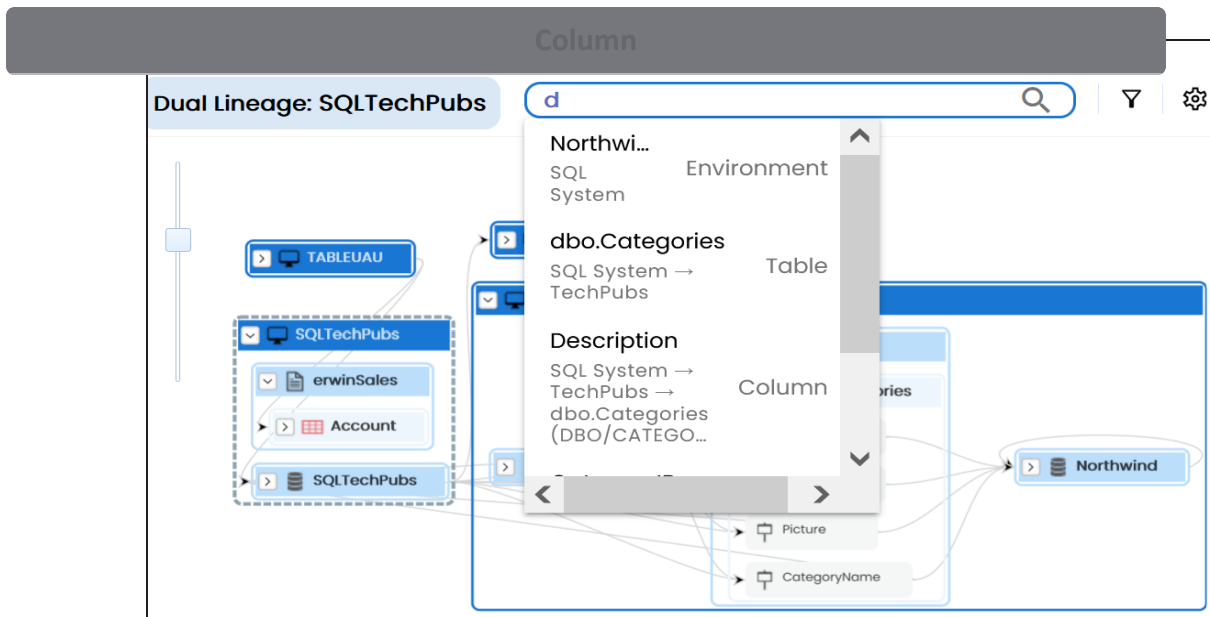


Filter Objects ()

Use this option to filter and display required columns in the lineage view.




The unselected objects are replaced with black dots on the lineage diagram.

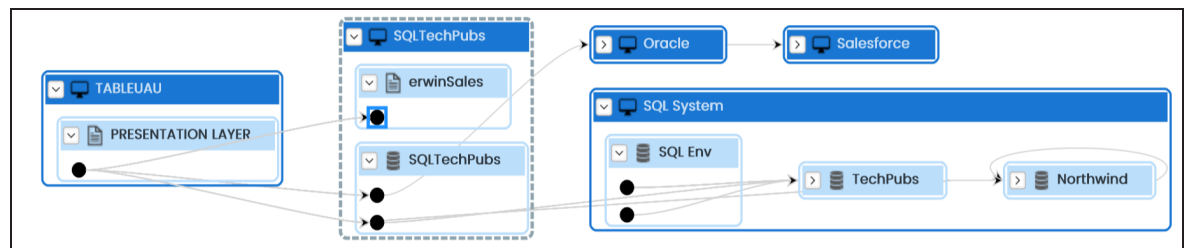

Switch View ()

level of objects displayed and see the system, environment or table in which the object is located.

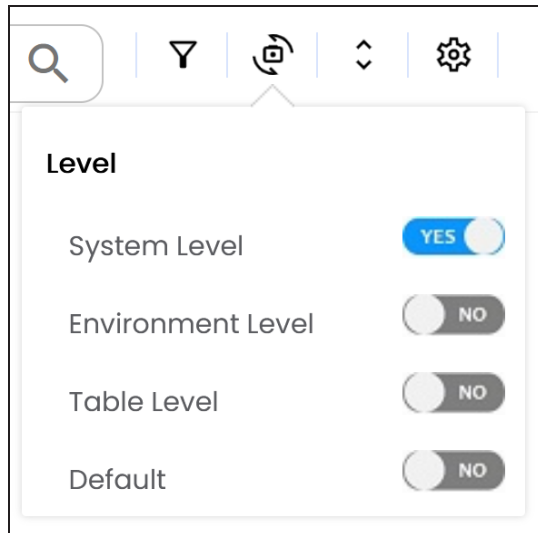

Options (⚙️)

Use this option to view lineage types, business properties and customizations options. For more information on lineage options, refer to the [Working on Lineage](#) section.

Lineage Options

Forward Lineage ☐ NO

Reverse Lineage ☐ NO

Dual Lineage ☒ YES

Business Properties

Sensitivity Indicator ☐ NO

Logical Name ☐ NO

Expanded Logical Name ☐ NO

DQ Score ☐ NO

Customization Options

Auto Layout ☒ YES

Overview Lineage ☒ YES


Overview Pane ☐ NO

Export (📄)

Use this option to export the lineage. Click  and use the following options:

- **Image (🖼️)**: Use this option to download the lineage as an image, in the .JPG format. Ensure that you expand the required nodes in a lineage before downloading the lineage as image.
- **PDF (📄)**: Use this option to download the lineage report in the .PDF format. Ensure that you expand the required nodes in a lineage before downloading the lineage report as PDF.
- **Excel (📊)**: Use this option to download the lineage report in the .XLSX format. Ensure that you expand the required nodes in a lineage before downloading the report.

On the lineage, expand a table node, and select a column to view its lineage path. The column is highlighted in blue color, its forward lineage path appears in red, and its reverse lineage path appears in blue. Assets that are not part of a lineage path disappear.

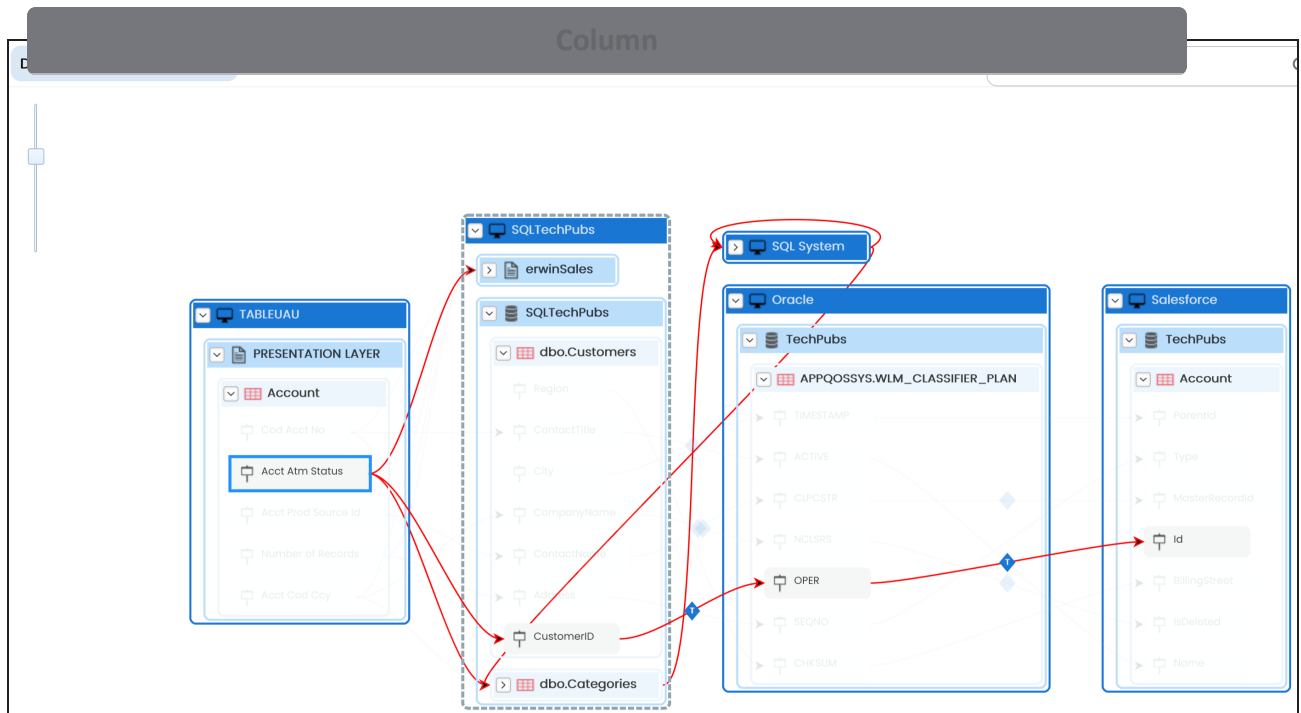

Right-click a path around the selected object to highlight its path of the source or target in the lineage.

Viewing Transformations

Transformations between columns are indicated using  in the lineage. Hover over  to view transformation rules for the columns on a pop-up. Or, click the path between the columns to highlight it to view detailed transformations between them in the Transformation Details pane.

The screenshot shows the 'Dual Lineage: SQLTechPubs' pane. The left pane displays the 'Map ID' and 'Map Name' details. The right pane displays the 'Transformation Details' pane with a table of properties and values.

Property	Value
Project Name	Project Tech Pubs
Map Name	erwinSalesIntegration
Map Spec Ver	1.01
JOB_XREF	
Source Extra	
Source Colu	customerid

Column

includes Business Rule, Extended Business Rule, Trans lookup Condition, Lookup On, and more relevant properties.


Working on Lineage

Lineage of a column shows how metadata moves through columns. It provides a summary of columns used as source and target. Also, it gives information about technical and business properties of columns involved in the lineage.

Use the following options to work on lineage:


Forward Lineage

Use this option to view forward lineage of the column.

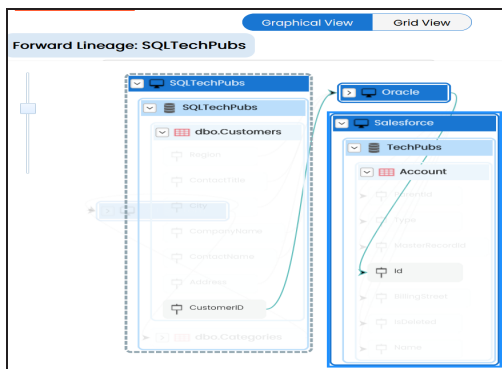


Reverse Lineage

Use this option to view reverse lineage of the column.

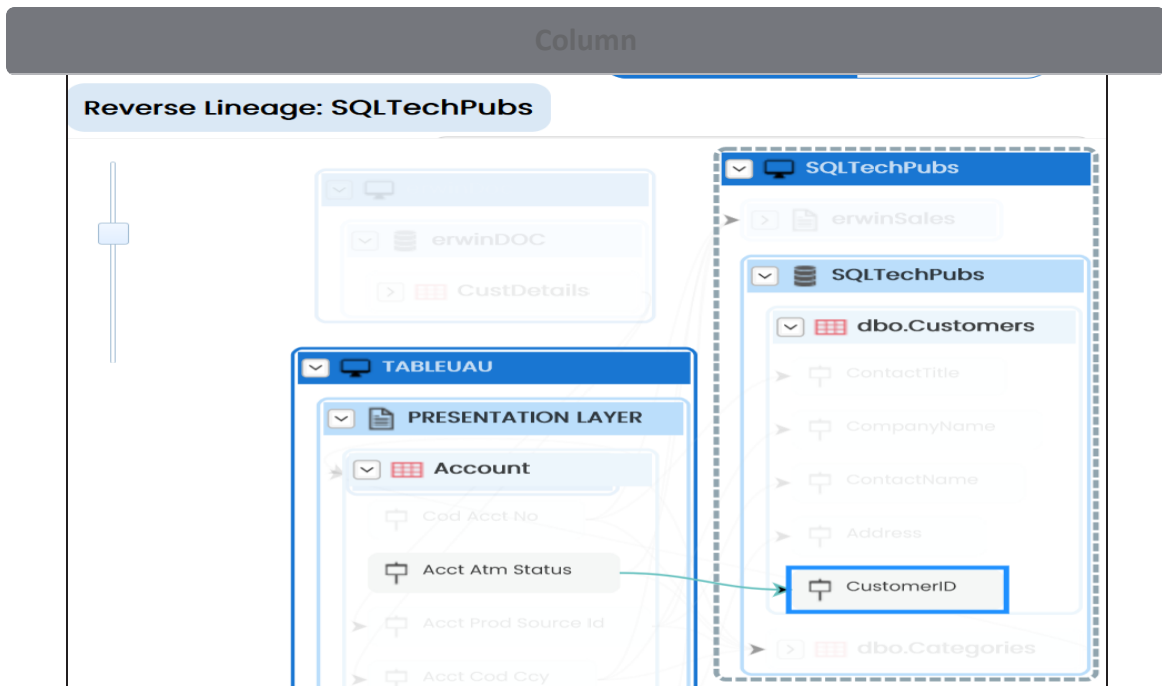

Dual Lineage


Use this option to view dual lineage, which includes both forward and reverse lineage of the column.

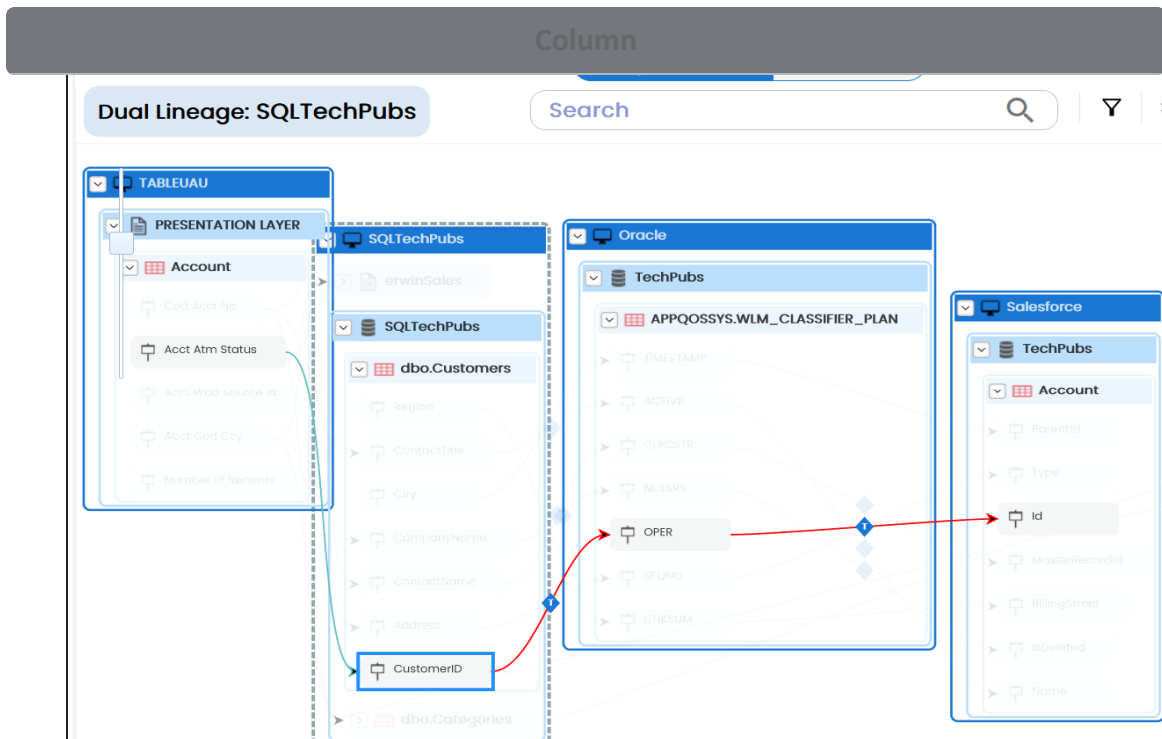

Sensitivity Indicator

Use this option to view sensitivity of the columns in the lineage. You can expand the environment node to view sensitive columns. The sensitive assets are indicated using




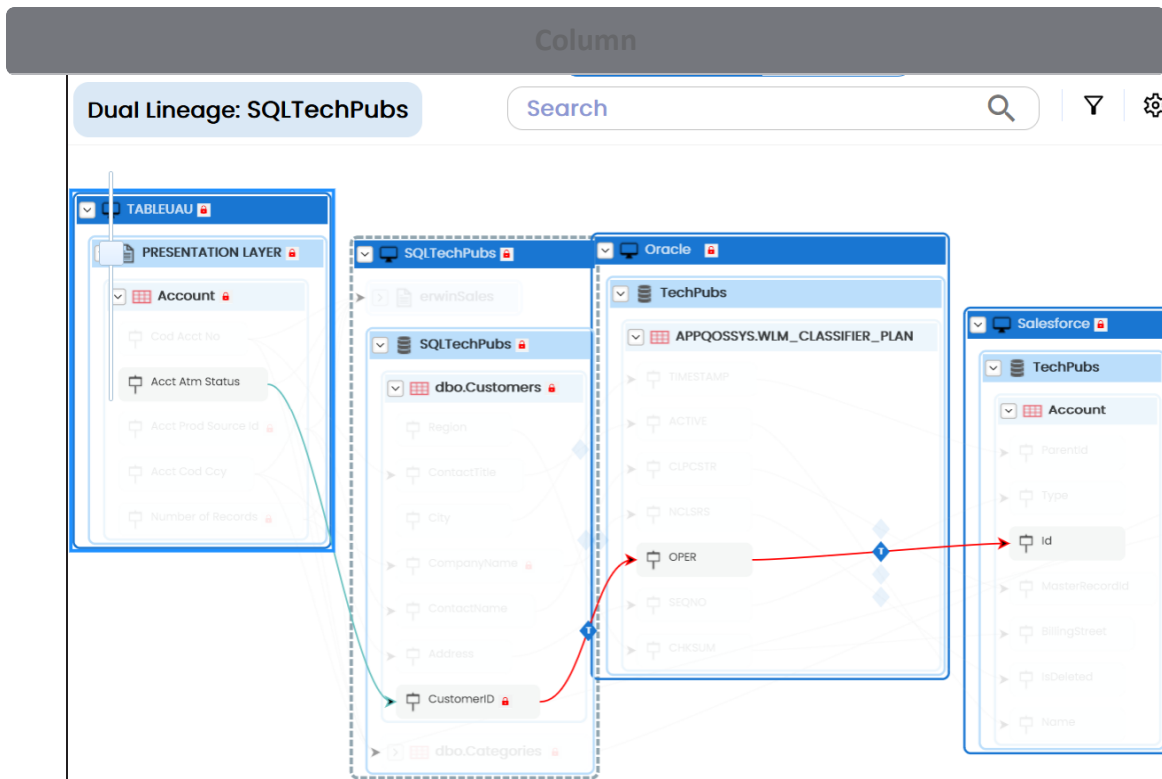

Logical Name

Use this option to view expanded logical names of the tables and columns in an environment in the lineage. You can expand a system node to view environments and tables.


For example, the following image displays the table's logical name in the lineage.

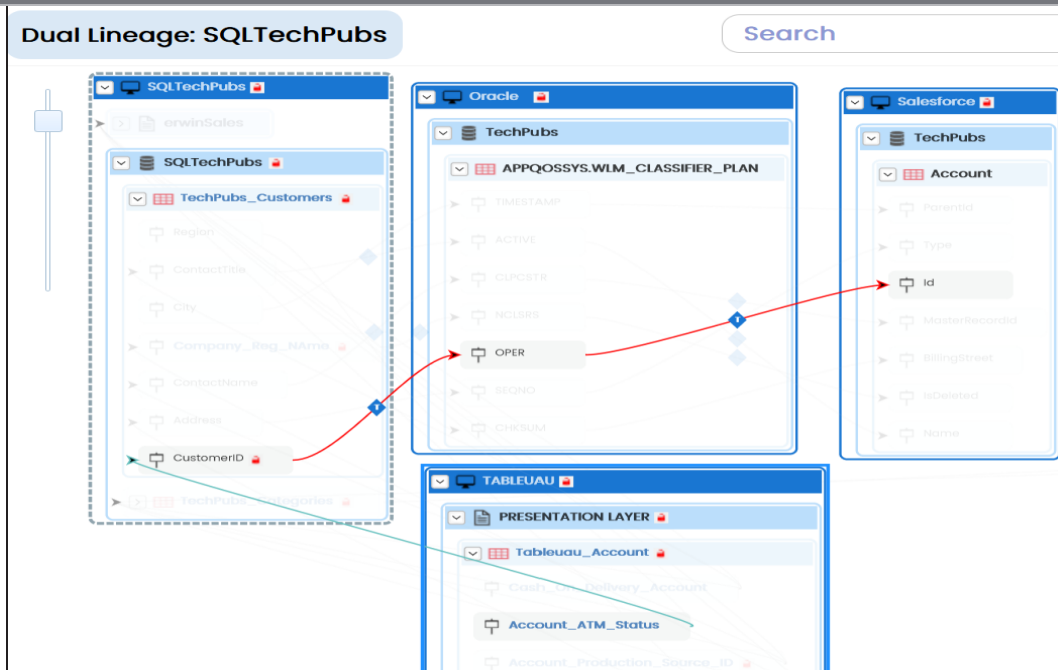

Expanded Logical Name

Use this option to view expanded logical names of the tables and columns in an environment in the lineage. You can expand a system node to view environments, tables, and columns. For more information on configuring extended properties of columns, refer to the [Configure Extended Properties](#) topic.


For example, the following image displays the table's expanded logical name in the lineage.

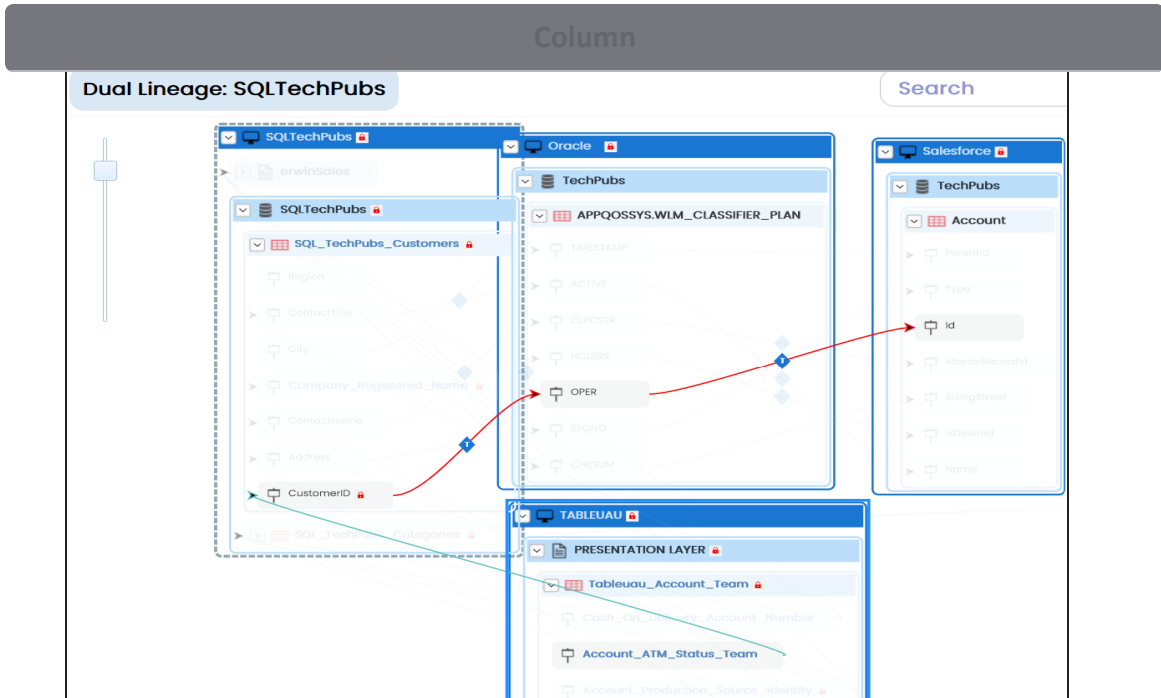

DQ Tool Score

Use this option to view the data quality score of the environments, tables, and columns in the lineage. You can expand a system node to view data quality scores for environments, tables, and columns.


For example, the following image displays the data quality score in the lineage.

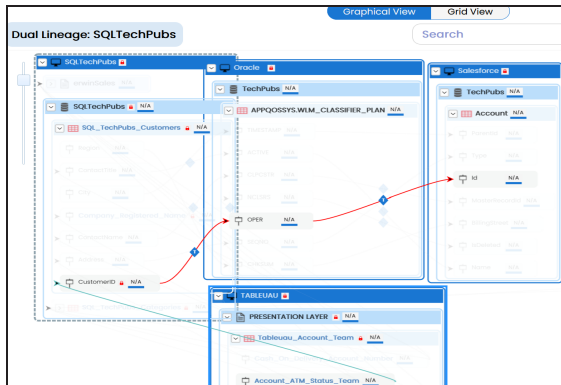

Auto Layout

Use this option to rearrange the layout of the lineage automatically.


For example, the following image displays the rearranged object layout with respect

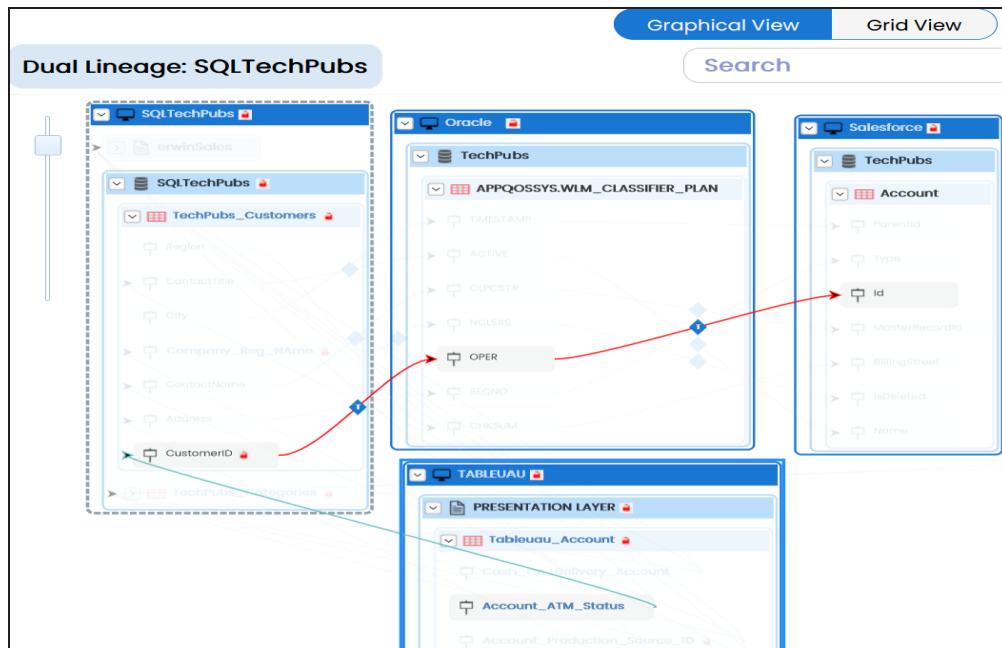

Overview Lineage

Use this option to view the lineage excluding systems and environments that do not exist in the Metadata Manager. When this option is switched off, the views include systems and environments, that do not exist in the Metadata Manager.

For example, the following image displays lineage excluding assets that do not exist in Metadata Manager.

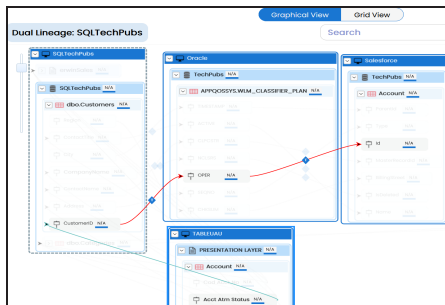

Overview Pane

Use this option to remove the lineage overview pane from the graphical view.


Running End to End Lineage

You can run end to end lineage analysis at project level and trace the data between any two mapping projects. The end to end lineage report can be drilled down further to trace intermediate stages of data.


To run end to end lineage at project level, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click the required source project.

The available options appear.

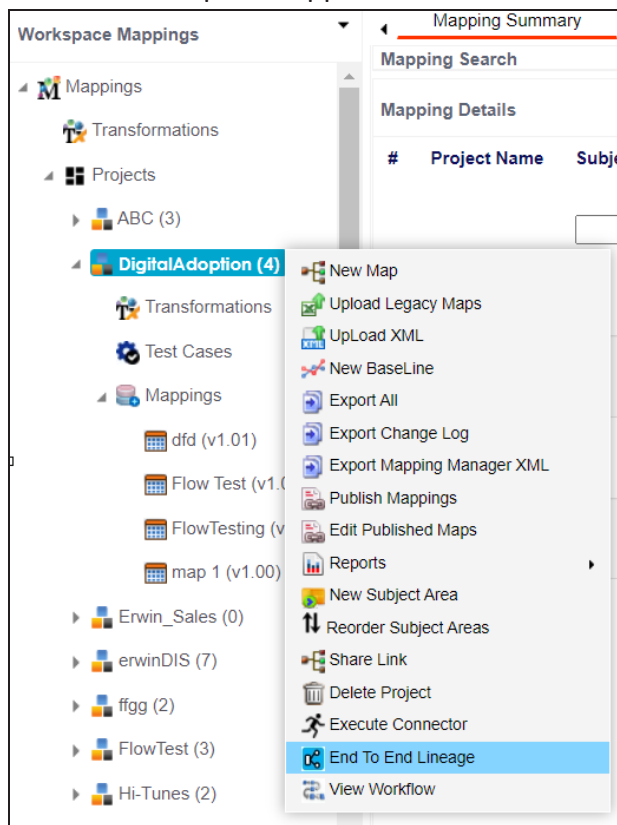

3. Click **End to End Lineage**.

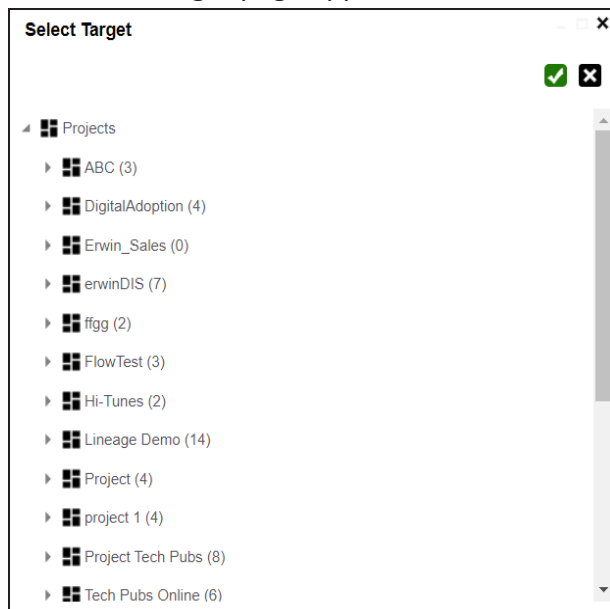

4. Select a target subject or a target project.
5. Click .

itions on the page for better visibility.

End To End Lineage Summary													
#	Source Project	Source Subject	Source System	Source Environment	Source Table	Source XPath	Source Column	Source User Defined-1	Source User Defined-2	Source Valid Values	Target Column	Target XPath	Target User Defined-1
1	Project		TABLEUAU	PRESENTATION LAYER	Account		Acct Atm Status			Click Here			
2	Project		TABLEUAU	PRESENTATION LAYER	Account		Cod Acct No			Click Here			
3	Project		TABLEUAU	PRESENTATION LAYER	Account		Cod Acct No			Click Here			
4	Project		TABLEUAU	PRESENTATION LAYER	Account		Acct Prod Source Id			Click Here			
5	Project		TABLEUAU	PRESENTATION LAYER	Account		Acct Prod Source Id			Click Here			
6	Project		TABLEUAU	PRESENTATION LAYER	Account		Acct Cod Ccy			Click Here			
7	Project		Oracle	TechPubs	APPQOSSYS.WLM_CL		SEQNO			Click Here			
8	Project		Oracle	TechPubs	APPQOSSYS.WLM_CL		TIMESTAMP			Click Here			
9	Project		TABLEUAU	PRESENTATION LAYER	Account		Acct Cod Ccy			Click Here			
10	Project		Oracle	TechPubs	APPQOSSYS.WLM_CL		CHKSUM			Click Here			

Use the following options to work on the End to End Lineage Summary page:

Navigate

Use or to navigate.

Expand ()

To expand the lineage summary, use . The expanded summary shows the intermediate stages of data.

End To End Lineage Details [Source: Acct Atm Status Target:]													
#	Project Name	Map Id	Map Name	Source System	Source Environment	Source Table	Source Column	Source Valid Values	Business Rule	Extended Business Rule	Target Valid Values	Target XPath	Target Column
1	Project	69	Data Integratic	TABLEUAU	PRESENTATI	Account	Acct Atm Status	Click Here			Click Here		CustomerID
2	Project Tech P	105	erwinSalesInte	SQLTechPub	SQLTechPubs	dbo.Customers	CustomerID	Click Here	TRUNC		Click Here		OPER
3	erwinDIS	66	SalesforceInte	Oracle	TechPubs	APPQOSSYS.WLM_CL	OPER	Click Here	UPPER		Click Here		Id

Running End to End Lineage

Use this option to reset the column order on the page.

Export ()

Use this option to export the lineage summary in the XLSX format.


Opening Business View

You can open a concise view of mappings with an ability to instantly generate lineage and impact analysis. It is an alternate view for both workspace and published maps and more suitable for business users.

To open business view of mappings, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a map.

The available options appear.

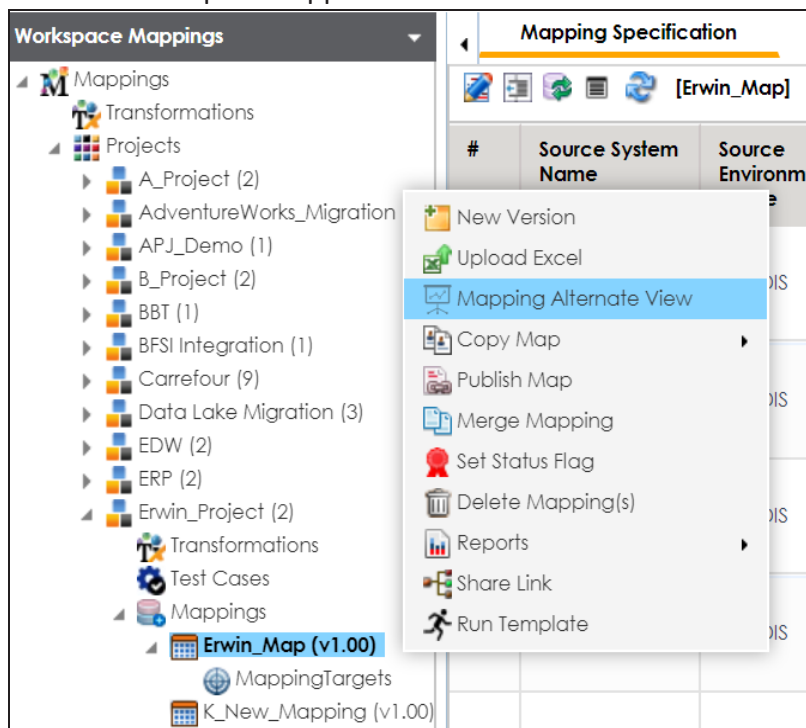

3. Click **Mapping Alternate View**.

The Mapping Summary page appears. It has two sections, Mapping Details and Mapping Specifications.

Opening Business View

Mapping Details									
Specification Name	Erwin_Map	Map Id	221						
Version	1.00	Version Label							
Mapping Description	mapping description								
Target Tables	dbo.ADS_New_ASSOCIATIONS	Source Tables	dbo.ADS_ASSOCIATIONS						
SQL Query		SQL Query Description							
Target Update Strategy		Map Spec Docs	View						
Graphical View	View	Extended Properties	View						
User Defined1		User Defined2							
User Defined3		User Defined4							
User Defined5		View all User Defined Details							
Mapping Specification									
Target Details						Transformations			
#	Info	System	Environment	Table	Column	Data Type (L/P/S)	Business Rule	Extended Business Rule	System
1		New_Erwin	Erwin_Environment	dbo.ADS_New_ASSOCIATIONS	ID_New	bigint(8,19,0)	ABS		erwinDIS
2		New_Erwin	Erwin_Environment	dbo.ADS_New_ASSOCIATIONS	SOURCE_OBJECT_ID_New	bigint(8,19,0)	ABS		erwinDIS
3		New_Erwin	Erwin_Environment	dbo.ADS_New_ASSOCIATIONS	SOURCE_OBJECT_TYPE_ID	bigint(8,19,0)	ABS		erwinDIS
4		New_Erwin	Erwin_Environment	dbo.ADS_New_ASSOCIATIONS	TARGET_OBJECT_ID_New	bigint(8,19,0)	ABS		erwinDIS
5		New_Erwin	Erwin_Environment	dbo.ADS_New_ASSOCIATIONS	TARGET_OBJECT_TYPE_ID	bigint(8,19,0)	ABS		erwinDIS
Page 1100 rows per page									

Mapping Details

It displays mapping details that includes mapping specification name, version, target update strategy, and lists of target and source tables.

Mapping Specification

It displays the Mapping Specification grid with source and target details.


Under the Mapping Details and Mapping Specification sections, you can click a <Table_Name> or <Column_Name> to view their respective details.

Table Details

To view table details, on the **Mapping Summary** page, click <Table_Name>.

The Table Details page appears. By default, the Impact Analysis tab opens. You can view direct, indirect, and other impacts of the table.

For more information on impact analysis, refer to the [Running Impact Analysis](#) topic.

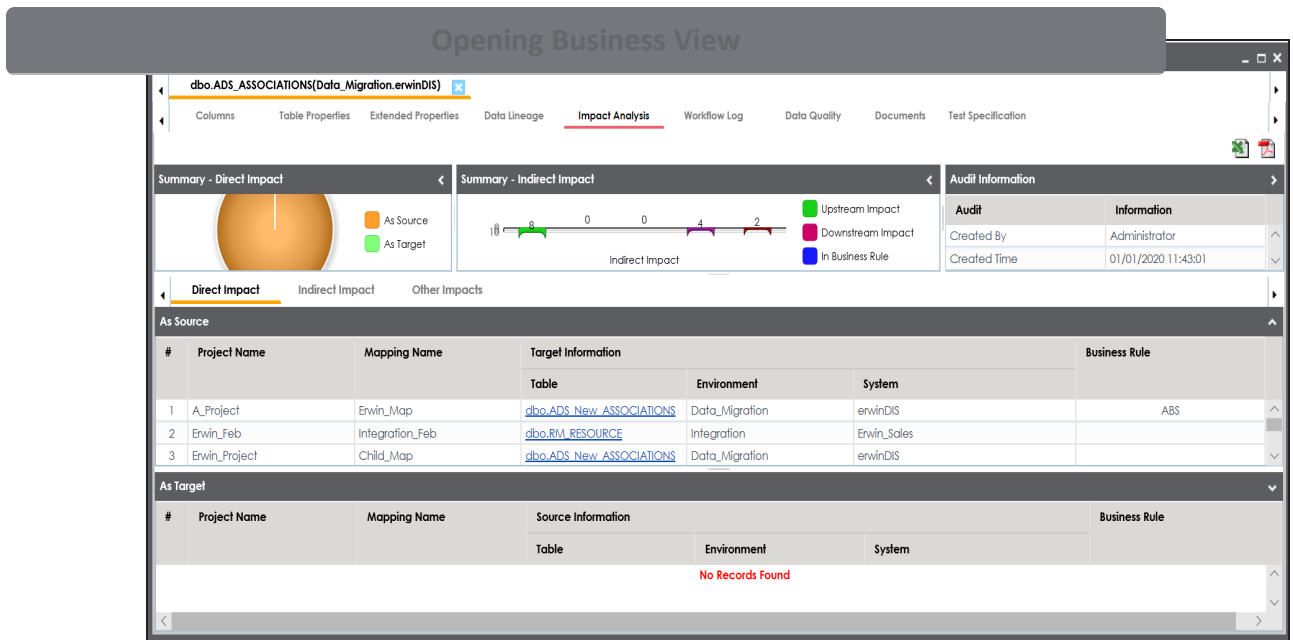

You can click the following tabs to work on the Table Details page:

- **Data Lineage:** This tab displays the forward and reverse lineage of the table. For more information on lineage of tables, refer to the [Table](#) topic.
- **Table Properties:** On this tab, you can view the table properties. For more information on table properties, refer to the [Updating Table Properties](#) topic.
- **Extended Properties:** This tab displays the extended properties configured for the table. For more information on configuring extended properties, refer to the [Configuring Extended Properties](#) topic.
- **Columns:** This tab displays a list of columns in the table.
- **Workflow Log:** This tab displays the workflow log of the table. For more information on configuring workflows, refer to the [Workflow Manager](#) topic.
- **Data Quality:** On this tab, you can preview and profile the data in the table. For more information on previewing and profiling data, refer to the [Previewing Data](#) topic.

Opening Business View

table.


Test Specifications: On this tab, you can view the test cases related to the table. For more information on test cases, refer to the [Creating Test Cases](#) topic.

Column Details

To view column details, on the Mapping Summary page, click <Column_Name>.

The Column Details page appears. By default, the Impact Analysis tab opens. You can view direct, indirect, and other impacts of the column.

For more information on impact analysis, refer to the [Running Impact Analysis](#) topic.

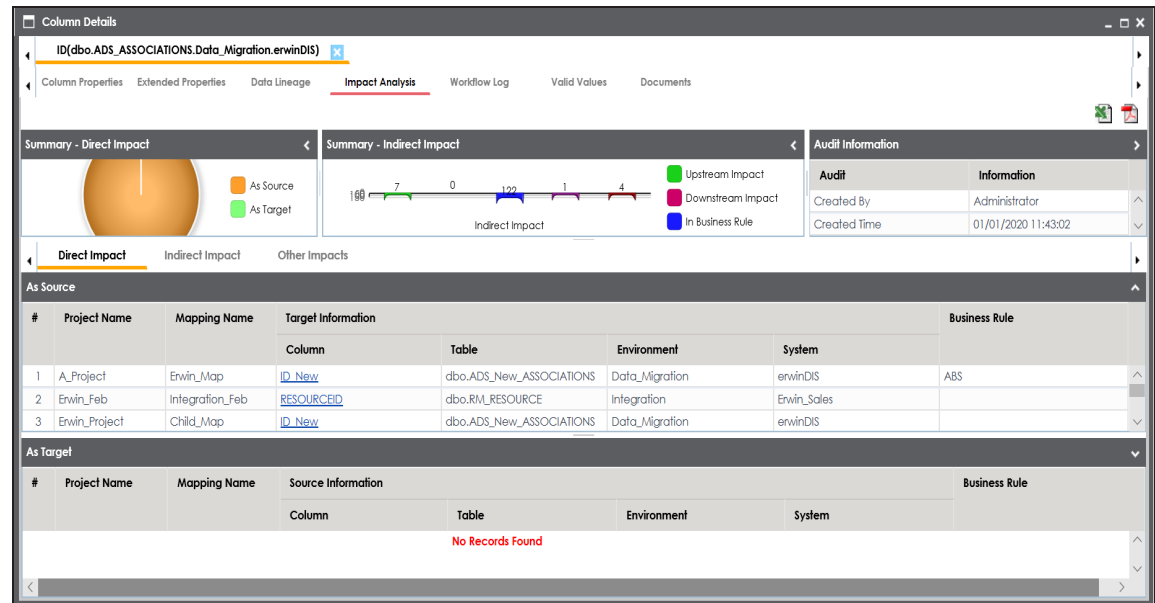

The screenshot shows the 'Column Details' window for the column 'ID(dbo.ADS_ASSOCIATIONS.Data_Migration.erwinDIS)'. The 'Impact Analysis' tab is selected. The 'Summary - Direct Impact' shows a pie chart with 'As Source' (orange) and 'As Target' (green). The 'Summary - Indirect Impact' shows a horizontal bar chart with 'Upstream Impact' (green), 'Downstream Impact' (pink), and 'In Business Rule' (blue). The 'Audit Information' table shows 'Created By: Administrator' and 'Created Time: 01/01/2020 11:43:02'.

The 'As Source' table lists the following data:

#	Project Name	Mapping Name	Target Information	Business Rule			
			Column	Table	Environment	System	
1	A_Project	Erwin_Map	ID_New	dbo.ADS_New_ASSOCIATIONS	Data_Migration	erwinDIS	ABS
2	Erwin_Feb	Integration_Feb	RESOURCEID	dbo.RM_RESOURCE	Integration	Erwin_Sales	
3	Erwin_Project	Child_Map	ID_New	dbo.ADS_New_ASSOCIATIONS	Data_Migration	erwinDIS	

The 'As Target' table shows 'No Records Found'.

You can click the following tabs to work on the Column Details page.

Data Lineage: This tab displays the forward and reverse lineage of the column. For more information on lineage of columns, refer to the [Column](#) topic.

figured for the column. For more information on configuring extended properties, refer to the [Configuring Extended Properties](#) topic.

- **Column Properties:** This tab displays the column properties. For more information on column properties, refer to the [Updating Column Properties](#) topic.
- **Workflow Log:** This tab displays the workflow log of the column. For more information on configuring workflows, refer to the [Workflow Manager](#) topic.
- **Valid Values:** This tab displays the codesets assigned to the column as valid values. For more information on assigning codesets to columns, refer to the [Assigning Codesets to Columns](#) topic.
- **Documents:** This tab displays the uploaded documents related to the column.

Viewing Mapping Statistics

You can view mapping statistics and view the following information about mapping specifications:

- Total rows
- Number of target tables
- Targets not mapped
- Sources not mapped
- Business rules
- Lookups

To view mapping statistics, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click the required map.

The Mapping Specification grid appears.

#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	erwinDIS	erwinDIS	dbo.ADS_ASSOCI	ID	bigint	8	ABS
2	erwinDIS	erwinDIS	dbo.ADS_ASSOCI	SOURCE_OBJECT_	bigint	8	ABS
3	erwinDIS	erwinDIS	dbo.ADS_ASSOCI	SOURCE_OBJECT_	bigint	8	ABS

3. click .

The mapping statistics are shown with hyperlinks.

Viewing Mapping Statistics

Profiles: Default		    	
Source Column Name	Source Column Data Type	Total Rows:	6
ID	bigint	Target Tables:	1
		Source Tables:	1
		Targets Not Mapped:	0
		Sources Not Mapped:	0
SOURCE_OBJECT_	bigint	Business Rules:	1
		Possible Truncations:	0
		Look Ups:	0

You can click the required hyperlinks to get the detailed information.

Associating Mappings

This section walks you through the process of associating mappings with the following:

- Code Mappings or Code Crosswalks
- Reference Tables
- Requirements

It involves:

- [Associating code maps with data item mappings](#)
- [Associating reference tables with mappings](#)
- [Linking requirements with mappings](#)

Associating Code Maps with Data Item Mappings

A code map can be associated with a data item mapping to standardize data across the organization. These code maps are maintained in Codesets Manager. For more information on codesets and code mappings, refer to the [Codeset Manager](#) section.


Before associating a code map with data item mappings, ensure that you publish the code map.

Publishing Code Maps

To publish code maps, follow these steps:

1. Go to **Application Menu > Data Catalog > Codeset Manager > Codeset Mappings**.
2. In the **Code Mappings Workspace** pane, right-click a code map.


The available options appear.

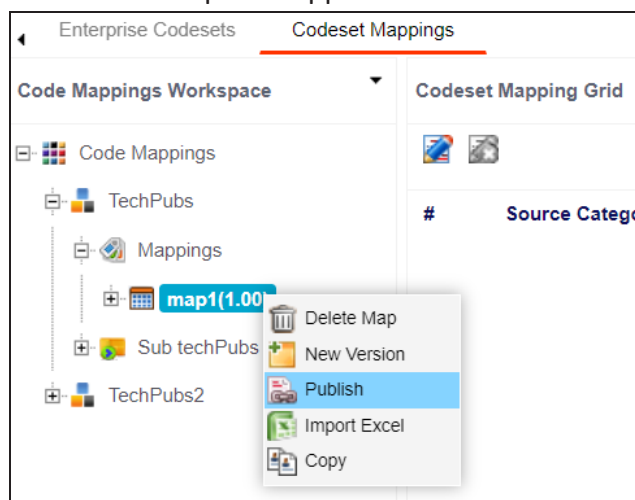

3. Click **Publish**.

The Publish Codeset Map page appears.

Associating Code Maps with Data Item Mappings

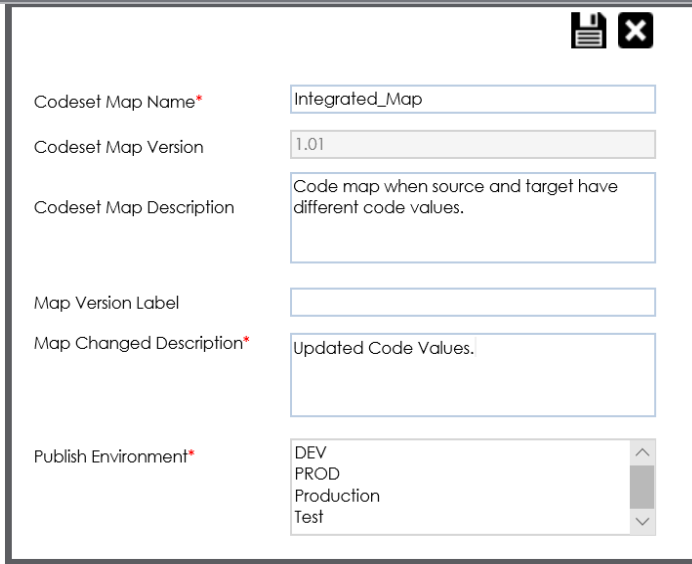

Codeset Map Name* Integrated_Map

Codeset Map Version 1.01

Codeset Map Description Code map when source and target have different code values.

Map Version Label

Map Changed Description* Updated Code Values.

Publish Environment* DEV
PROD
Production
Test

4. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Codeset Map Name	Specifies the name of the code map. For example, Gender Crosswalk.
Codeset Map Version	Specifies the new version of the code map. For example, 1.02.
Codeset Map Description	Specifies the description about the code map. For example: The codeset map is the code mappings between the two codesets, Misc Gender Codes and Gender.
Map Version Label	Specifies the version label of the code map. For example, Beta.
Map Changed Description	Specifies the description about the changes made in the code map. For example: Code values were updated.
Publish Environment	Specifies the environment where the code map is being published.


Associating Code Maps with Data Item Mappings

Field Name	Description
	For example, test. You can create publish environments in Enterprise Codesets. For more information on creating publish environments, refer to the Publishing Codesets topic.

5. Click .

The code map is published and it can be found in the Published Code Mappings pane under the selected Publish Environment.

A new version of the code map is created under the Mappings tree.

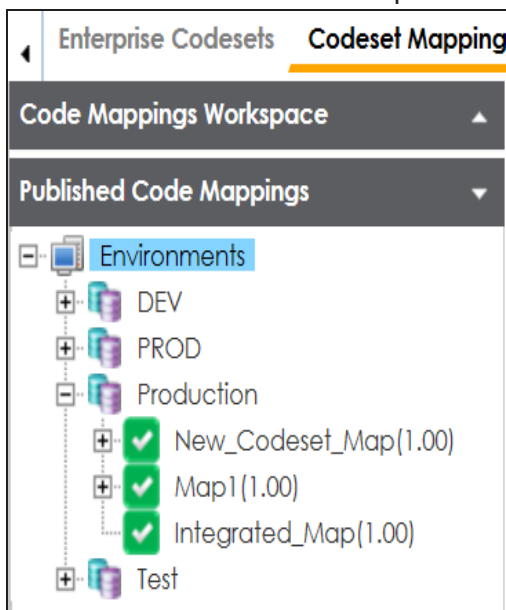

A published code map can be associated with a mapping in the Mapping Manager. The published code map is available under the Code Mappings Catalog.

Associating Code Maps

To associate published code maps with data item mappings, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click the required map.

Associating Code Maps with Data Item Mappings

Mapping Specification						
[Data Integration]						
#	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type	Target Column Length
1	SQLTechPubs	SQLTechPubs	dbo.Customers	CustomerID	nchar	5
2	SQLTechPubs	SQLTechPubs	dbo.Customers	CompanyName	nvarchar	40
3	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactName	nvarchar	30
4	SQLTechPubs	SQLTechPubs	dbo.Customers	ContactTitle	nvarchar	30
5	SQLTechPubs	SQLTechPubs	dbo.Customers	Address	nvarchar	60

3. Click .

4. In the **Mapping Specification** grid, right-click the header menu.

Mapping Specification						
[Data Integration]						
Target Table	Target Column Name	Target Column Data Type	Target Column Length	Target Column Precision	Target Column Scale	Target Column Nullable Flag
customers	PostalCode	nvarchar	10	0		
customers	City	nvarchar	15	0	0	☒

5. Select the **CSM Mapping** check box.

The CSM Mapping Column appears in the Mapping Specification grid.

6. In the right pane, expand **Code Mapping Catalog**.

7. Drag the code map into the **Mapping Specification** grid and drop it under the **CSM Mapping** column for the required row.

or click .

The code map is associated with the data item mappings.


Associating Reference Tables with Mappings

Reference data sets the permissible values for other data fields. To standardize your data, you can associate a reference table with mappings. Ensure that you publish the required reference table before associating it with mappings.

To associate reference tables with Mappings, follow these steps:


1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, click a map.

The Mapping Specification grid appears.

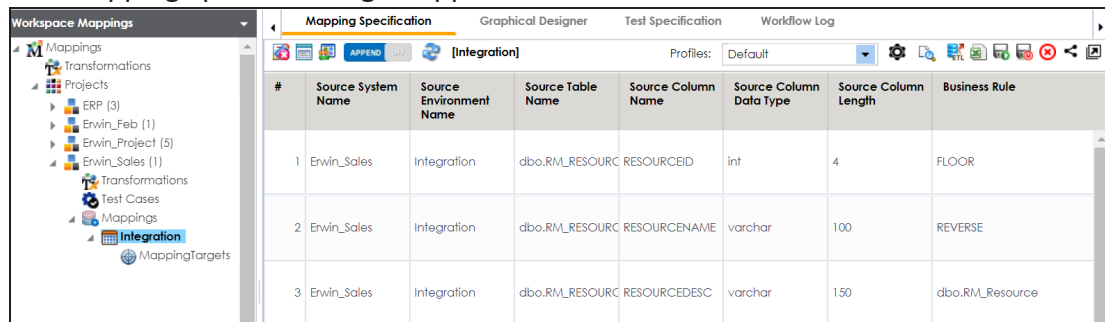

#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEID	int	4	FLOOR
2	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCENAME	varchar	100	REVERSE
3	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEDESC	varchar	150	dbo.RM_Resource

3. Click .
4. Right-click the header menu.

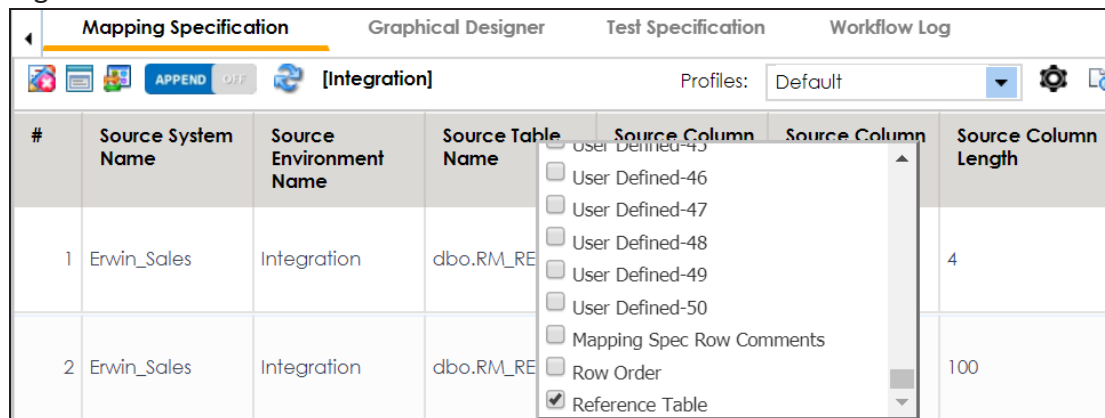

#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCEID	int	4	FLOOR
2	Erwin_Sales	Integration	dbo.RM_RESOURCE	RESOURCENAME	varchar	100	REVERSE

5. Select the **Reference Table** check box.

The Reference Table column appears in the Mapping Specification grid.

Associating Reference Tables with Mappings

row under the **Reference Table** column.



You can associate multiple source columns with the reference tables.

Mapping Specification						
[Erwin_Map]						
Profiles: Default						
target Column length	Created By	Created Date	CSM Mapping	Last Modified By	Last Modified Date Time	Reference Table
	Administrator	2019-10-21 14:36:15.057	Integrated_Map(1.00)	Administrator	2019-12-10 14:49:07.187	
	Administrator	2019-10-21 14:36:15.057		Administrator	2019-12-10 14:49:07.187	

Metadata Catalogue	
Code Mappings Catalogue	
Code Mappings	
C_Name	
EDW	
ICD Crosswalks	
Integrated_Data	
Mappings	
Integrated_Map(1.00)	
Map1(1.00)	
New_Category	

7. Click .

The reference table is associated with the mappings.

Linking Requirements to Mappings

To ensure enterprise-wide traceability, you can link your functional requirements to data mappings.

To link functional requirements to mappings, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. Click a mapping.

The mapping opens in the detailed view.

The screenshot shows the Mapping Manager interface. On the left is a tree view of the workspace mappings. The main area is titled 'Mapping Specification' and contains a table with the following data:

#	Source System Name	Source Environment Name	Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Rule
1	A_System	A_Environment	dbo.CAT_DIALOG	CAT_DIALOG_TAB	int	4	
2	A_System	A_Environment	dbo.CAT_DIALOG	CAT_DIALOG_PRC	int	4	
3	A_System	A_Environment	dbo.CAT_DIALOG	CAT_DIALOG_TAB	varchar	50	
4	A_System	A_Environment	dbo.CAT_DIALOG	CAT_DIALOG_TAB	varchar	4000	
5	A_System	A_Environment	dbo.CAT_DIALOG	CREATED_BY	varchar	50	
6	A_System	A_Environment	dbo.CAT_DIALOG	CREATED_DATE_Ti	datetime	8	

At the bottom of the table, it says 'Records from 1 to 9' and 'Page 1' with a '100 rows per page' dropdown.

3. On the **Mapping Specification** tab, right click the grid header.
A list of header columns appears.

Linking Requirements to Mappings

#	Source System Name	Source Environment Name	Source Table	Source Column	Source Column Data Type	Source Length
1	A_System	A_Environment			nt	4
2	A_System	A_Environment			nt	4
3	A_System	A_Environment	dbo.CAT_DIALOG	CAT_DIALOG_TAB	varchar	50

4. Scroll down the list and select the **Specification Artifact** check box.
The specification Artifact column becomes visible on the Mapping Specification tab.
5. In the right pane, click **Specification Artifact Catalog**.
6. Expand the project that contains the required specification.
7. Drag and drop the specification on the **Specification Artifacts** column in the required row.

#	Column Type	Target Column Length	Created By	Created Date	Specification Artifacts	Last Modified By	Last Modified Date Time
		4	Administrator	2019-10-16 15:44:32.383	Sp_Name (v1.00)	Administrator	2019-10-17 11:56:07.883
		4	Administrator	2019-10-16 15:44:32.383		Administrator	2019-10-16 15:45:28.353
	ar	50	Administrator	2019-10-16 15:44:32.383		Administrator	2019-10-16 15:45:28.353

8. Click .

Requirements are linked to the selected mapping.

Publishing and Creating Versions of Mappings

This section walks you through the process of publishing mappings to corresponding source or target production environments. Production environments of the source and the target are defined in the Metadata Manager. You can also create new versions of the mappings while archiving the older versions.

It involves:

- [Creating versions of maps](#)
- [Base-lining Projects](#)
- [Comparing two different mapping versions](#)
- [Publishing mappings](#)
- [Restoring archived maps as active](#)


Creating Versions of Maps

You can create new version of maps and track history of changes made in the mapping specification. You can also notify and send mail comments to all the project users about the creation of new version. For more information on notifying project users, refer to the [Configuring Notifications](#) topic.

To create versions of maps, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a map.

The available options appear.

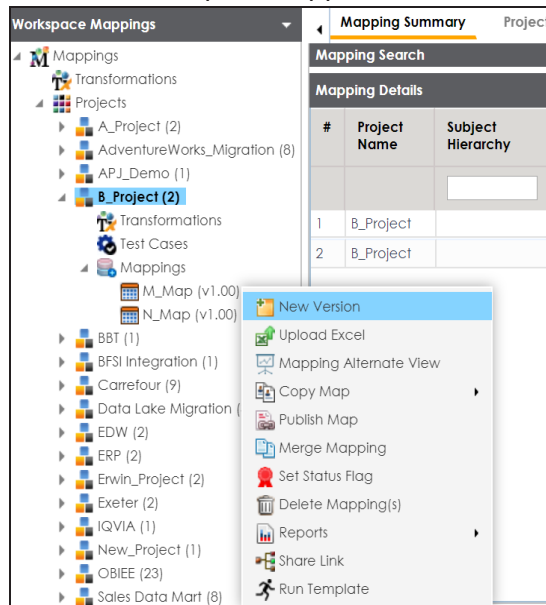

3. Click **New Version**.

The New Version page appears.

Creating Versions of Maps

Mapping Name*

Mapping Version

Mapping Description

Version Label

Changed Description*

Mail Comments

4. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Mapping Name	Specifies the mapping specification name. For example, EDW_PROD_IDS_Benefits_Detail.
Mapping Version	Specifies the new version of the mapping specification. For example, 1.02.
Mapping Description	Specifies the description about the mapping. For example: This is a map between EDW source and IDS target systems.
Version Label	Specifies the version label of the mapping specification. For example, Beta. For more information on configuring version display of mapping specifications, refer to the Configuring Version Display topic.
Changed Description	Specifies the description of the changes made in the mapping specification. For example: A business rule for a source column was added.

Creating Versions of Maps


Field Name	Description
Mail Comments	Specifies the mail comments, which can be sent to the project users through an email notification. For example: Target update strategy is not updated. For more information on configuring notifications, refer to the Configuring Notifications topic.

5. Click .

A new version of the map is created and the previously active version moves under the archive folder.



Archived maps are in read-only mode and cannot be edited.

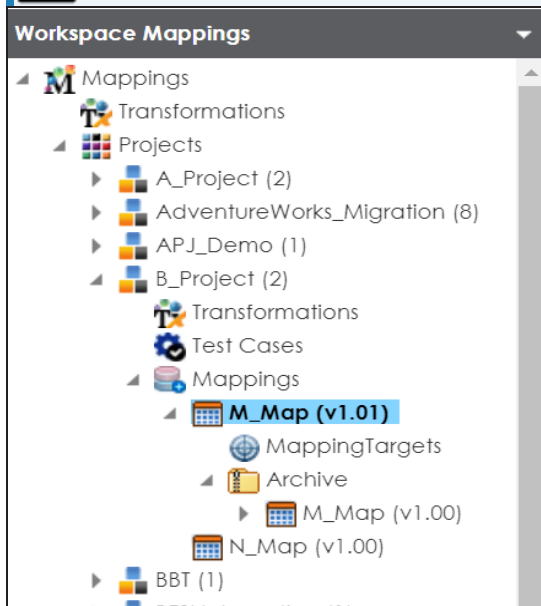


Base-lining Projects

Base-lining a project brings all maps in the project to the same version. You can base-line all the maps in a project and record change description and notify all the project users and send mail comments to them.

To base-line projects, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a project.

The available options appear.

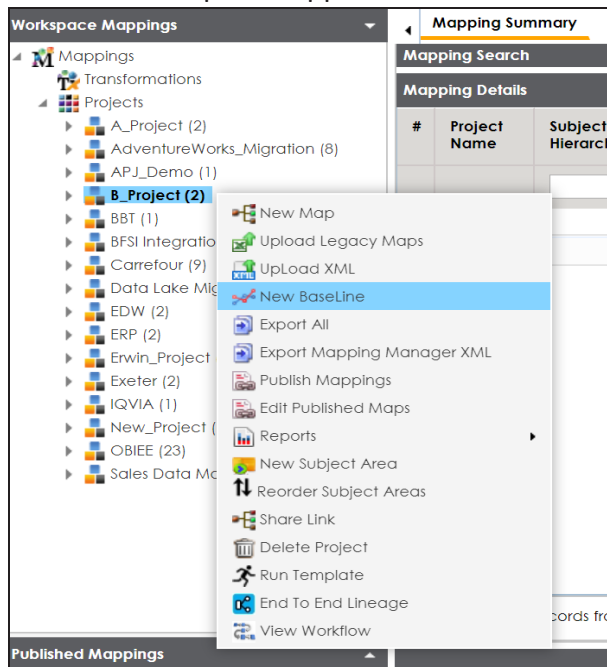

3. Click **New Baseline**.

The New Baseline page appears.

Base-lining Projects

Version Label

Change Description*

AHBU[bulleted list][numbered list][decreasing indent][increasing indent]eraser

Mall Comments

- #### 4. Enter **Version Label**, **Change Description**, and **Mail Comments**.

For example:

- **Version Label** - Beta.
For more information on version display, refer to the [Configuring Version Display](#) topic.
- **Change Description** - Business rule for all the source column was changed to ASCII.
- **Mail Comments** - The target update strategy needs to be updated.
For more information on notifying project users, refer to the [Configuring Notifications](#) topic.

5. Click .

The project is base-lined and all the maps in the project now have the same version. Project users receive email notifications about the base-lining and mail comments, if you enable notifications for it. For more information on configuring notifications, refer to the [Configuring Notifications](#) topic.

Comparing Two Different Mapping Versions

You can use the advanced mapping comparison ability to quickly and efficiently compare any two mapping versions. You can view the changes on a row by row basis and improve your debugging ability.

To compare two different mapping versions, follow these steps:


1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, select two mapping versions.



Use shift keys to select the two mapping versions.

3. Right-click the selection.

The available options appear.

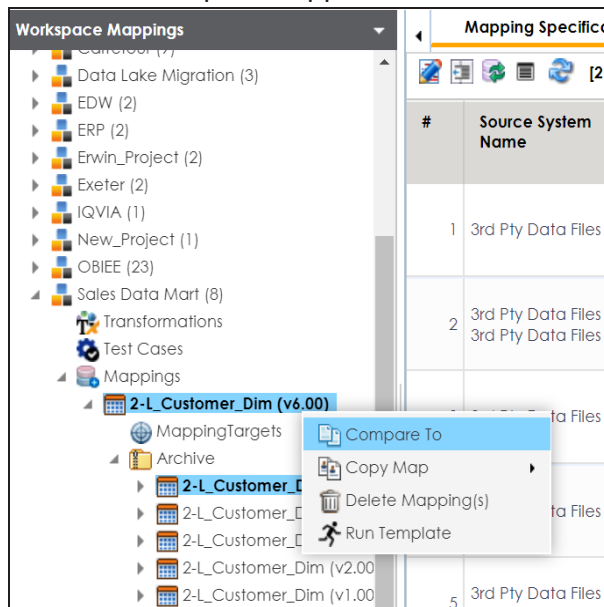

4. Click **Compare To**.

The Compare To page appears. All the changes are highlighted in red color in the comparison report.

Comparing Two Different Mapping Versions

Development Team

Map1 Name: 2-L_Customer_Dim (V6.00 / VL+5x)

Map2 Name: 2-L_Customer_Dim (V5.00 / VL+4x)

Exclude Common Rows Export:   

Version	System	Environment	Table	Column	Data Type	Length	Precision	Scale	Definition	Comments	Logical Column Name	Table
6.00	Jed Pty Data Files	Jed Pty Data Files	Customers	CustNumber	Varchar(10)	10.0			Customer Number			Customers
5.00	Jed Pty Data Files	Jed Pty Data Files	Customers	CustNumber	Varchar(10)	10.0			Customer Number			Customers

Version	System	Environment	Table	Column	Data Type	Length	Precision	Scale	Definition	Comments	Logical Column Name	Table
6.00	Jed Pty Data Files	Jed Pty Data Files	Customers	CustNumber	Varchar(10)	10.0			Customer Number			Customers
5.00	Jed Pty Data Files	Jed Pty Data Files	Customers	CustNumber	Varchar(10)	10.0			Customer Number			Customers

Version	System	Environment	Table	Column	Data Type	Length	Precision	Scale	Definition	Comments	Logical Column Name	Table
6.00	Jed Pty Data Files	Jed Pty Data Files	Customers	First Name	Varchar(25)	25.0			First Name			Customers
5.00	Jed Pty Data Files	Jed Pty Data Files	Customers	First Name	Varchar(25)	25.0			First Name			Customers

Version	System	Environment	Table	Column	Data Type	Length	Precision	Scale	Definition	Comments	Logical Column Name	Table
6.00	Jed Pty Data Files	Jed Pty Data Files	Customers	First Name	Varchar(25)	25.0			First Name			Customers
5.00	Jed Pty Data Files	Jed Pty Data Files	Customers	First Name	Varchar(25)	25.0			First Name			Customers

Version	System	Environment	Table	Column	Data Type	Length	Precision	Scale	Definition	Comments	Logical Column Name	Table
6.00	Jed Pty Data Files	Jed Pty Data Files	Customers	Full Address	Varchar(50)	50.0			Customer full address			Customers
5.00	Jed Pty Data Files	Jed Pty Data Files	Customers	Full Address	Varchar(50)	50.0			Customer full address			Customers

To exclude exporting common rows in the report, select **Exclude Common Rows Export**.

Use the following options to export the comparison report:

- To export the report in the PDF format, click .
- To export the report in the XLSX format, click .
- To export the report in the HTML format, click .


Publishing Mappings

You can publish a map on an effective date and enter publishing notes for a record. Before publishing mappings, ensure that the source and the target environments have their corresponding production environments.

Publishing Mappings

To publish mappings, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click a map.

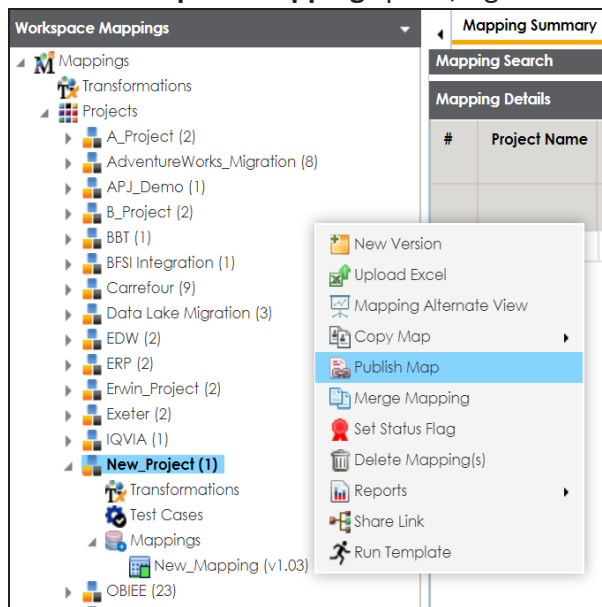

3. Click **Publish Map**.

The Publish Map page appears.

Publishing Mappings

* Publishing the map will create a new version.

Mapping Name: New_Mapping

Mapping Version: 1.03

Version Label:

Effective Date*

Change Description*

Publish Notes*

4. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Mapping Name	Specifies the mapping specification name. For example, EDW_PROD_IDS_Benefits_Detail. It is autopopulated and you cannot edit this field.
Mapping Version	Specifies the version of the mapping specification. For example, 1.00. It is autopopulated. For more information on configuring version display of maps, refer to the Configuring Version Display topic.
Version Label	Specifies the version label of the mapping specification. For example, EDW_PROD_IDS_Benefits_Detail (Alpha). For more information on configuring version display of maps, refer to the Configuring Version Display topic.

Publishing Mappings	
Field Name	Description
Effective Date	Use  to enter the effective date of publishing. For example, 04/02/2020.
Change Description	Specifies the description for changes made in the mapping specification. For example: Business rule was modified from ABORT to ASCII for the source column ID.
Publish Notes	Specifies the publish notes about the mapping specification. For example: The mapping specification is approved for publishing on 1 Feb 2020.

5. Click .

The mapping is published on the effective date and saved in the **Published Mappings** pane. The source and the target environments in the published mapping are updated to their corresponding production environments. All previously published versions of the same mapping are stored in the History folder. A published mapping cannot be edited.

A new version of the mapping is automatically created in **Workspace Mappings** that can be edited.

To view published map details, in the **Published Mappings** pane, click the <Mapping_Name>.


The business view of the mapping appears which can be used to run impact analysis, lineage analysis, and data quality etc. For more information on business view, refer to the [Opening Business View](#) topic.

Updating Publishing Details

To update publishing details of published maps, follow these steps:


1. In the **Workspace Mappings** pane, right-click the required project.

The available options appear.

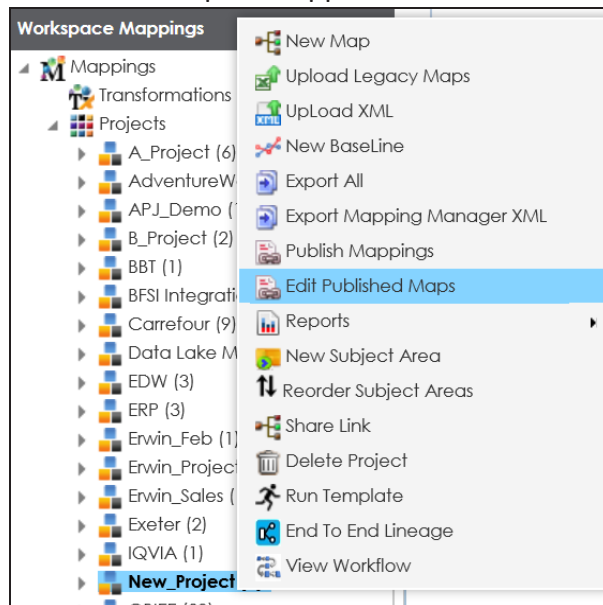

Publishing Mappings

The Edit Publish Mappings page appears. You can use **Filter by Effective Date** to filter the mappings based on the effective publishing date.

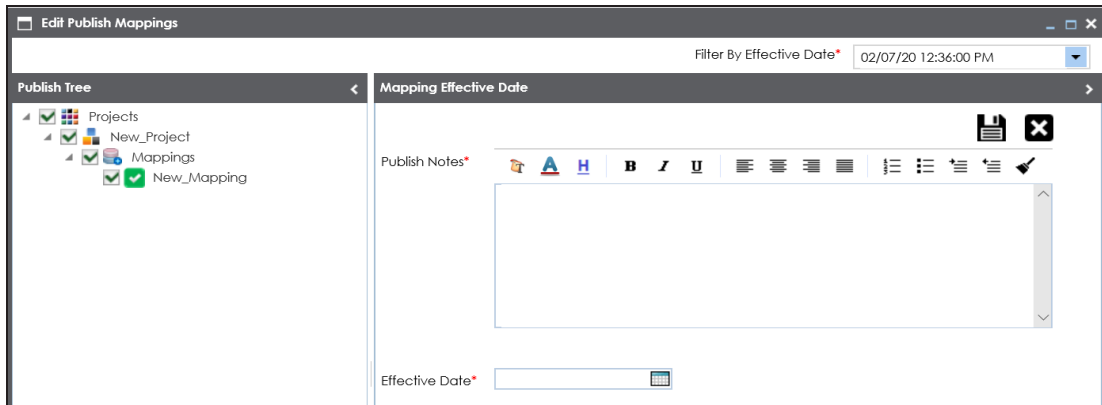

3. In the **Publish Tree** pane, select the required published map.

Now, you can update Publish Notes and Effective Date.

4. Click .


The publishing details of the map is updated.

Restoring Archived Maps As Active

When you create a new version of a map, the older version is archived. The archived map is in read-only mode and cannot be edited. You can restore an archived map as an active map and work on the map.

To restore archived maps as active, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the **Workspace Mappings** pane, right-click the required archived map.

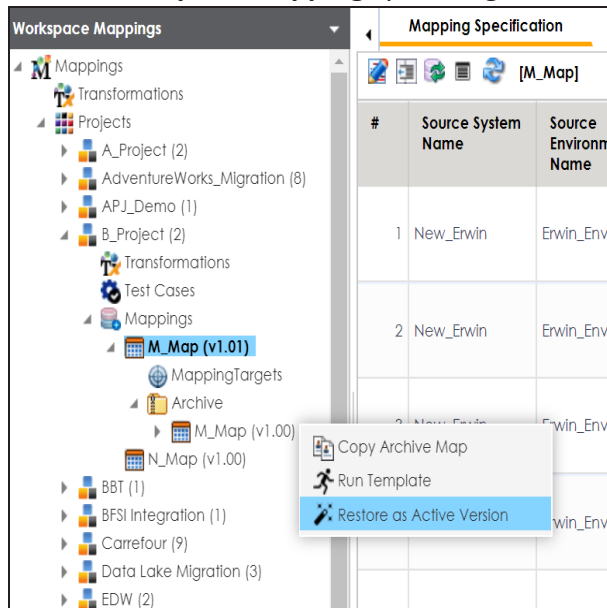

The Restoring Archived Mapping as Active page appears.

Restoring Archived Maps As Active

Mapping Name*	M_Map
Mapping Version	1.02
Mapping Description	
Version Label	
Changed Description*	
Mall Comments	

3. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.


Field Name	Description
Mapping Name	Specifies the mapping specification name. For example, EDW_PROD_IDS_Benefits_Detail.
Mapping Version	Specifies the new version of the mapping specification. For example, 1.02.
Mapping Description	Specifies the description of the mapping. For example: This is a map between EDW source and IDS target systems.
Version Label	Specifies the version label of the mapping specification. For example, Beta. For more information on configuring version display of mapping specifications, refer to the Configuring Version Display topic.
Changed	Specifies the description of the changes made in the mapping spe-

Restoring Archived Maps As Active

Field Name	Description
Description	cification. For example: A business rule for a source column was added.
Mail Comments	Specifies the mail comments which can be sent to the project users through an email notification. For example: Target update strategy is not updated. For more information on configuring notifications, refer to the Configuring Notifications topic.

4. Click .

The archived map is restored as a new version and the existing active map is archived.

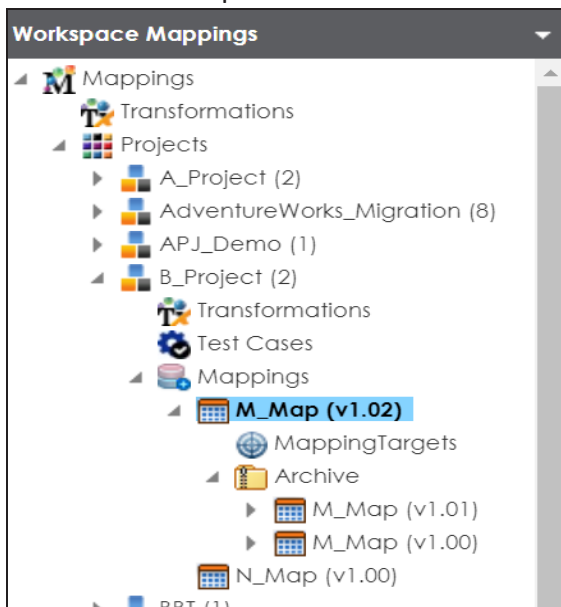

Exporting Mapping Specifications

This section walks you through the process of exporting mapping specifications. Once the mappings are approved for coding requirements like ETL Jobs, SQL Scripts, Python Code, Spark Code, DDL Scripts, or Stored Procedures then you can export them for further use.

You can export mapping specifications to the following formats:


- [Proprietary XML](#)
- [TXT](#)

Proprietary XML Format


Once the mappings are approved for coding, you can export the mappings as coding requirements in the XML format.

To export mapping specifications into proprietary XML format, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the Workspace Mappings pane, right-click a project.

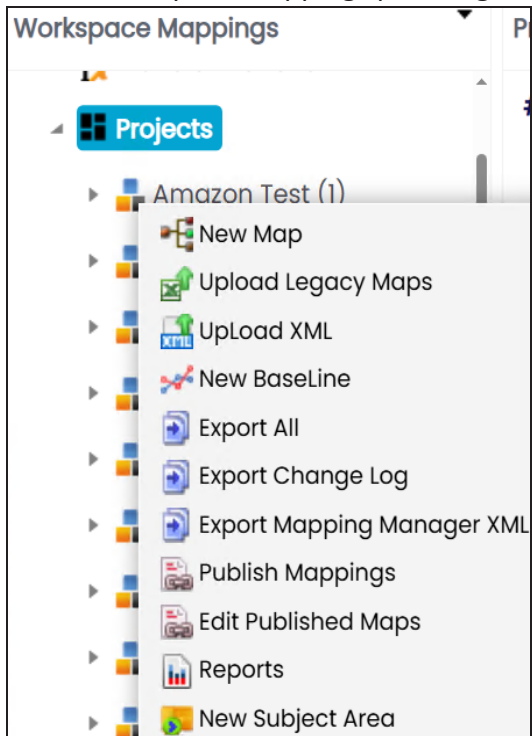

The Export Mapping Manager XML page appears.

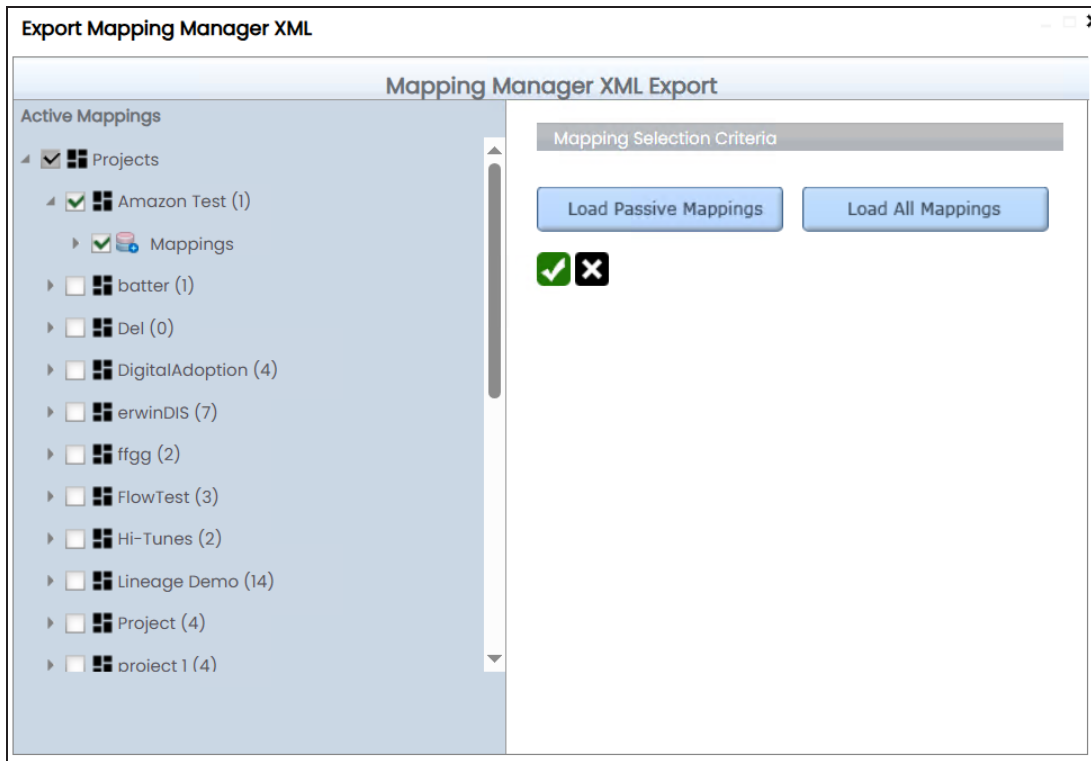


4. Select required projects or mappings and click .

Selected projects and maps are exported and downloaded as a ZIP file. Unzip this file to use mapping specifications in the XML format.


TXT Format

Once the mappings are considered 'approved for coding', you can export the mappings as coding requirements to automatically generate ETL/ELT jobs for tools, such as Informatica PowerCenter, IBM DataStage, Big Data, and Talend.

1. Go to **Application Menu > Data Catalog > Mapping Manager**.
2. In the Workspace Mappings pane, right-click a project.

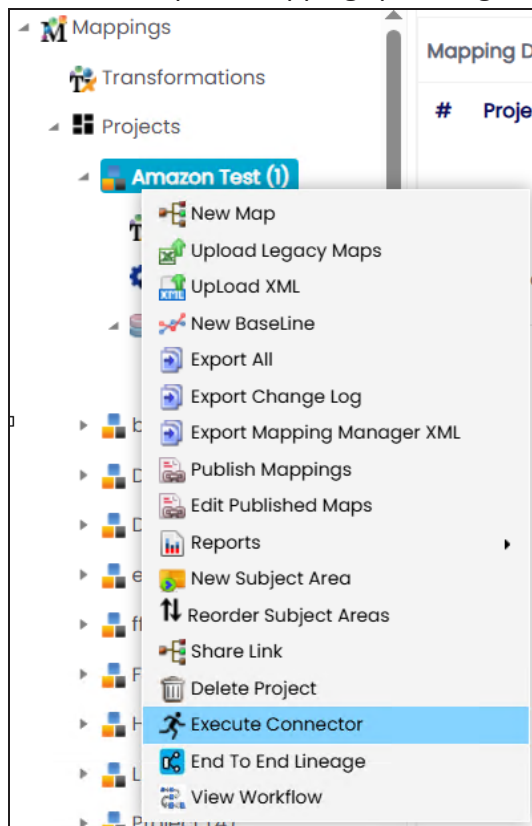


The Connectors page appears.

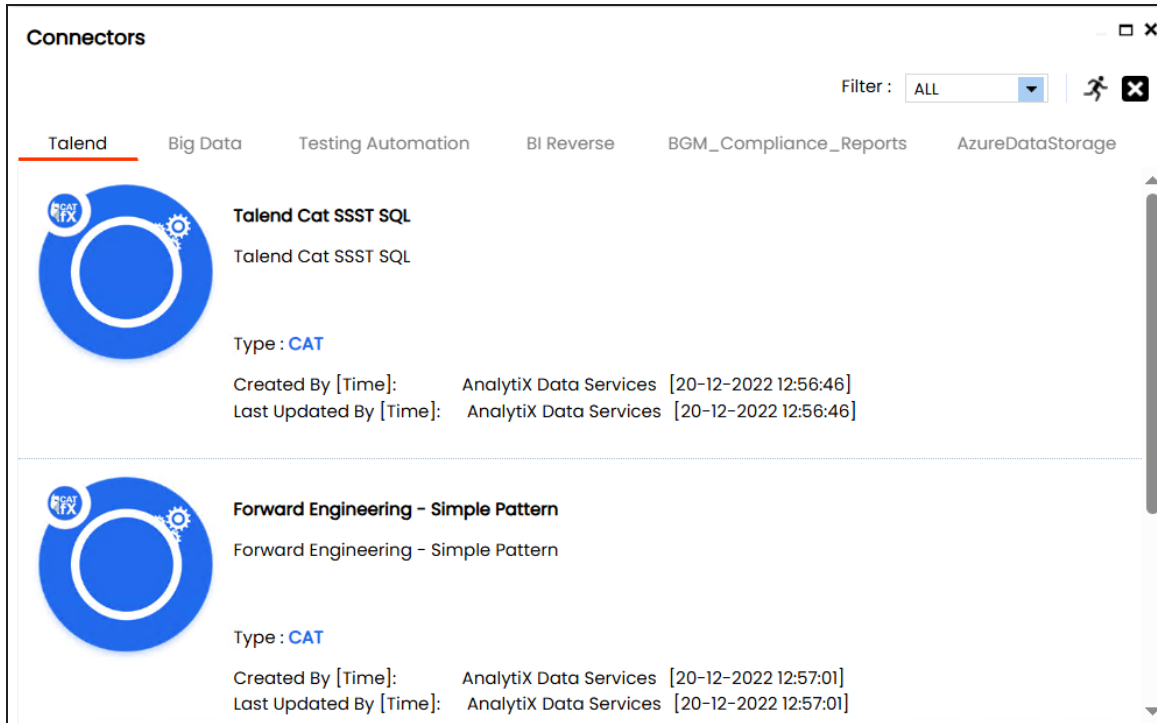


- On the Connectors page, go to relevant tab based on the export requirements and select an ETL tool.

The screenshot below displays Talend tab as an example.

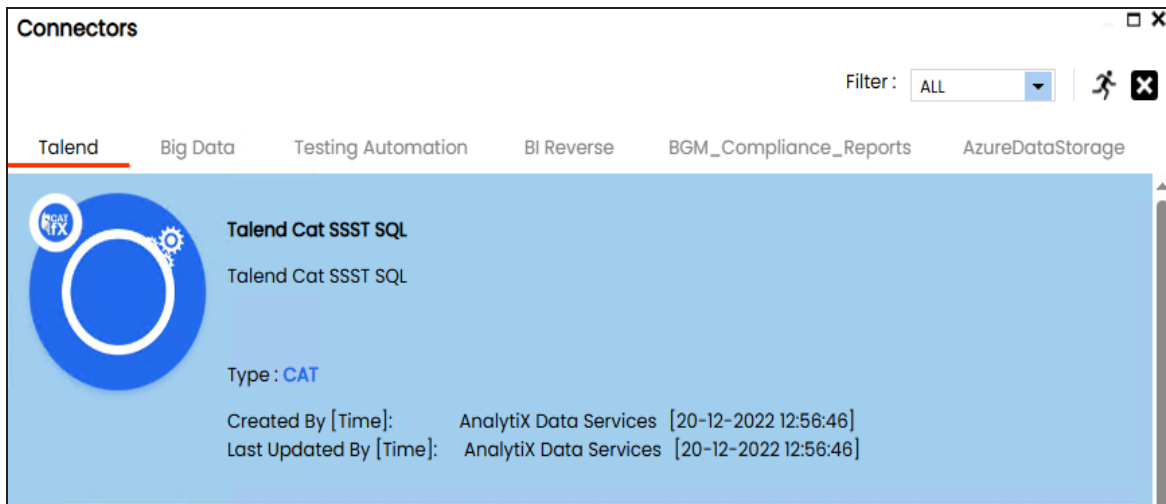


The Multi Mapping page appears.

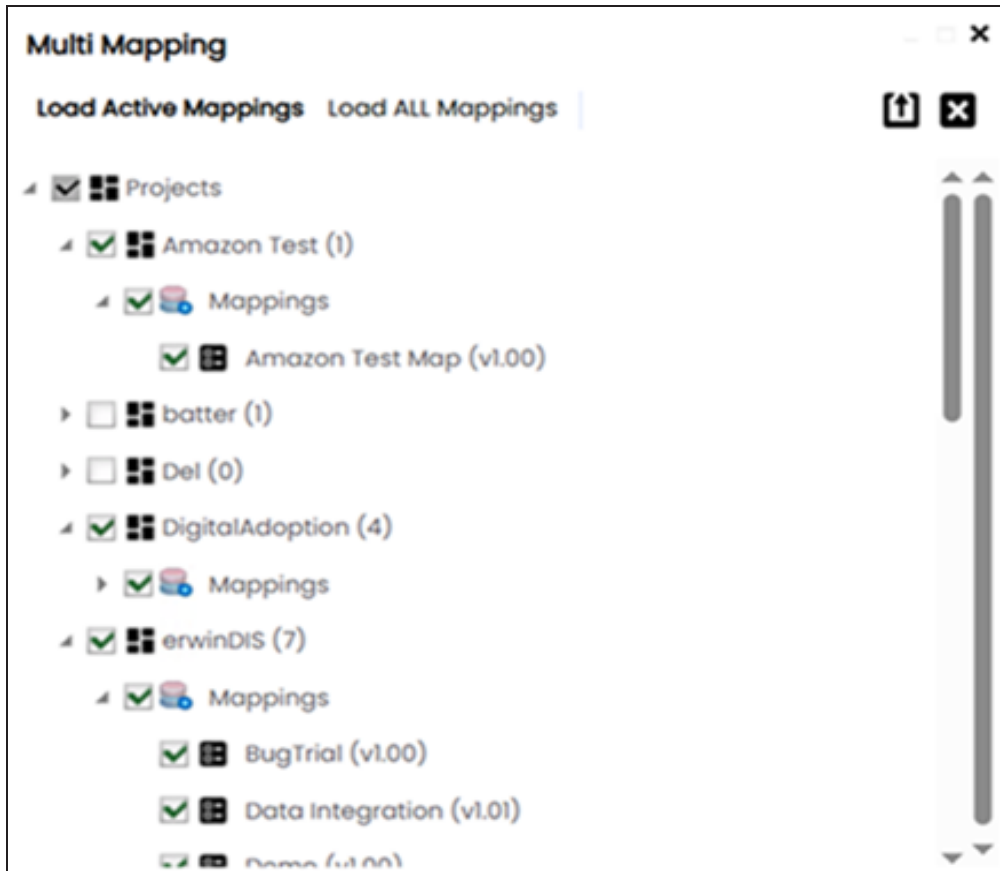

6. Select the required mappings and click .

The following notification appears.

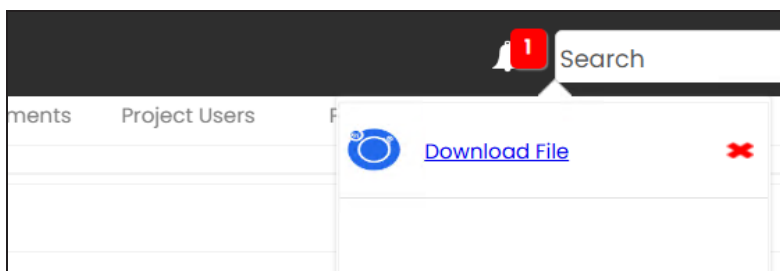

TXT Format

Selected projects and maps are exported and downloaded as a ZIP file. Unzip this file to use mapping specifications in the TXT format.

Creating and Managing Test Cases for Mappings

You can create test cases for testing data mappings and ETL processes in the Mapping Manager for:

- Projects
- Mappings

The test cases created at project-level apply to all the mappings created under the project. Whereas, map-level test cases apply to particular map.

Creating and managing test cases involves:

- [Creating test cases](#)
- [Adding validation steps](#)
- [Adding documents](#)
- [Managing test cases](#)

Creating Test Cases

In the Mapping Manager, you can define test cases at:

- [Project-level](#)
- [Map-level](#)

At the project-level, you can create multiple test cases. Whereas, at the map-level, you can create a single test case.

Creating Project-Level Test Cases

To create project-level test cases, follow these steps.

1. Go to **Application Menu > Data Catalog > Mapping Manager > Workspace Mappings**.
2. Expand a project and click the **Test Case** node.

The Test Case Summary page appears.

#	Test Case Id	Test Case Name	Test Case Label	Type of Testing	Description

3. Click .

The Add New Test Case page appears.



Test cases created for a project are also applicable to the mappings under a project.

Creating Test Cases

Test Case Overview
Validation Steps
Document Upload

Save & Continue
Save & Exit
Cancel

Test Case Name *

Test Case Label

Type of Testing Select

Test SQL Script

Description

Expected Result

4. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Test Case Name	Specifies the name of the test case. For example, Verifying the Completeness of Source Metadata.
Test Case Label	Specifies the unique label for the test case. For example, Source Metadata.
Type of Test- ing	Specifies the type of testing. For example, Metadata Testing.
Test SQL Script	Specifies the SQL script required in the test execution. For example, select * from dbo.ADS_ASSOCIATIONS.
Description	Specifies the test objective in brief. For example: The objective of the test case is to verify the completeness of source metadata.
Expected Result	Specifies the expected result of the test case in detail.

Creating Test Cases

Field Name	Description
	For example: The source table should have 50 columns.
Actual Result	Specifies the actual test result after the execution of the test. For example: The source table has 39 columns.
Testing Comments	Specifies the testing comments about the test case. For example: The source metadata was scanned from a Sql Server database.

5. Click **Save and Exit**.

The test case is created and added to the **Test Cases** node.

Creating Map-Level Test Cases

To create map-level test cases, follow these steps.

1. Go to **Application Menu > Data Catalog > Mapping Manager > Workspace Mappings**.
2. Click a mapping and click the **Test Specification** tab.

It displays the existing project-level test cases.

The screenshot shows the Mapping Manager interface. On the left, a tree view under 'Workspace Mappings' shows 'Erwin_Map (v1.04)' selected. The main area has tabs for 'Mapping Specification', 'Graphical Designer', 'Test Specification' (active), and 'Workflow Log'. Below the tabs is a table of test cases with columns: #, Test Case Id, Test Case Name, Test Case Label, Type of Testing, Description, Priority, Test Case Status, Approved, and Map. The table shows one test case with Test Case Id '9' and Test Case Name 'T_Name'. Below the table is a 'Test Case Overview' section with input fields for Test Case Id, External Test Case Id, Test Case Name, and Test Case Label. The right sidebar shows a 'Metadata' panel with a list of metadata items.

The Add New Test Case page appears.

- Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Test Case Name	Specifies the name of the test case. For example, Verifying the Completeness of Source Metadata.
Test Case Label	Specifies the unique label for the test case. For example, Source Metadata.
Priority	Specifies the priority of the test case. For example, High. Priority for business rules and functional test cases can be medium or higher.
Type of Test-ing	Specifies the type of testing. For example, Metadata Testing.

Creating Test Cases

Field Name	Description
Extendable	Specifies whether the test case is visible even when this map is archived. A map is archived whenever you create a new version of the map.
Test SQL Script	Specifies the SQL script required in the test execution. For example, select * from dbo.ADS_ASSOCIATIONS.
Description	Specifies the test objective in brief. For example: The objective of the test case is to verify the completeness of source metadata.
Expected Result	Specifies the expected result of the test case in detail. For example: The source table should have 50 columns.
Actual Result	Specifies the actual test result after the execution of the test. For example: The source table has 39 columns.
Testing Comments	Specifies the testing comments about the test case. For example: The source metadata was scanned from a Sql Server database.
Test Case Status	Specifies the status of the test case. For example, Passed.
Approved	Specifies whether the test case is approved.

5. Click **Save and Exit**.

The test case is added under the Test Specification tab.

Once a test case is created, you can enrich it by:

- [Adding validation steps](#)
- [Adding documents](#)

[Managing test cases](#) involves:

- Updating test case status
- Approving test cases

- Deleting test cases

Adding Validation Steps

You can add multiple validation steps to the test cases at:

- [Project-level](#)
- [Map-level](#)

You can also specify actual and expected results for each validation step.

Adding Validation Steps to Project-Level Test Cases

To add validations to project-level test cases, follow these steps.

1. In the **Workspace Mappings** pane, expand a project and click the **Test Case** node. The Test Case Summary pane appears.

The screenshot shows the 'Test Case Summary' pane. On the left is the 'Workspace Mappings' tree with 'Test Cases' selected. The main area displays a table of test cases. Below the table are tabs for 'Test Case Overview', 'Validation Steps', and 'Document Upload'. The 'Test Case Overview' tab is active, showing input fields for 'Test Case Id' (9), 'Test Case Label', and 'Test Case Name*' (T_Name). There are 'Save' and 'Cancel' buttons.

#	Test Case Id	Test Case Name	Test Case Label	Type of Testing	Description	Created By
1	9	T_Name				Administrator

Records from 1 to 1 | Page 1 | 25 rows per page

Test Case Overview | Validation Steps | Document Upload

Test Case Id: 9

Test Case Label:

Test Case Name*: T_Name

Save Cancel

2. Click .

The Add Validation Steps page appears.

Adding Validation Steps

Save
Cancel

Validation Step Type Select ▼

Step Name*

Description

Expected Result

Actual Result

3. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Validation Step Type	Specifies the type of validation step. For example, Data Check.
Step Name	Specifies the unique name of the step. For example, Validating Number of Columns.
Description	Specifies the description of the validation step. For example: This step validates the number of columns in the source metadata.
Expected Result	Specifies the expected result in detail. For example: The source table, dbo.ADS_ASSOCIATIONS should have 50 columns.
Actual Result	Specifies the actual test result after the execution of the test. For example: The source table contains 50 columns.
Test Step Com-	Specifies the comments about the step.

Adding Validation Steps

Field Name	Description
ments	For example: The source metadata was scanned from a Sql Server database.

4. Click **Save**.

The validation step is added to the test case.

Adding Validation Steps to Map-Level Test Cases

To add validations to map-level test cases, follow these steps.


1. In the **Workspace Mappings** pane, expand a project and click a mapping.
2. Click the **Test Specification** tab.
3. Double-click a map-level test case.

The Test Case Summary pane appears.

The screenshot displays the Erwin software interface. On the left, the 'Workspace Mappings' pane shows a tree structure with 'Erwin_Map (v1.04)' selected. The main area is divided into tabs: 'Mapping Specification', 'Graphical Designer', 'Test Specification' (active), and 'Workflow Log'. The 'Test Specification' tab contains a table with columns: '#', 'Test Case Id', 'Test Case Name', 'Test Case Label', 'Type of Testing', 'Description', 'Priority', 'Test Case Status', 'Approved', and 'Map'. The table lists three test cases, with the second one, 'Erwin_Test' (ID 11), selected. Below the table, the 'Test Case Overview' pane shows fields for 'Test Case Id' (11), 'Test Case Name' (Erwin_Test), 'Test Case Label', 'Priority', 'Type of Testing', 'External Test Case Id', and 'Extendable' (checkbox). On the right, the 'Metadata Catalogue' pane shows a list of metadata items, including '3rd Party Flat Files', 'A_System', 'AdventureWorks', 'AMERISURE', 'Atlas Sales System', 'BI', 'BO Reports', 'Customer Order Entry', 'Data Lake', 'Data Models', 'EDW', 'erwinDIS', 'JDEdwards', 'New_Erwin', 'ODS', 'PeopleSoft', 'Salesforce', 'SAP', and 'T_New'.

4. In the bottom pane, click the **Validation Steps** tab.

The Validation Steps tab appears.

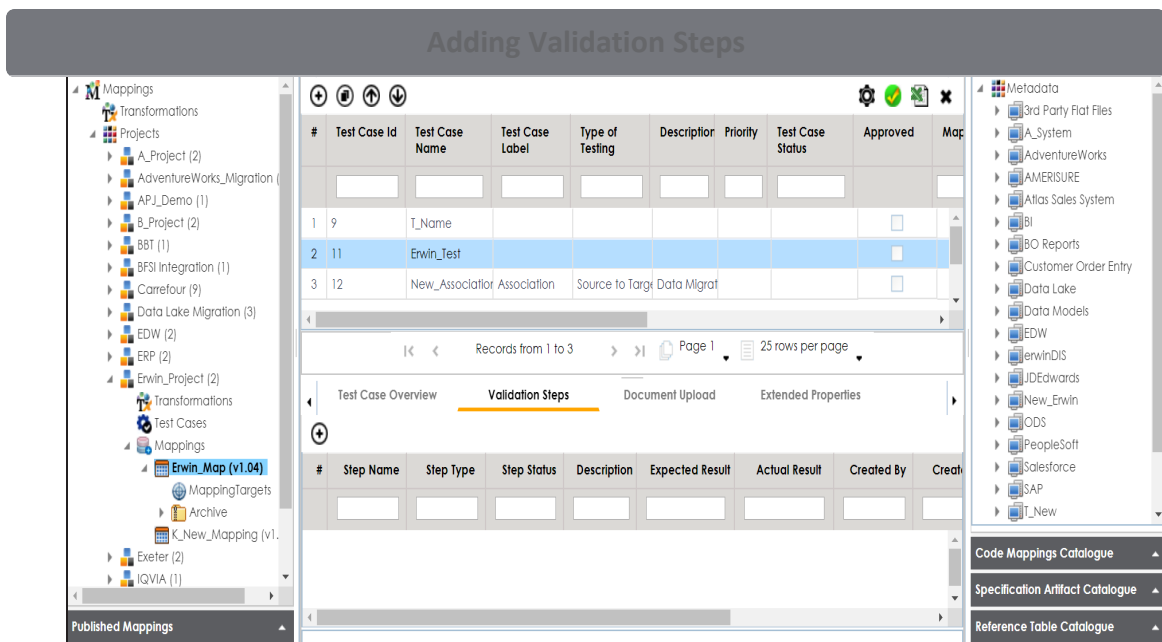

5. Click .

The Add New Step page appears.


Add New Test Step


Step Name*

Validation Step Type: Step Status:

Description 

Expected Result 

Actual Result 

Test Step Comments 

Save Cancel

6. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Adding Validation Steps	
Field Name	Description
Step Name	Specifies the unique name of the step. For example, Validating Number of Columns.
Validation Step Type	Specifies the type of the validation step. For example, Data Check.
Step Status	Specifies the status of the step. For example, Passed.
Description	Specifies the description about the validation step. For example: This step validates the number of columns in the source metadata.
Expected Result	Specifies the expected result in detail. For example: The source table, dbo.ADS_ASSOCIATIONS should have 50 columns.
Actual Result	Specifies the actual test result after the execution of the test. For example: The source table contains 50 columns.
Expected Result	Enter the expected result in detail, including the error-message that is displayed on screen.
Test Step Comments	Specifies the comments about the step. For example: The source metadata was scanned from a Sql Server database.

7. Click **Save**.

The validation step is added to the test case.

Adding Documents

You can add supporting documents such as text files, audio files, video files, and so on to a test case at:


- [Project-level](#)
- [Map-level](#)

Adding Documents to Project-Level Test Cases

To add documents to project-level test cases, follow these steps.

1. In the **Workspace Mappings** pane, click the **Test Cases** node of a project.

The Test Case Summary pane appears.

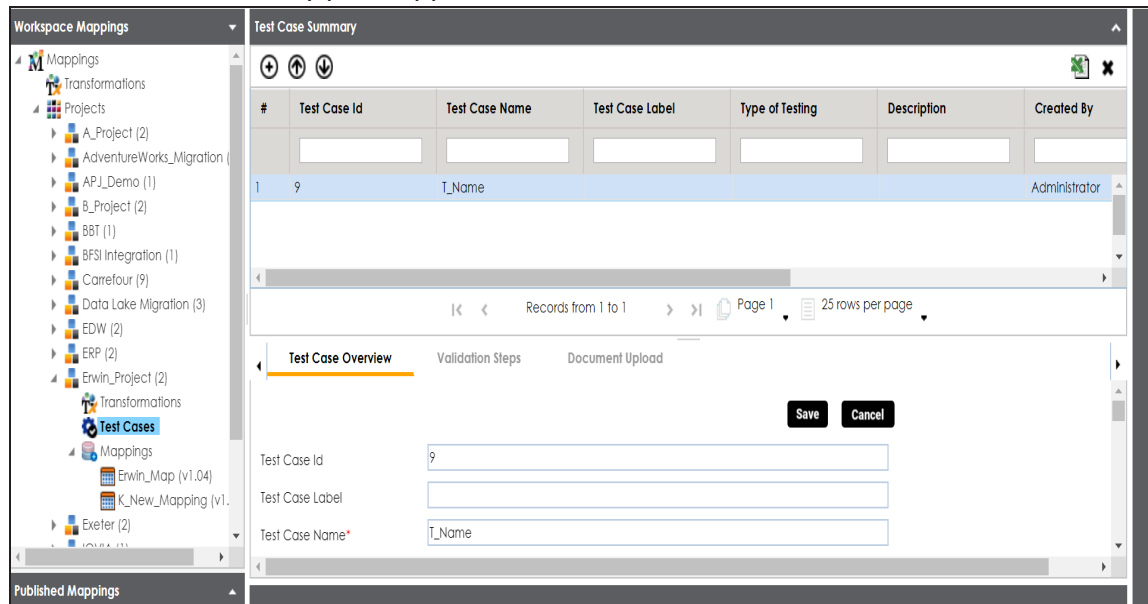

2. In the bottom pane, click **Document Upload** and click .

The Add Test Case Document page appears.

Adding Documents

Document Name*

Document Object

Intended Use Description

Approval Required Flag ☐

Document Owner

Document Link

Drag-n-Drop files here or click to select files for upload.


3. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Field Name	Description
Document Name	Specifies the name of the added document to the test case. For example, Source Metadata Details.
Document Object	Drag and drop document files or use to select and upload documents.
Document Owner	Specifies the document owner's name. For example, John Doe.
Document Link	Specifies the URL of the document. For example, https://drive.google.com/file/d/2sC2_SZlYeFKI7OOn-b5YkMBq4ptA7jh5/view
Intended Use Description	Specifies the intended use of the document. For example: The document has information about the source metadata.

Adding Documents	
Field Name	Description
Approval Required Flag	Specifies whether the document requires approval. Select the Approval Required Flag check box to select the document status.
Document Status	Specifies the status of the document. For example, In Progress. This field is available only when the Approval Required Flag check box is selected.

4. Click **Save**.

The document is added to the test case and saved under the **Document Upload** tab.

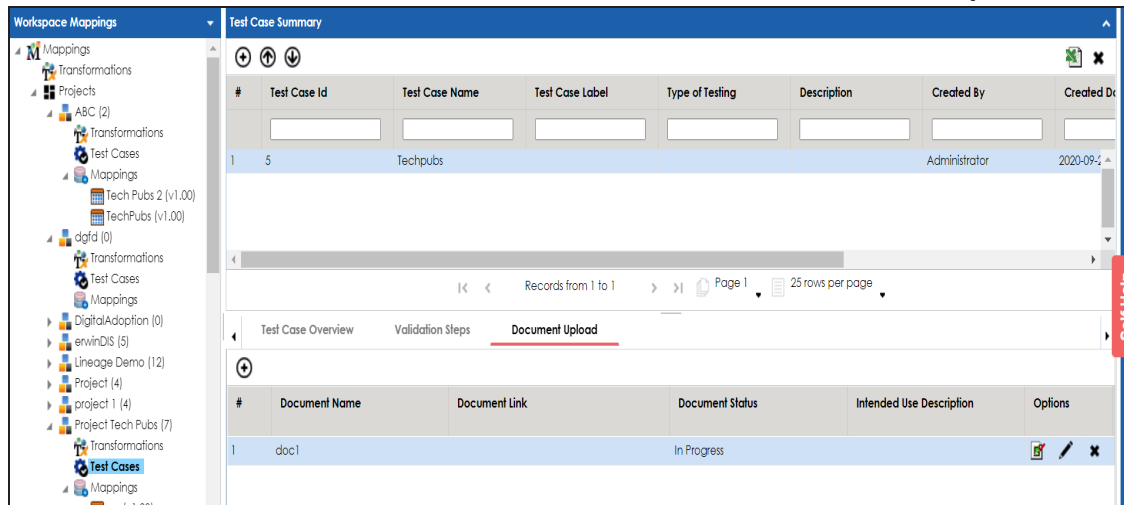

Once a supporting document is added, use the following options:

Preview (📄)

Use this option to preview the document.

Edit (✎)

Use this option to update the document details.

Delete (✖)

Use this option to delete the document that is not required.

Adding Documents to Map-Level Test Cases

To add documents to map-level test cases, follow these steps.

1. In the **Workspace Mappings** pane, click a mapping and click the **Test Cases** node of a project.
2. Double-click a map-level test case.

The Test Overview page appears.

The screenshot shows the 'Test Overview' page within the 'Test Specification' tab. The left pane displays the 'Workspace Mappings' tree, with 'Erwin_Map (v1.04)' selected under 'Test Cases'. The main area features a table of test cases and a form for editing the selected test case.

#	Test Case Id	Test Case Name	Test Case Label	Type of Testing	Description	Priority	Test Case Status	Approved	Map
1	9	T_Name						☐	
2	11	Erwin_Test						☐	
3	12	New_Associator	Association	Source to Target	Data Migrat			☐	

Records from 1 to 3 | Page 1 | 25 rows per page

Test Case Overview | Validation Steps | Document Upload | Extended Properties

Test Case Id: 11 | External Test Case Id:


Test Case Name*: Erwin_Test

Test Case Label: | Priority:

Type of Testing: | Extendable: ☐

The right pane shows the 'Metadata Catalogue' with various system and application names listed.

3. Click the **Document Upload** tab.

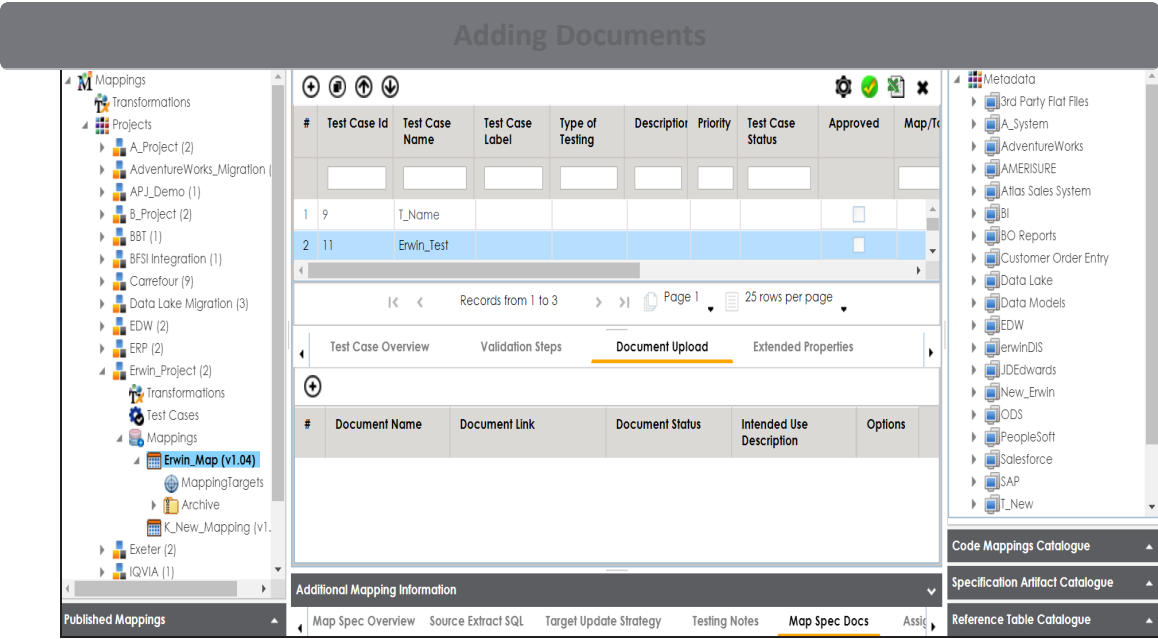

4. Click .

The Add Test Case Document page appears.

Add Test Case Document

Document Name* Document Owner

Document Object Document Link

Intended Use Description

Approval Required Flag ☐

5. Enter appropriate values in the fields. Fields marked with a red asterisk are mandatory. Refer to the following table for field descriptions.

Adding Documents	
Field Name	Description
Document Name	Specifies the name of the physical document being attached to the test case. For example, Source Metadata Details.
Document Object	Drag and drop document files or use  to select and upload document files.
Document Owner	Specifies the document owner's name. For example, John Doe.
Document Link	Specifies the URL of the document. For example, https://drive.google.com/file/d/2sC2_SZlYeFKI7OOn-b5YkMBq4ptA7jhg5/view
Intended Use Description	Specifies the intended use of the document. For example: The document has information about the source metadata.
Approval Required Flag	Specifies whether the document requires approval. Select the Approval Required Flag check box to select the document status.
Document Status	Specifies the status of the document. For example, In Progress. This field is available only when the Approval Required Flag check box is selected.

6. Click **Save**.

The document is added to the test case.

Once a supporting document is added, use the following options:

Preview ()

Use this option to preview the document.

Edit ()

Use this option to update the document details.

Delete

Use this option to delete the document that is not required.

Managing Test Cases

Managing [project-level](#) or [map-level](#) test cases involve:


- Updating test cases
- Exporting test cases
- Deleting test cases

Managing Project-Level Test Cases

To update project-level test cases, follow these steps

To update test cases, follow these steps:

1. In the **Workspace Mappings** pane, click the **Test Cases** node.

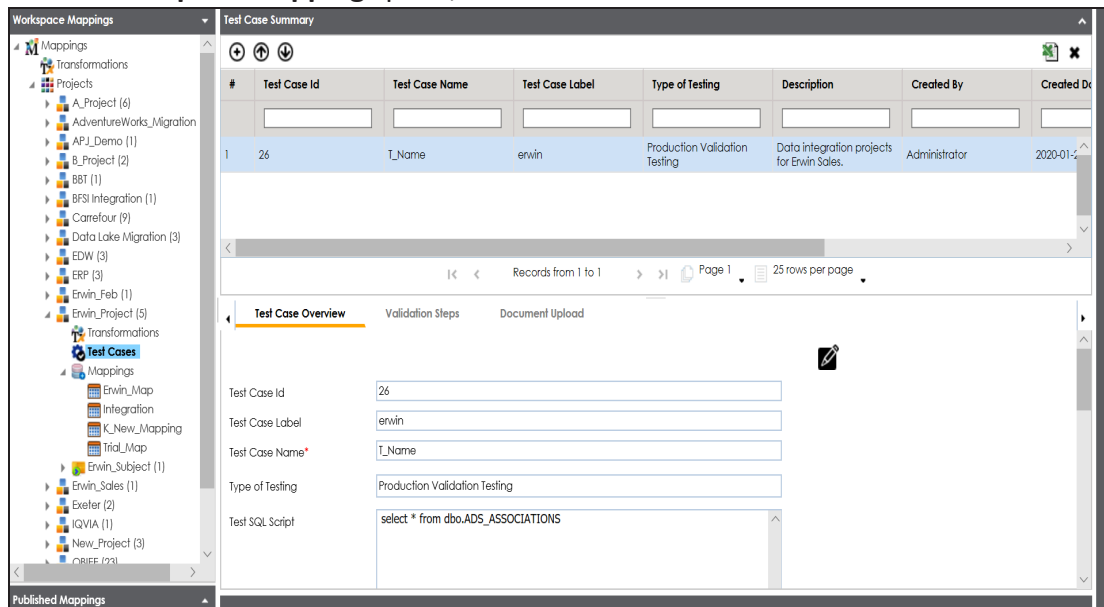

2. In the **Test Case Summary** pane, click the required test case.
3. In the **Test Case Overview** tab, click .
4. Update the necessary information.
For more information on fields, refer to [Creating Test Cases](#) topic.

Managing Test Cases


To export a test case, click the test case in the **Test Case Summary** pane, and click .

To delete a test case, click the test case in the **Test Case Summary** pane, and click .

Managing Map-Level Test Cases


To update map-level test case, follow these steps:

1. In the **Workspace Mappings** pane, click a map and click the **Test Specification** tab.

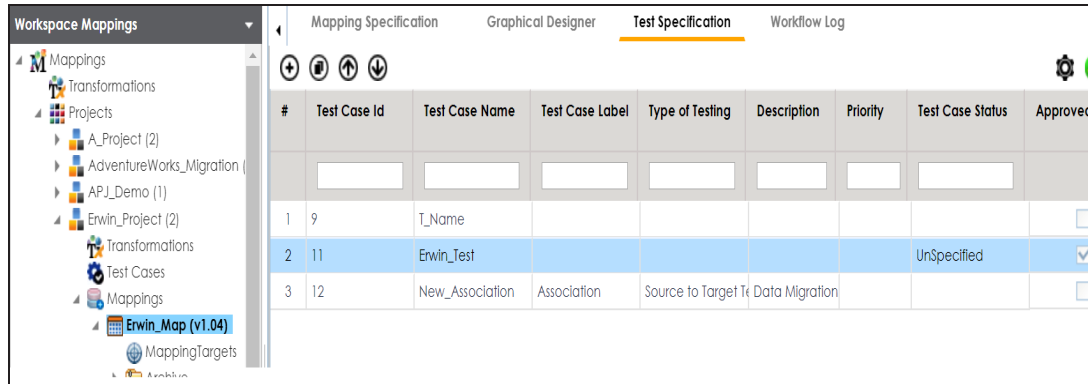


2. Click .

The Map and Test Cases Status page appears. You can update test case status in the Test Cases Grid and Map Test Status in the bottom pane.

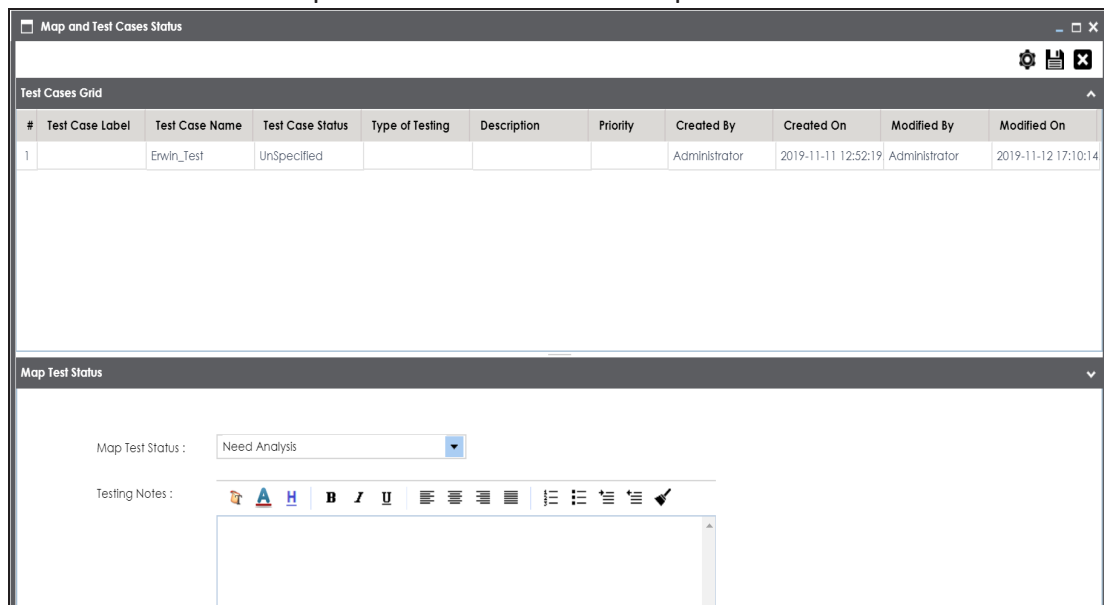


Managing Test Cases

1. In the **Workspace Mappings** pane, click a mapping, and click the **Test Specification** tab.

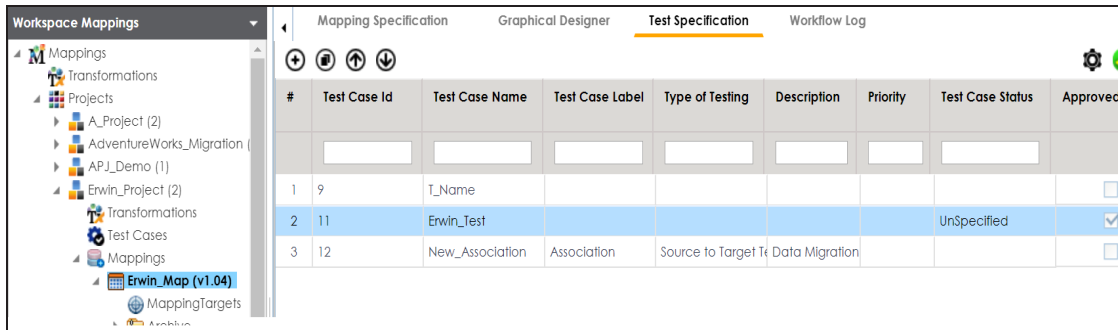

2. Click .

The Approved Test Cases page appears.

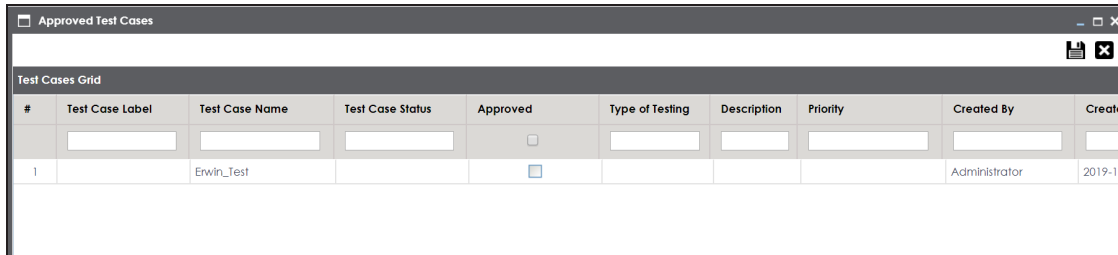

3. Select the check box against the test case under the **Approved** column.
4. Click **Save**.

To export a test case, click the test case in the **Test Case Summary** pane, and click .

To delete a test case, click the test case in the **Test Case Summary** pane, and click .

Viewing Mapping Manager Dashboard

The Mapping Manager Dashboard displays metrics that help you analyze and track your projects and mappings. It presents this information using charts and graphs.


To access Mapping Manager Dashboard, follow these steps:

1. Go to **Application Menu > Data Catalog > Mapping Manager**.

Project Summary			
#	Project Name	Project Description	Project Ow
6	WhatfixIntegration	<iframe id="editoremb" tabindex="-1" style="position: absolute; width: 0px; height: 0px; border: none; left: -1000px; top: -1000px;"></iframe>	
7	ABC	<iframe id="editoremb" tabindex="-1" style="position: absolute; width: 0px; height: 0px; border: none; left: -1000px; top: -1000px;"></iframe>	
8	TechPubs		
9	Tech Pubs Online	<iframe id="editoremb" tabindex="-1" style="position: absolute; width: 0px; height: 0px; border: none; left: -1000px; top: -1000px;"></iframe>	
Mapping Manager Dashboard			

2. Click the **Mapping Manager Dashboard** pane.

The Mapping Manager Dashboard appears.

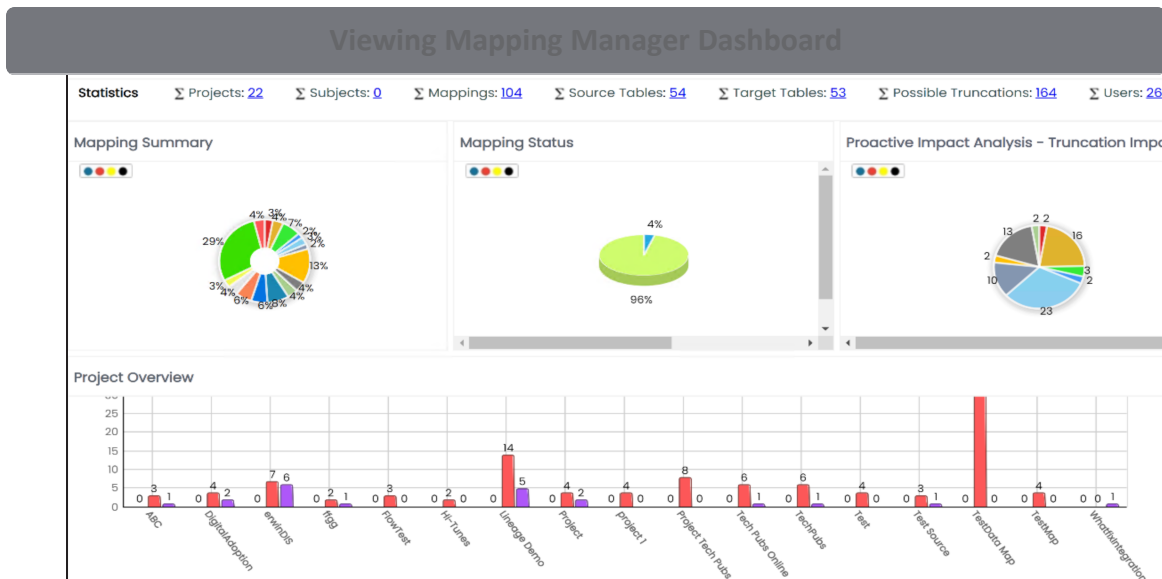

It displays the following panes:

- **Statistics**: It displays a snapshot of statistics related to mapping projects.
- **Mapping Summary**: It displays the number of mappings in each project.
- **Mapping Status**: It displays the number of mappings in each mapping state.
- **Proactive Impact Analysis - Truncation Impacts**: It displays the number of instances of source truncation in each project.
- **Project Overview**: It displays the number of subjects, mappings, and assigned users in each project.
- **Mapping Classification**: It displays the number of active, archived, and published mappings in each project.
- **Mapping Assignments**: It displays the number of designers, approvers, developers, and testers assigned to mappings
- **Sources/Targets Not Mapped**: It displays the number of sources and targets not mapped in each project.
- **Test Case Status**: It displays the number of test cases under a test case status.
- **Project Test Cases**: It displays the number of test cases in each project.
- **User Test Cases**: It displays the number of test cases created by each user.

Statistics

The Statistics pane displays the total number of projects, subjects, mappings, source tables, target tables, possible truncations, and users. For example, in the following image there are sixteen projects, eighty-six mappings, forty-four source tables, forty-six target tables, eighty-four possible truncations, and four users.


Statistics	Σ Projects: 16	Σ Subjects: 0	Σ Mappings: 86	Σ Source Tables: 44	Σ Target Tables: 46	Σ Possible Truncations: 84	Σ Users: 4	⏻
------------	--------------------------------	-------------------------------	--------------------------------	-------------------------------------	-------------------------------------	--	----------------------------	---

You can click the hyperlink to view further details. For example, if you click the hyperlink for the Target Tables. The Target Table Details page appears.

Target Tables Details			
#	Table Name	Environment Name	System Name
1	Account	erwinSales	SQLTechPubs
2	Account	Presentation Layer	TABLEAU
3	Account	Presentation Layer	TABLEAU
4	Account	PRESENTATION LAYER	TABLEUAU
5	Account	TechPubs	PRESENTATION LAYER
6	Account	TechPubs	Salesforce
7	APPQOSSYS.WLM_CLASSIFIER_PLAN	TechPubs	Oracle
8	APPQOSSYS.WLM_CLASSIFIER_PLAN	TechPubs	Oracle

Mapping Summary

The Mapping Summary pane displays the number of mappings in each project in a pie chart. To open the chart in the Dashboard View, click the pie-chart.

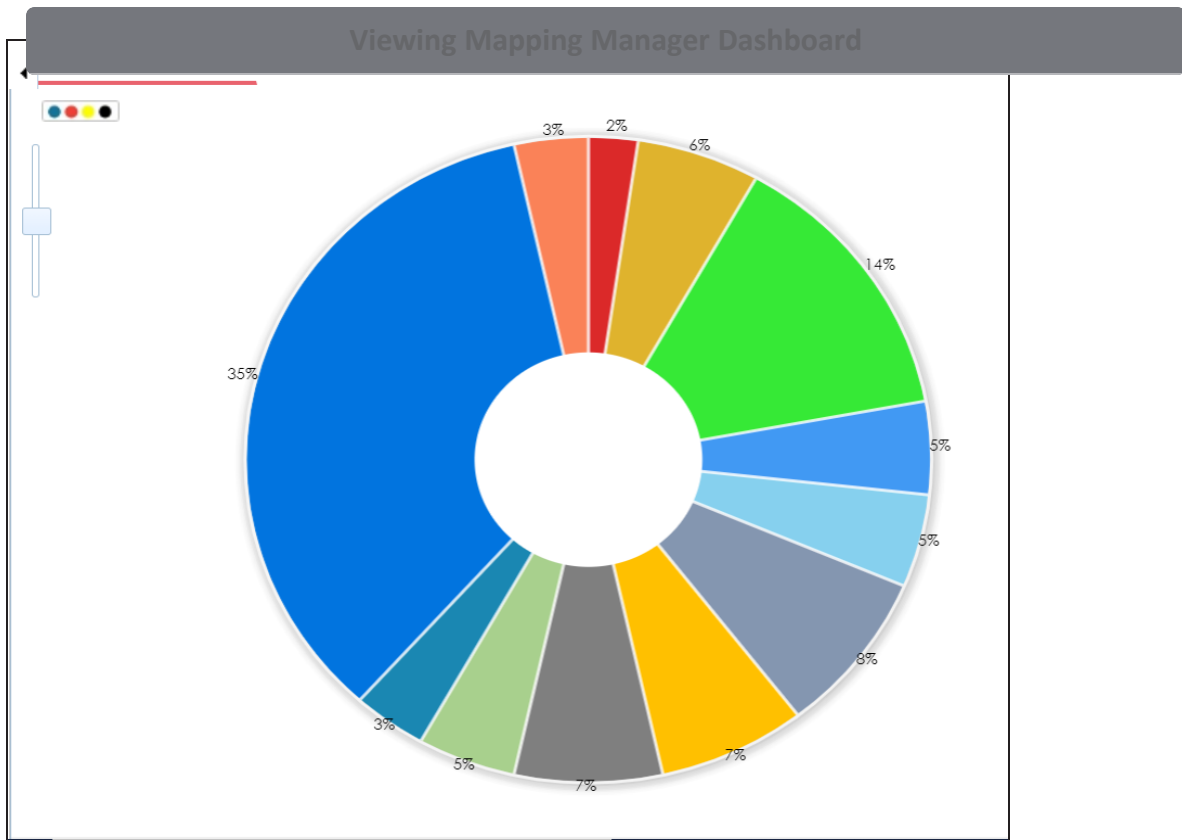

Each slice of the pie chart corresponds to a project. You can drill down and view detailed information in the list format. To view detailed information about mappings in a project, click a slice. The Details View tab opens. It displays project name, subject name, map name, and map version.


Viewing Mapping Manager Dashboard

Dashboard View Details View				
#	Project Name	Subject Name	Map Name	Map Version
1	Lineage Demo		Informatica_m_CBDR_BDM_CASA	1.00
2	Lineage Demo		Talend_staging	1.00
3	Lineage Demo		test	1.00
4	Lineage Demo		TestDataMap1	1.00
5	Lineage Demo		TestMap2	1.00
6	Lineage Demo		TestMap3	1.00
7	Lineage Demo		Tech Pubs	1.00
8	Lineage Demo		Create a New Map	1.00
9	Lineage Demo		how	1.00
10	Lineage Demo		Account Tableau Report	1.02
11	Lineage Demo		Line Mapping	1.00
12	Lineage Demo		map map	1.00

Mapping Status

The Mapping Status pane displays the number of mappings under each mapping state in a pie chart. By default there are two mapping states, In Progress and Approved. You can create your own mapping states depending on your requirements. For more information on creating mapping states, refer to the [Configuring Mapping State Settings](#) topic.

To open the chart in the Dashboard View, click the pie chart.

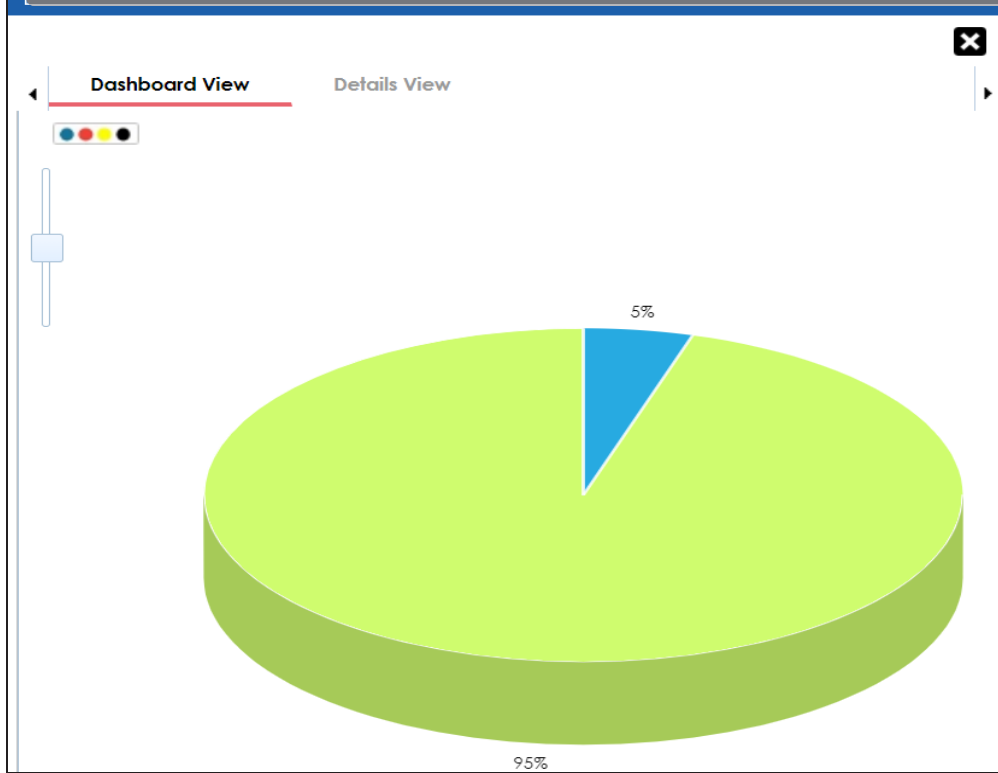

Each slice corresponds to a mapping state. You can drill down and view detailed information in the list format. To view detailed information about maps in a mapping state, click a slice of the pie-chart.

Mapping Manager Dashboard

Mapping Status


Dashboard View Details View

#	Project Name	Subject Name	Map Name	Map Version	State Name
1	erwinDIS		Data Integration	1.00	Approved
2	erwinDIS		SalesforceIntegratic	1.00	Approved
3	erwinDIS		BugTrial	1.00	Approved
4	erwinDIS		erwinSalesIntegratic	1.01	Approved

Proactive Impact Analysis - Truncation Impacts

The Proactive Impact Analysis - Truncation Impacts pane displays the number of instances where the target column length is smaller than the source column length in each project in a pie-chart. To open the chart in the Dashboard View, click the pie chart.

Viewing Mapping Manager Dashboard

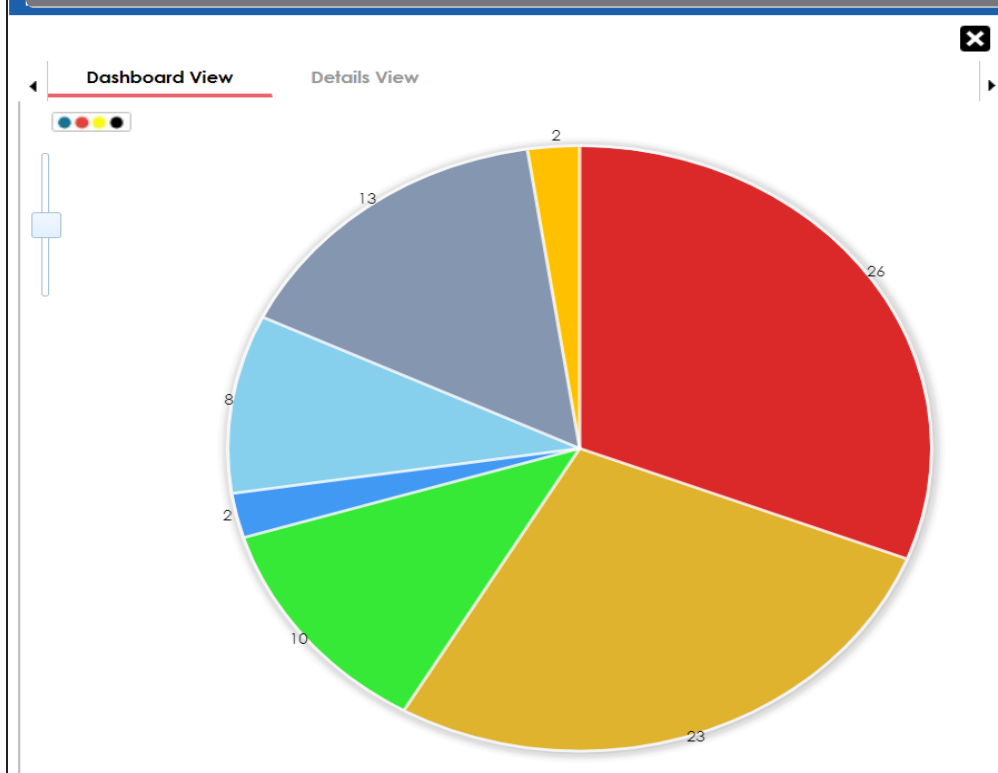


Each slice of the pie chart corresponds to a project. You can drill down and view detailed information in the list format.

To view detailed information about truncated sources in a project, click a slice of the pie chart. The Details View tab opens. It displays project name, subject name, map name, source and target column names.

Dashboard View		Details View										
#	Project Name	Subject Name	Map Name	Source Table Name	Target Table Name	Source Column Name	Target Column Name	Source Column Length	Source Column Precision	Target Column Length	Target Column Precision	Map Version
1	Test Source		mo.SIGTPCH_SF10000	TPCH_SF10000.LINEITEM	stg.STG_LINEITEM	L_LINENUMBER	LINEITEM_HSH	38		16		1.00
2	Test Source		mo.SIGTPCH_SF10000	TPCH_SF10000.LINEITEM	stg.STG_LINEITEM	L_LINENUMBER	LINEITEM_HSH_DIFF	38		16		1.00
3	Test Source		mo.SIGTPCH_SF10000	TPCH_SF10000.LINEITEM	stg.STG_LINEITEM	L_ORDERKEY	TPCH_SF10000.ORDERKEY	38		16		1.00
4	Test Source		mo.SIGTPCH_SF10000	TPCH_SF10000.LINEITEM	stg.STG_LINEITEM	L_PARTKEY	TPCH_SF10000.PART_H	38		16		1.00

Project Overview

The Project Overview pane displays the number of subjects, mappings, and assigned users in each project in a bar graph. To open bar graph in the Dashboard View, click the bar graph.

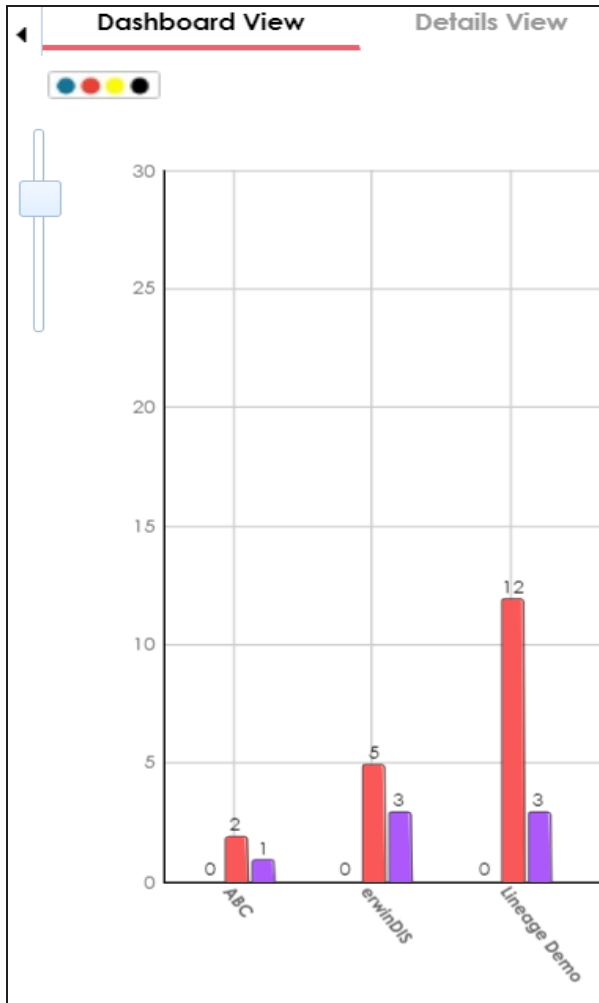

Each set of three bars corresponds to a project. You can view detailed information in the list format. To view the Detailed information about mappings, subjects, or assigned users of a project click the corresponding bar. For example, if you click the mappings bar then the Mappings tab opens.

Viewing Mapping Manager Dashboard				
← Mappings Subjects Assigned Users				
#	Project Name	Subject Name	Map Name	Map Version
1	erwinDIS		Data Integration	1.00
2	erwinDIS		SalesforceIntegration	1.00
3	erwinDIS		BugTrial	1.00
4	erwinDIS		TechPubsBUGTrial	1.00
5	erwinDIS		erwinSalesIntegration	1.01


To view a list of subjects, click the **Subjects** tab.

To view a list of the assigned users, click the **Assigned Users** tab.

Mapping Classification

The Mapping Classification pane displays the number of active, archived, and published mappings in each project in a bar graph. To open the bar graph in the Dashboard View, click the bar graph.

Viewing Mapping Manager Dashboard

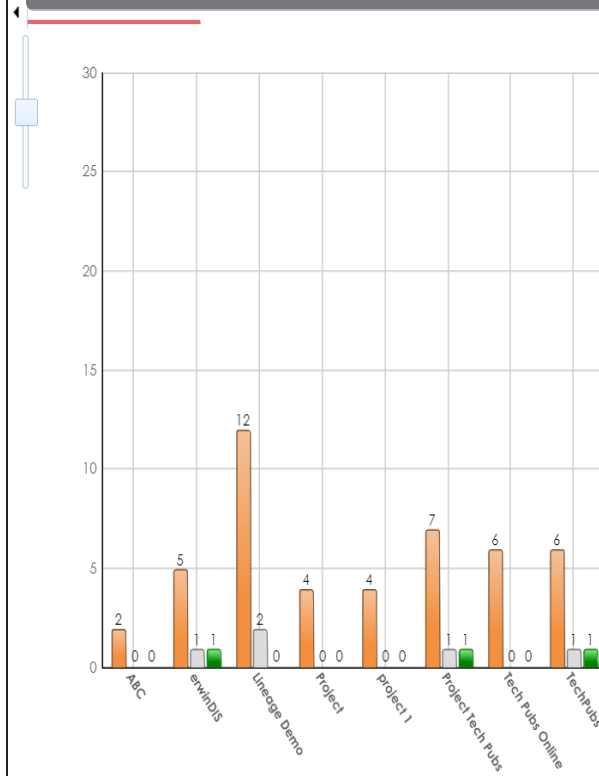


Each set of three bars corresponds to a project. You can drill down and view detailed information. To view detailed information about status of mappings in a project, click a bar. The Details View tab opens. It displays project name, subject name, map name, map version, and status.

Dashboard View Details View						
#	Project Name	Subject Name	Map Name	Map Version	Status	Map Published
1	erwinDS		BugTrial	1.00	Active	
2	erwinDS		Data Integration	1.00	Active	
3	erwinDS		erwinSalesIntegration	1.00	Passive	✓
4	erwinDS		erwinSalesIntegration	1.01	Active	
5	erwinDS		SalesforceIntegration	1.00	Active	
6	erwinDS		TechPubsBugTrial	1.00	Active	

Mapping Assignments

The Mapping Assignments pane displays the number of designers, approvers, developers, and testers assigned to mappings in each project in a bar graph. For more information on mapping assignments, refer to the [Assigning Mapping Specifications to Users](#) topic.

To open the bar graph in the Dashboard View, click the bar graph.

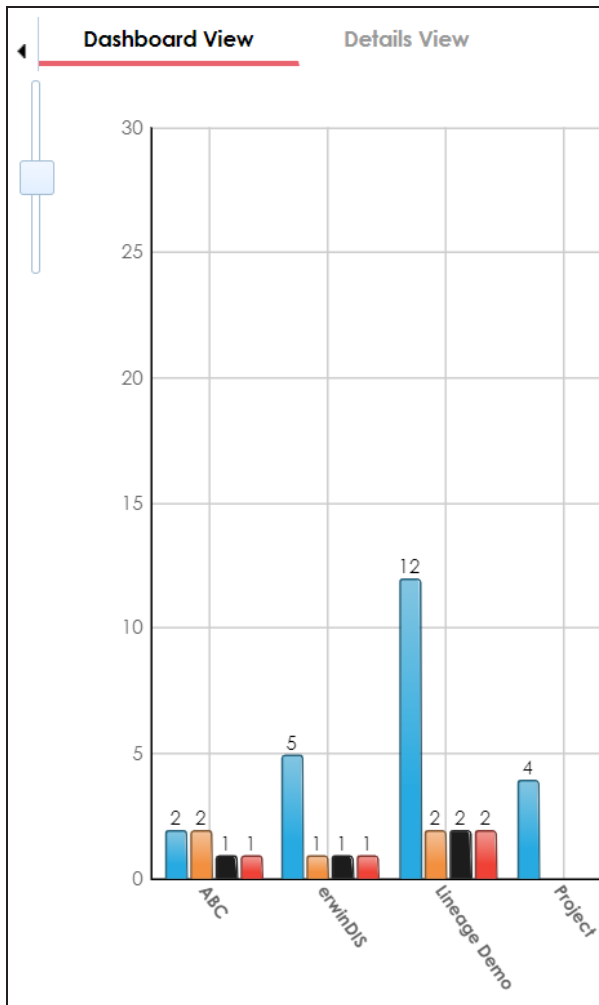

Each set of three bars corresponds to a project. You can drill down and view detailed information in the list format. To view detailed information about mapping assignments in a pro-


Viewing Mapping Manager Dashboard

name, assigned user's full name, and assignment status.

Dashboard View		Details View						
#	Project Name	Subject Name	Map Name	Map Description	Assignee Full Name	Responsibility	Assignment Status	Last Modified By
1	erwinDIS		Data Integr		Administrator	Mapping D	In Progress	Administrator
2	erwinDIS		SalesforceL		Administrator	Mapping D	In Progress	Administrator
3	erwinDIS		BugTrial	Testing for c	Saras Ojha	Mapping A	Not Started	Administrator
4	erwinDIS		BugTrial	Testing for c	Administrator	Mapping D	In Progress	Administrator
5	erwinDIS		BugTrial	Testing for c	Jane Doe	Mapping E	Not Started	Administrator
6	erwinDIS		BugTrial	Testing for c	public - De	Mapping T	Not Started	Administrator
7	erwinDIS		TechPubsBl	TechPubsBl	Administrator	Mapping D	In Progress	Administrator
8	erwinDIS		erwinSalesL		Administrator	Mapping D	In Progress	Administrator

Sources/Targets Not Mapped

The Sources/Targets Not Mapped pane displays the number of sources and targets not mapped in each project in a bar graph. To open the bar graph in the Dashboard View, click the bar graph.

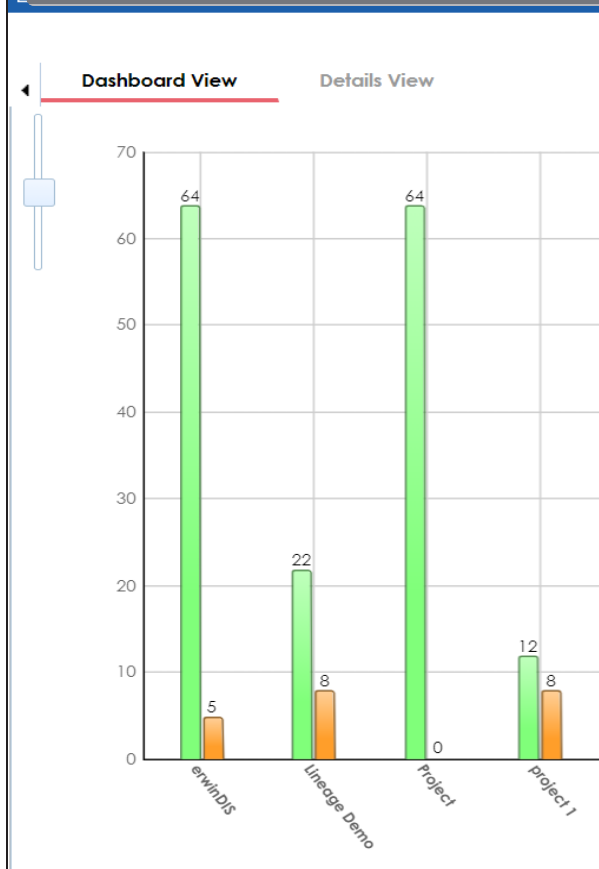


Each set of two bars corresponds to a project. You can drill down and view detailed information in the list format. To view the detailed information about sources and target not mapped in a project, click a bar. The Details View tab opens. It displays project name, map name, and target and source details.

Viewing Mapping Manager Dashboard							
Targets Not Mapped				Sources Not Mapped			
#	Project Name	Subject Name	Map Name	Target System Name	Target Environment Name	Target Table Name	Target Column Name
1	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	SQN_NUM
2	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	LOAD_DTS
3	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	REC_SRC
4	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	MLTID
5	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	BKCC
6	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	BWSC
7	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	SQN_NUM
8	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	LOAD_DTS
9	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	REC_SRC
10	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	MLTID
11	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	BKCC
12	Lineage Demo		Account Tableau	Snowflake	Snowflake_STG	stg.STG_LINEITEM	BWSC
13	Lineage Demo		map.map(1.00)	erwin DM	DM Landing	Citizens	CitizenID

Test Case Status

The Test Case Status pane displays the number of test cases under a test case status in a pie chart. To open the chart in the Dashboard View, click the pie chart.

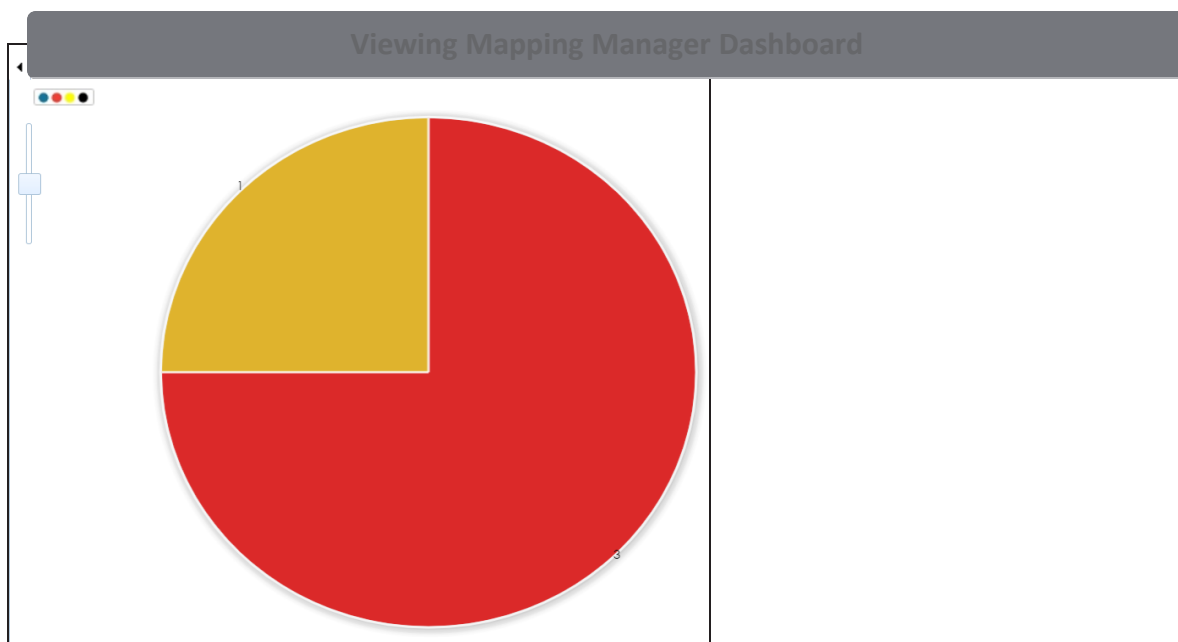


Each slice of the pie chart corresponds to a test case status. You can drill down and view detailed information in the list format. To open the detailed information about test cases, click a slice. The Details View tab opens. It displays project name, map name, and test case names.

Dashboard View		Details View				
#	Project Name	Subject Name	Map Name	Test Case Id	Test Case Name	Test Case Label
1	Lineage Demo			3	ETL Testing	Alpha
2	Lineage Demo		Account Table	4	Account_Tak	
3	erwinDIS			1	Validating sc	Alpha

Project Test Cases

The Project Test Cases pane displays the number of test cases in each project in a pie-chart. To open the chart in the Dashboard View, click the pie chart.

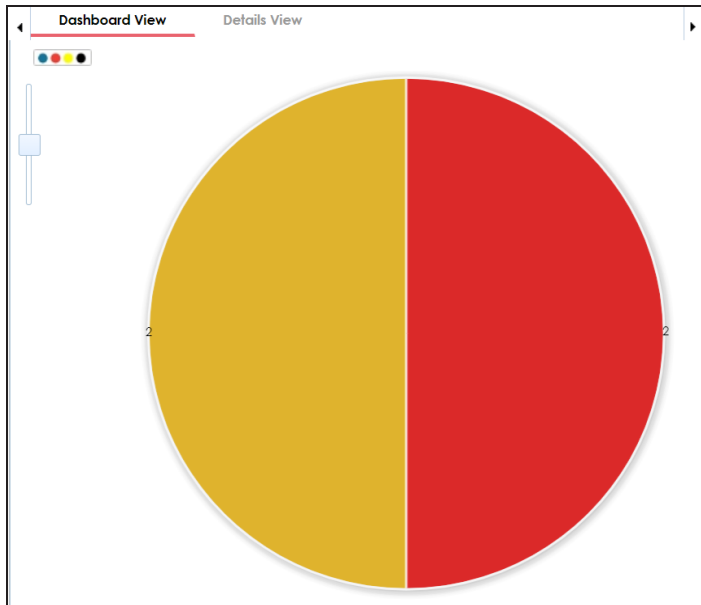


Each slice in the pie chart corresponds to a project. You can drill down and view detailed information in the list format.

To view the detailed information about test cases in a project, click a slice of the pie chart. The Details View tab opens. It displays project name, subject name, map name, test case ID, test case name, and test case label.

Dashboard View Details View						
#	Project Name	Subject Name	Map Name	Test Case Id	Test Case Name	Test Case Label
1	erwinDIS			1	Validating sour	Alpha
2	erwinDIS		Data Integration	2	Customer-Acc	Alpha

User Test Cases

The User Test Cases pane displays the number of test cases created by each user in a pie chart. To open the chart in the Dashboard View, click the pie chart.

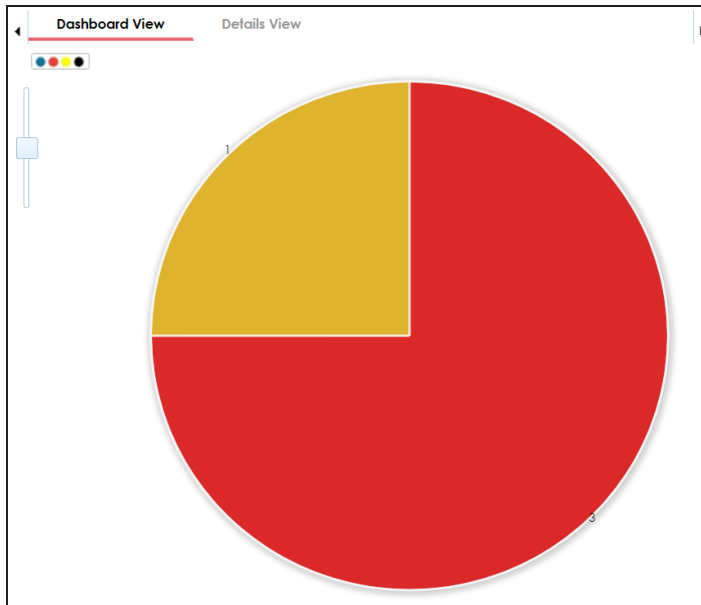

Each slice of the pie chart corresponds to a user. You can drill down to view detailed information in the list format.

To view the detailed information about test cases created by a user, click a slice of the pie chart. The Details View tab opens. It displays project name, subject name, map name, test case ID, test case name, and test case label.

Dashboard View Details View						
#	Project Name	Subject Name	Map Name	Test Case Id	Test Case Name	Test Case Label
1	Lineage Demo			3	ETL Testing	Alpha
2	erwinDIS			1	Validating sour	Alpha
3	erwinDIS		Data Integration	2	Customer-Acc	Alpha